



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[LOGGERHEAD]

Machine Id
JOHN DEERE 948L 714227

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222055	JR0164587	JR0165146
Sample Date		Client Info		08 Jul 2024	05 Jan 2024	07 Aug 2023
Machine Age	hrs	Client Info		4162	3092	2254
Oil Age	hrs	Client Info		0	3092	0
Filter Age	hrs	Client Info		0	3092	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	13	14
Iron	ppm	ASTM D5185m	>20	4	0	2
Chromium	ppm	ASTM D5185m	>10	1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	2	2	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	2	5
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1341	3873	2028
Particles >6µm		ASTM D7647	>1300	216	878	465
Particles >14µm		ASTM D7647	>160	25	121	29
Particles >21µm		ASTM D7647	>40	9	39	7
Particles >38µm		ASTM D7647	>10	0	2	1
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/12	19/17/14	18/16/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		4	<1	4
Calcium	ppm	ASTM D5185m		846	776	754
Phosphorus	ppm	ASTM D5185m		779	736	797
Zinc	ppm	ASTM D5185m		932	863	1014
Sulfur	ppm	ASTM D5185m		2490	1875	2603
Acid Number (AN)	mg KOH/g	ASTM D8045		0.80	0.59	0.79
Visc @ 40°C	cSt	ASTM D445		50.1	51.9	52.3

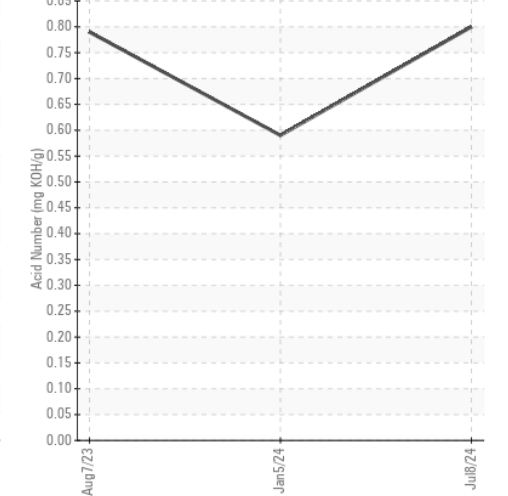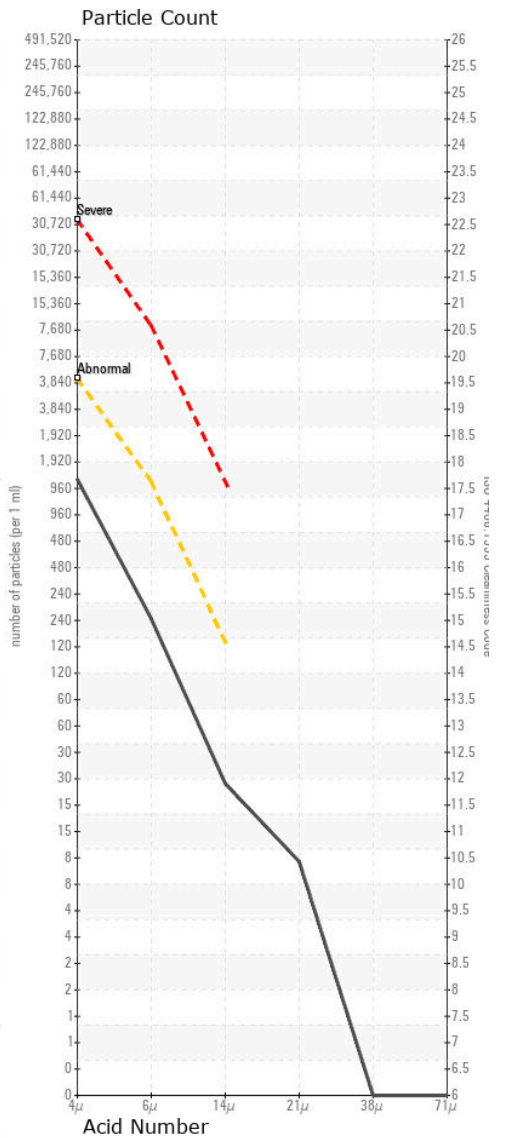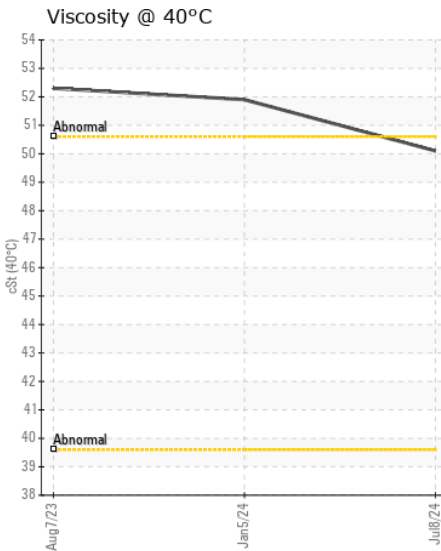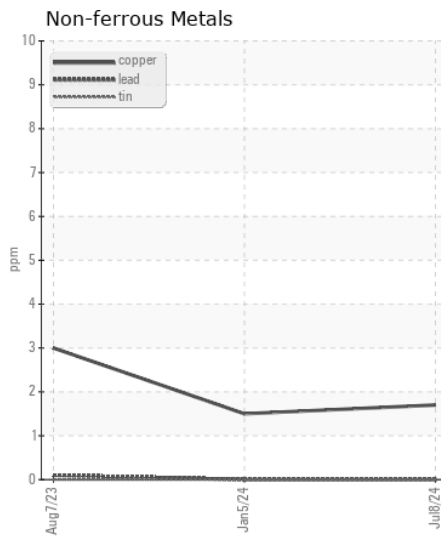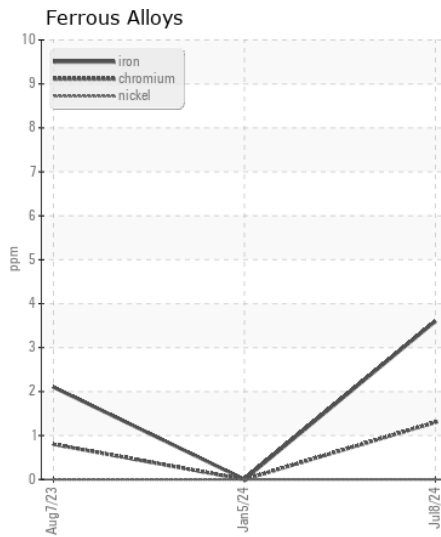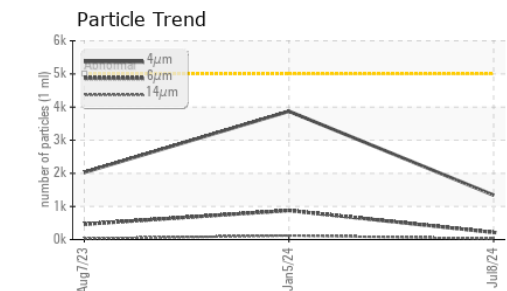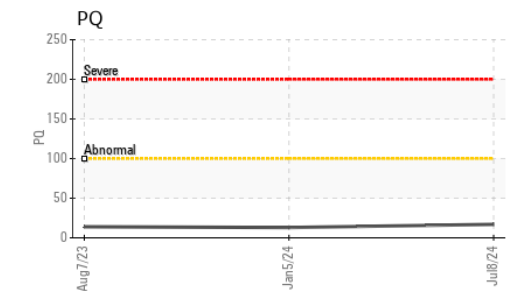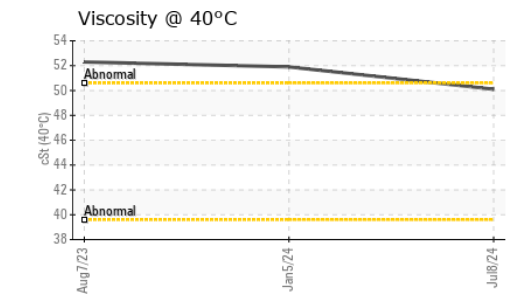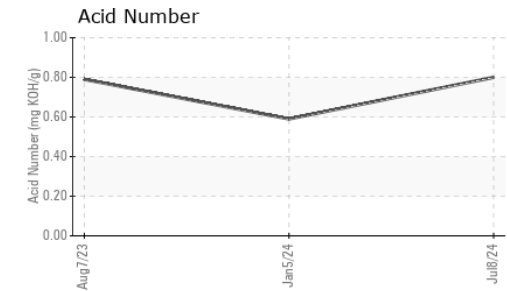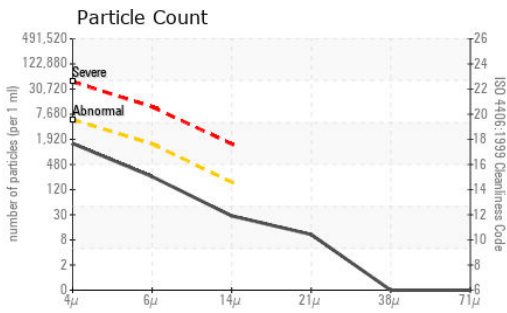

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222055 **Received** : 17 Jul 2024
Lab Number : 06239092 **Tested** : 18 Jul 2024
Unique Number : 11127926 **Diagnosed** : 19 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)