



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PAUL F BROTZGE**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 220 (220 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0066347</b>	MW0053157	MW0069290
Sample Date		Client Info		<b>26 Jun 2024</b>	01 Jun 2024	01 May 2024
Machine Age	hrs	Client Info		<b>64869</b>	64029	63335
Oil Age	hrs	Client Info		<b>64869</b>	64029	63335
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>100</b>	37	61
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	<1	1
Titanium	ppm	ASTM D5185m		<b>1</b>	1	1
Silver	ppm	ASTM D5185m		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	4
Lead	ppm	ASTM D5185m	>100	<b>3</b>	2	2
Copper	ppm	ASTM D5185m	>50	<b>15</b>	6	11
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	8	6
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	6	4
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>26</b>	4	18
Boron	ppm	ASTM D5185m	40	<b>4</b>	4	<1
Barium	ppm	ASTM D5185m		<b>1</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>5</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>2</b>	2	1
Calcium	ppm	ASTM D5185m		<b>19</b>	77	20
Phosphorus	ppm	ASTM D5185m	270	<b>215</b>	275	129
Zinc	ppm	ASTM D5185m		<b>9</b>	33	2
Sulfur	ppm	ASTM D5185m	8600	<b>5134</b>	5502	3351
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	<b>0.76</b>	0.66	0.81
Visc @ 40°C	cSt	ASTM D445	209	<b>230</b>	226	227

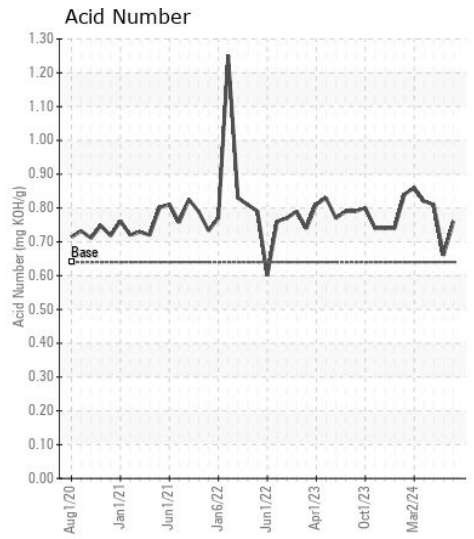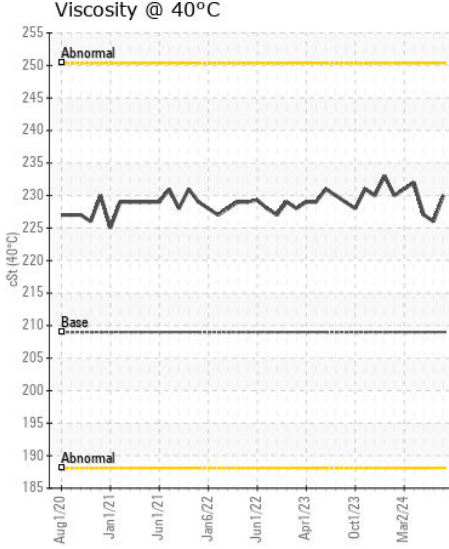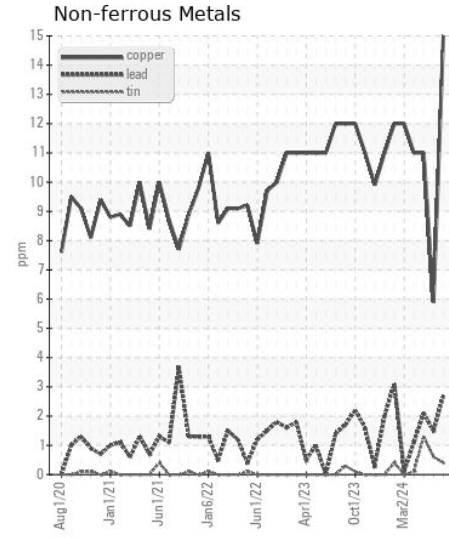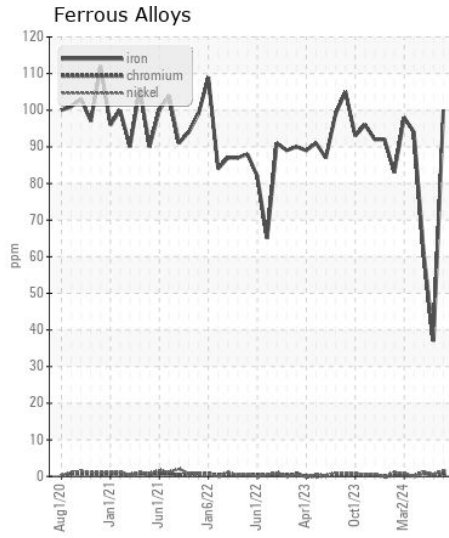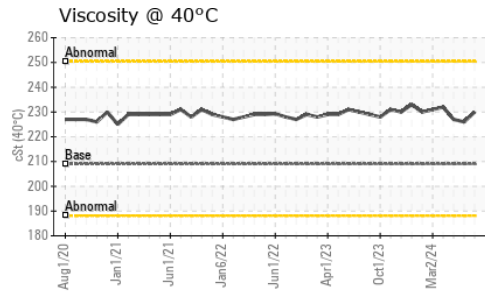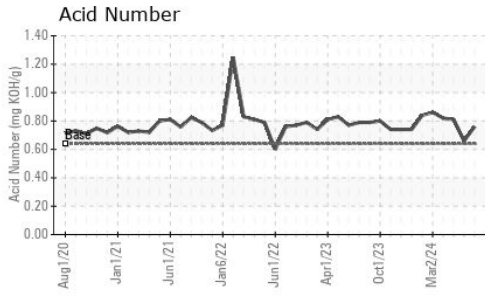

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0066347  
**Lab Number** : 06239294  
**Unique Number** : 11128128  
**Test Package** : MAR 2  
**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**AMERICAN COMMERCIAL LINES**  
 PO BOX 610, 1701 E. MARKET STREET  
 JEFFERSONVILLE, IN  
 US 47130  
 Contact: RONALD SCHNEIDER  
 ronald.schneider@bargeacbl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (812)288-1644