



Machine Id  
**KENNY EADS (S/N 1494)**  
Component  
**Starboard Reduction Gear**  
Fluid  
**CHEVRON MEROPA 220 (170 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0069640</b>	MW0066470	MW0055740
Sample Date		Client Info		<b>14 Jul 2024</b>	15 May 2024	15 Mar 2024
Machine Age	hrs	Client Info		<b>21506</b>	20127	18696
Oil Age	hrs	Client Info		<b>21046</b>	20127	18696
Filter Age	hrs	Client Info		<b>0</b>	19667	18696
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>50</b>	52	40
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>100	<b>1</b>	1	<1
Copper	ppm	ASTM D5185m	>50	<b>4</b>	3	3
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>7</b>	7	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	3
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	3	3
Boron	ppm	ASTM D5185m	40	<b>4</b>	10	4
Barium	ppm	ASTM D5185m		<b>4</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>3</b>	2	2
Calcium	ppm	ASTM D5185m		<b>17</b>	59	24
Phosphorus	ppm	ASTM D5185m	270	<b>249</b>	236	257
Zinc	ppm	ASTM D5185m		<b>13</b>	12	4
Sulfur	ppm	ASTM D5185m	8600	<b>8415</b>	8473	8314
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	<b>0.55</b>	0.60	0.64
Visc @ 40°C	cSt	ASTM D445	209	<b>213</b>	218	217

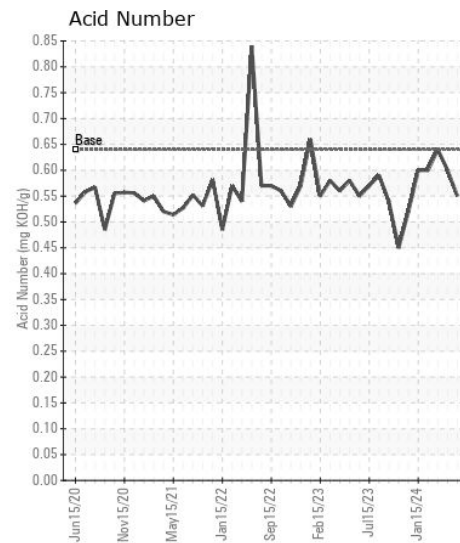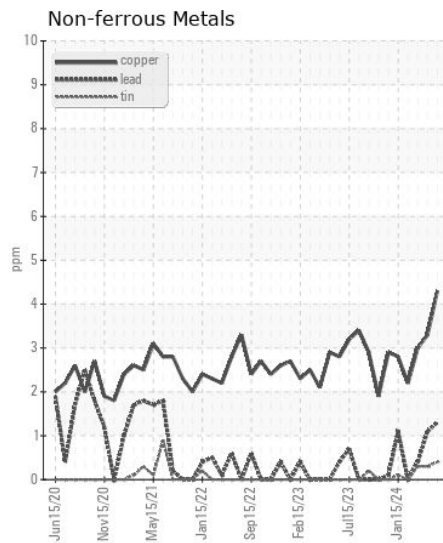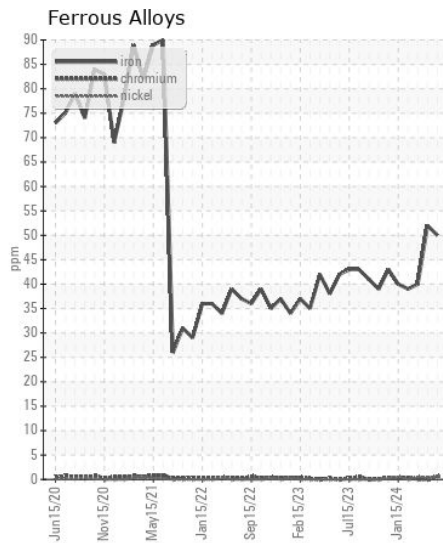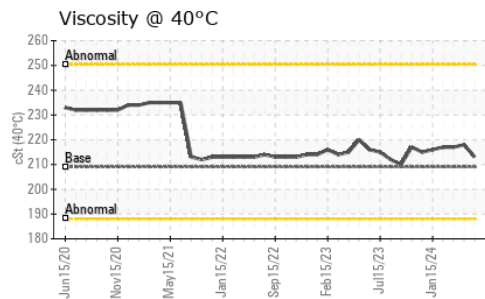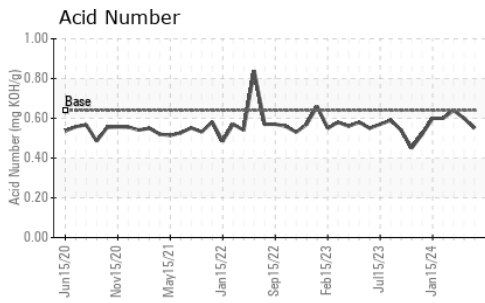

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0069640  
**Lab Number** : 06239297  
**Unique Number** : 11128131  
**Test Package** : MAR 2

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Wes Davis

**AMERICAN COMMERCIAL LINES**  
 PO BOX 610, 1701 E. MARKET STREET  
 JEFFERSONVILLE, IN  
 US 47130  
 Contact: RONALD SCHNEIDER  
 ronald.schneider@bargeacbl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (812)288-1644