



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

[W52913 SLURRY POWERS]

Machine Id
JOHN DEERE 524 P 1DW524PAENLZ14391

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224574	JR0147272	---
Sample Date		Client Info		11 Jul 2024	06 Dec 2022	---
Machine Age	hrs	Client Info		2626	1265	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	MARGINAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	14	11	---
Iron	ppm	ASTM D5185m	>200	9	25	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	<1	---
Lead	ppm	ASTM D5185m	>45	<1	<1	---
Copper	ppm	ASTM D5185m	>225	12	6	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	18	▲ 118	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	23	---
Boron	ppm	ASTM D5185m	6	0	1	---
Barium	ppm	ASTM D5185m	0	<1	2	---
Molybdenum	ppm	ASTM D5185m	0	1	2	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	145	93	90	---
Calcium	ppm	ASTM D5185m	3570	3404	3372	---
Phosphorus	ppm	ASTM D5185m	1290	900	1039	---
Zinc	ppm	ASTM D5185m	1640	1208	1296	---
Sulfur	ppm	ASTM D5185m		3378	4330	---
Visc @ 40°C	cSt	ASTM D445	57.0	53.5	44.4	---

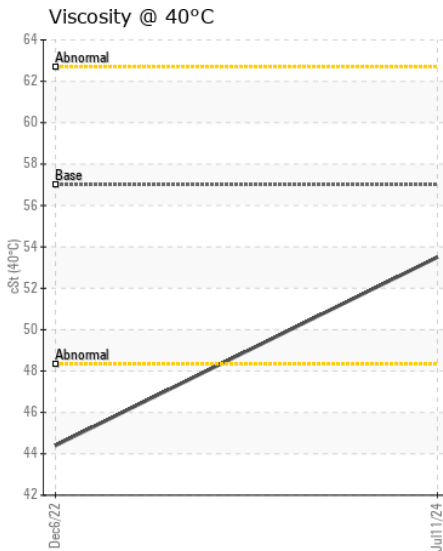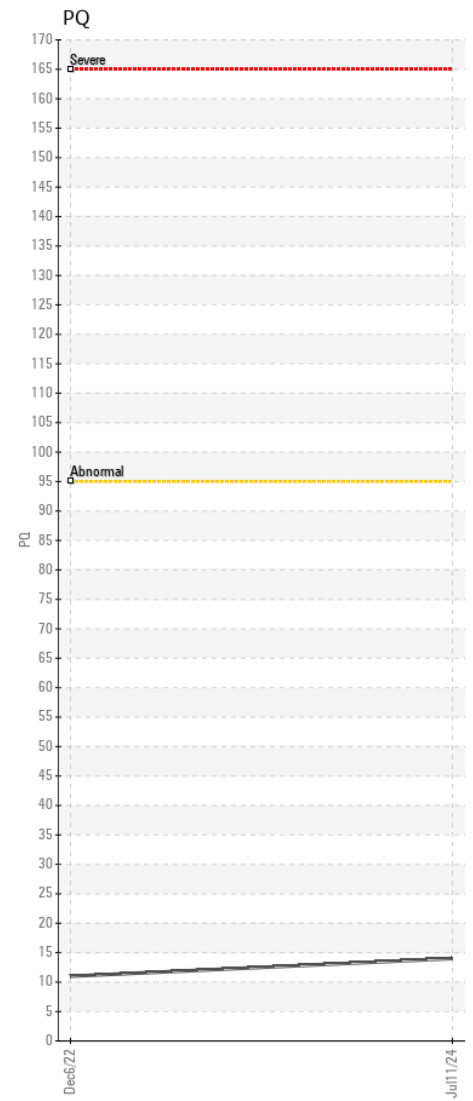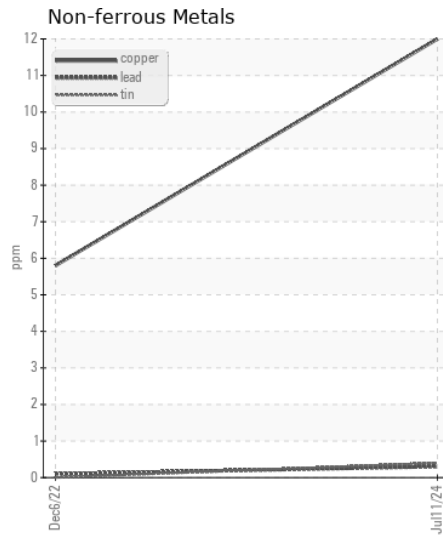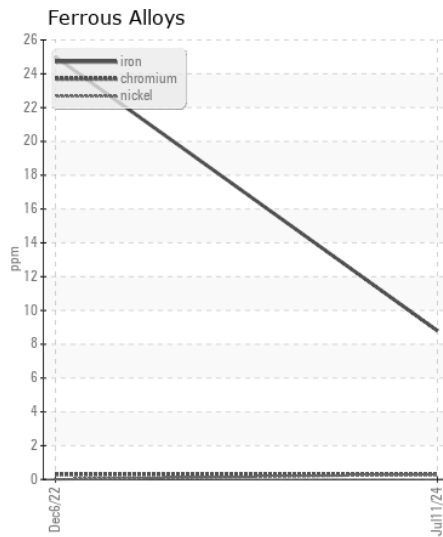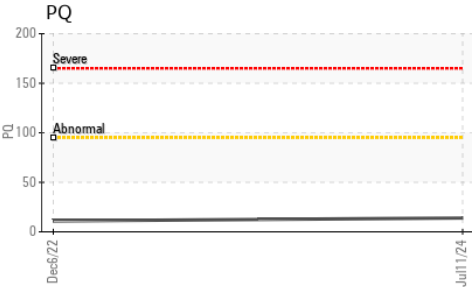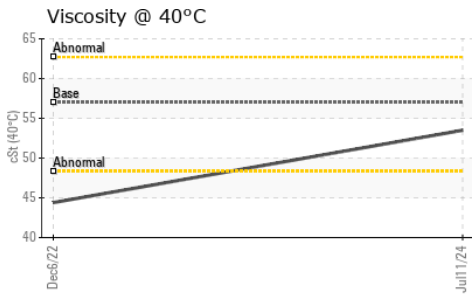

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0224574 **Received** : 17 Jul 2024
Lab Number : 06239351 **Tested** : 18 Jul 2024
Unique Number : 11128185 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)