



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 844L 1DW844LXLNL714450
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (18 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224517	JR0196568	JR0183388
Sample Date		Client Info		10 Jul 2024	11 Dec 2023	10 Oct 2023
Machine Age	hrs	Client Info		2986	2538	2166
Oil Age	hrs	Client Info		0	372	2166
Filter Age	hrs	Client Info		0	372	1100
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		204	115	713
Iron	ppm	ASTM D5185m	>500	592	221	1609
Chromium	ppm	ASTM D5185m	>10	3	1	8
Nickel	ppm	ASTM D5185m	>10	2	2	4
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	3	0
Lead	ppm	ASTM D5185m	>25	8	15	14
Copper	ppm	ASTM D5185m	>100	110	▲ 372	230
Tin	ppm	ASTM D5185m	>10	4	10	9
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	9	14	16
Potassium	ppm	ASTM D5185m	>20	3	<1	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	8	5
Boron	ppm	ASTM D5185m	6	12	34	39
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	4	2	9
Manganese	ppm	ASTM D5185m		14	24	41
Magnesium	ppm	ASTM D5185m	145	97	85	73
Calcium	ppm	ASTM D5185m	3570	3517	3403	3319
Phosphorus	ppm	ASTM D5185m	1290	958	1116	1098
Zinc	ppm	ASTM D5185m	1640	1268	1310	1288
Sulfur	ppm	ASTM D5185m		3774	3708	4223
Visc @ 40°C	cSt	ASTM D445	57.0	56.0	57.9	57.9

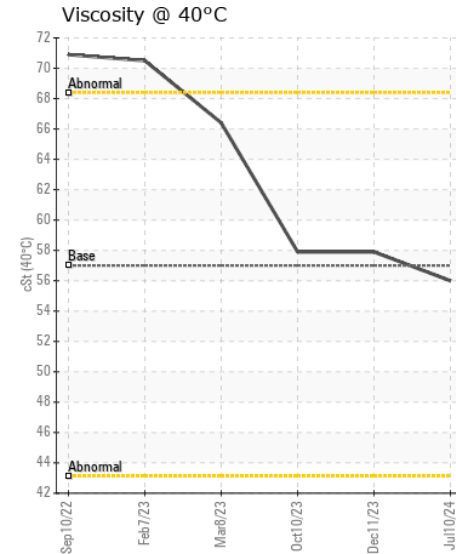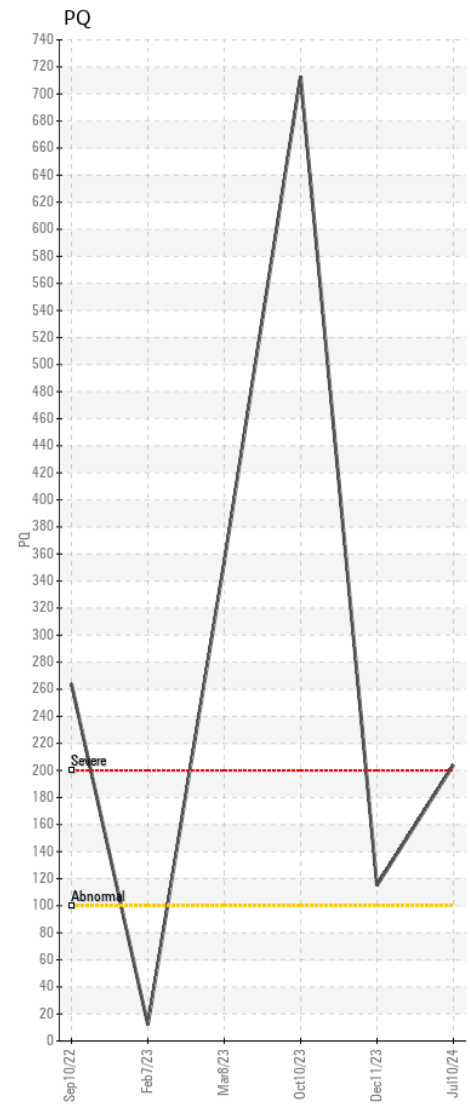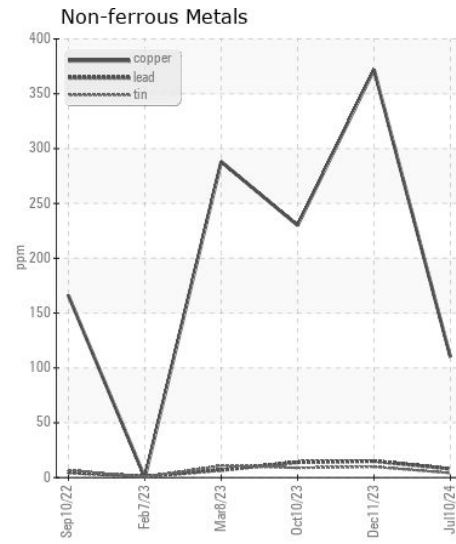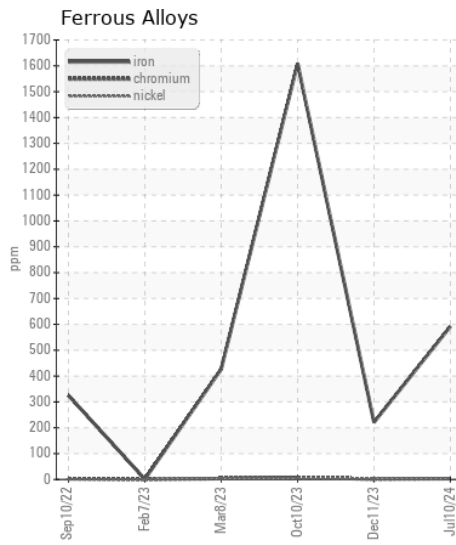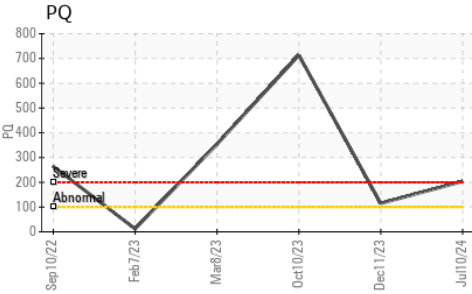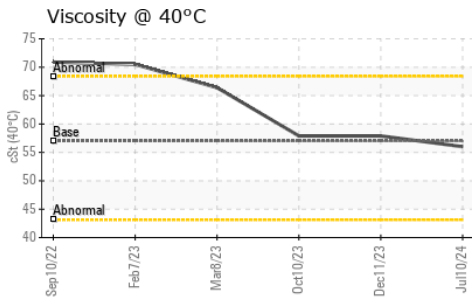

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0224517 **Received** : 17 Jul 2024
Lab Number : 06239382 **Tested** : 18 Jul 2024
Unique Number : 11128216 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292