



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
JOHN DEERE 850K 1T0850KXHJF339507
 Component
Left Final Drive
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0223368 | JR0223372 | JR0194579 |
| Sample Date | | Client Info | | 17 Jul 2024 | 16 Jul 2024 | 04 Jan 2024 |
| Machine Age | hrs | Client Info | | 8255 | 8255 | 7545 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|------|------|
| PQ | | ASTM D8184 | >1250 | 35 | 58 | 18 |
| Iron | ppm | ASTM D5185m | >750 | 130 | 62 | 0 |
| Chromium | ppm | ASTM D5185m | >9 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | 1 | 1 | 0 |
| Titanium | ppm | ASTM D5185m | | 2 | <1 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >40 | 24 | 3 | <1 |
| Lead | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >40 | <1 | 1 | 0 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >75 | 63 | 10 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 5 | 2 | 0 |
| Water | | WC Method | >0.075 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-----|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >51 | 0 | 25 | 0 |
| Boron | ppm | ASTM D5185m | | 39 | 8 | 48 |
| Barium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 30 | 1 | 40 |
| Manganese | ppm | ASTM D5185m | | 2 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 176 | 100 | 220 |
| Calcium | ppm | ASTM D5185m | | 3178 | 3410 | 2982 |
| Phosphorus | ppm | ASTM D5185m | | 877 | 881 | 1021 |
| Zinc | ppm | ASTM D5185m | | 1188 | 1222 | 1224 |
| Sulfur | ppm | ASTM D5185m | | 3938 | 3554 | 3379 |
| Visc @ 40°C | cSt | ASTM D445 | | 52.3 | 53.2 | 65.3 |

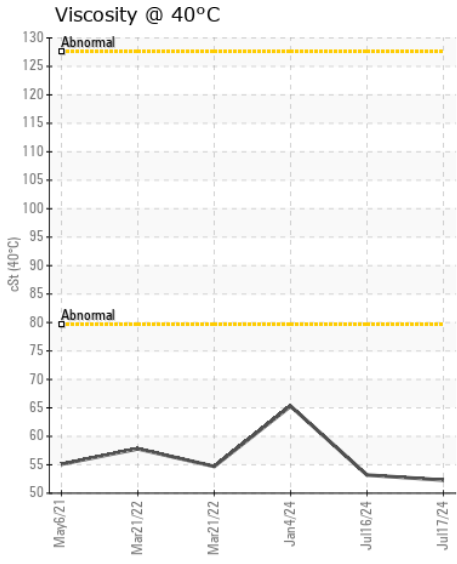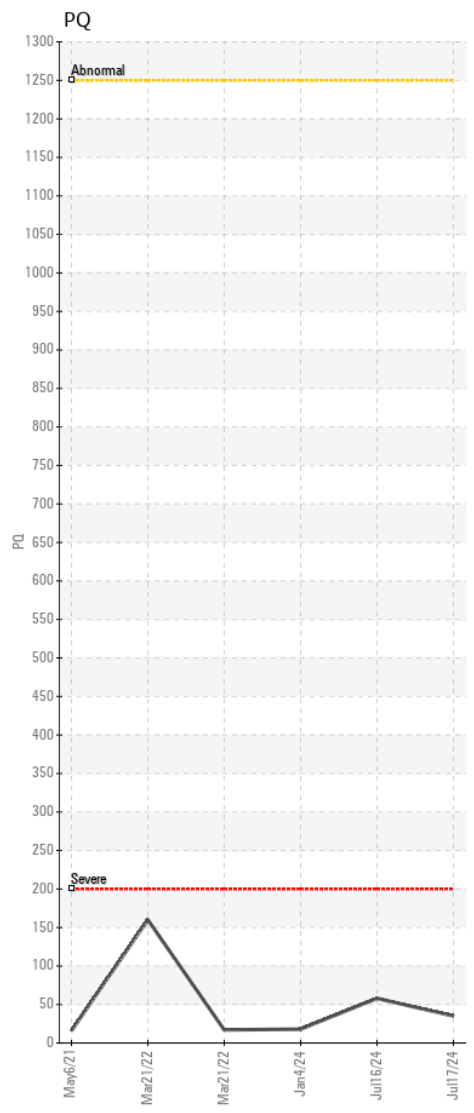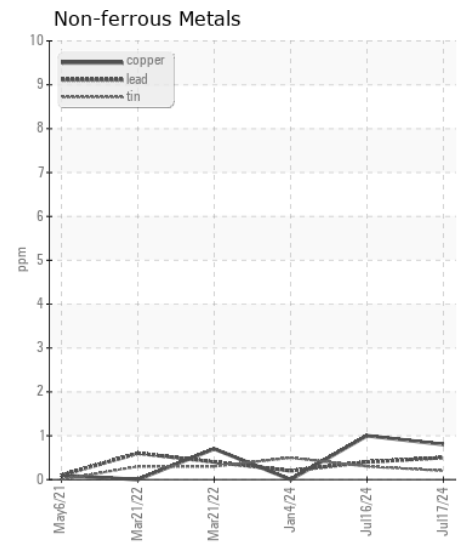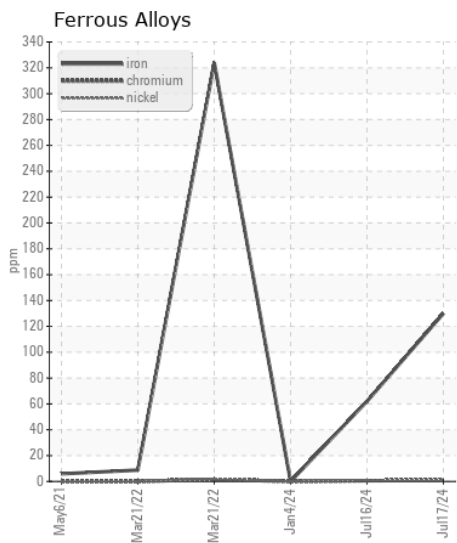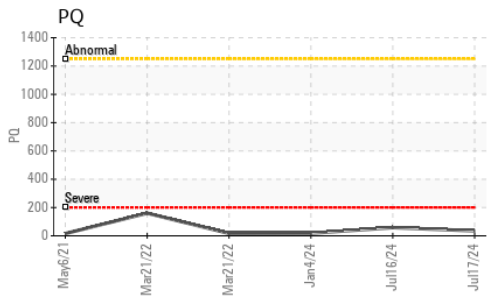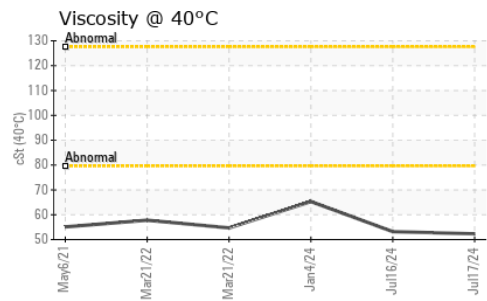

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0223368 **Received** : 17 Jul 2024
Lab Number : 06239403 **Tested** : 18 Jul 2024
Unique Number : 11128237 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)