



**James River
Equipment**

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 750K 1T0750KXEGF305475
Component
Left Final Drive
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0223034	JR0182862	JR0182859
Sample Date		Client Info		16 Jul 2024	07 Sep 2023	06 Sep 2023
Machine Age	hrs	Client Info		8854	7622	7622
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	17	103	75
Iron	ppm	ASTM D5185m	>750	5	155	60
Chromium	ppm	ASTM D5185m	>9	1	1	<1
Nickel	ppm	ASTM D5185m	>10	0	1	0
Titanium	ppm	ASTM D5185m		<1	1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	<1	20	0
Lead	ppm	ASTM D5185m	>15	0	<1	0
Copper	ppm	ASTM D5185m	>40	2	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	65	8
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	3	2
Boron	ppm	ASTM D5185m		0	45	37
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	34	30
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m		4	192	157
Calcium	ppm	ASTM D5185m		168	3463	2855
Phosphorus	ppm	ASTM D5185m		645	1004	838
Zinc	ppm	ASTM D5185m		845	1201	1003
Sulfur	ppm	ASTM D5185m		1897	5033	3495
Visc @ 40°C	cSt	ASTM D445		58.7	56.8	54.6

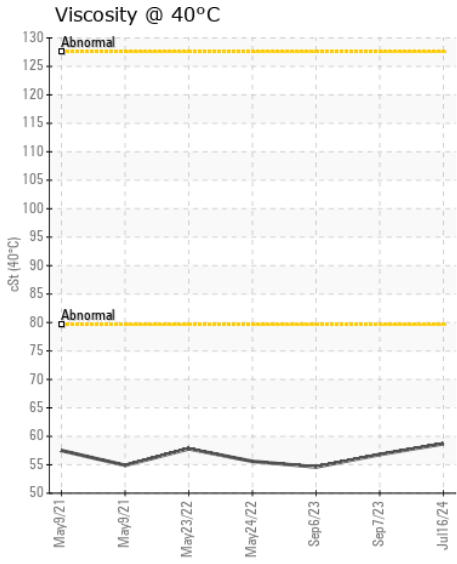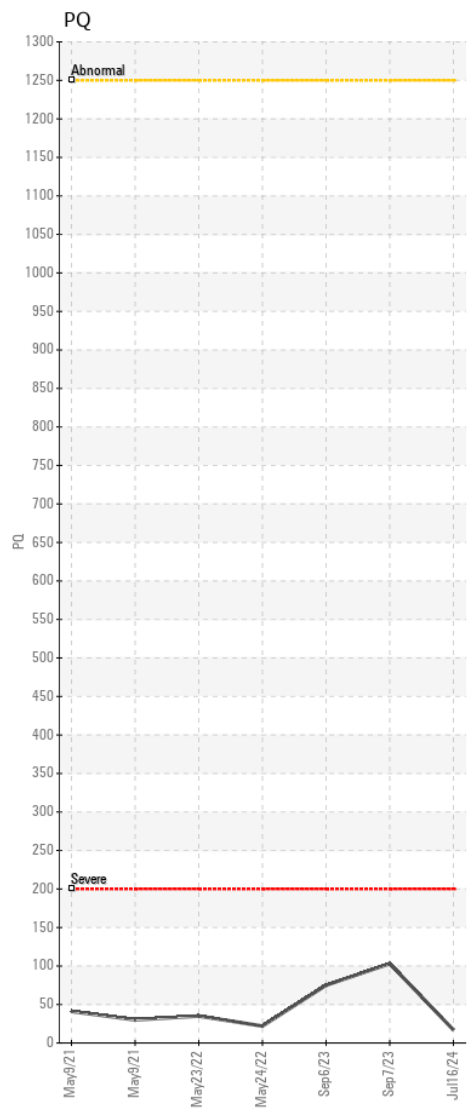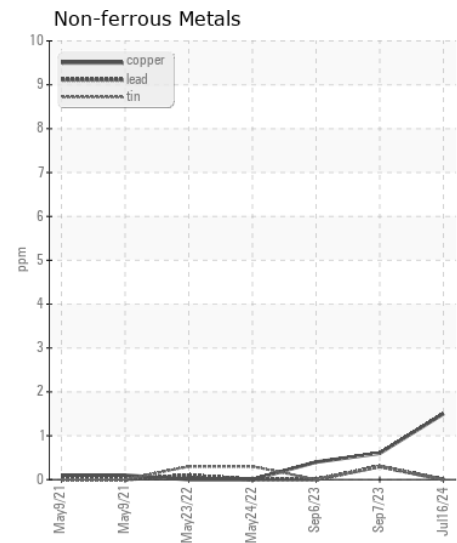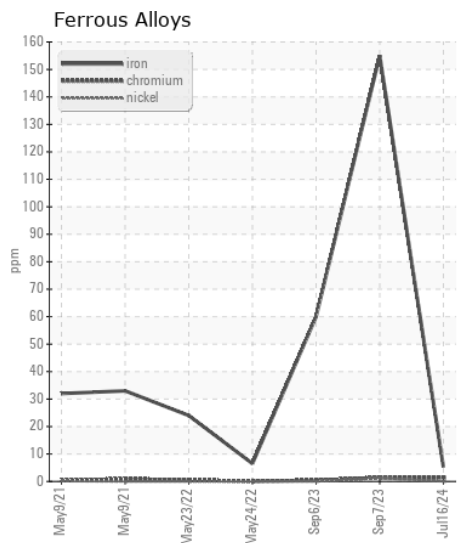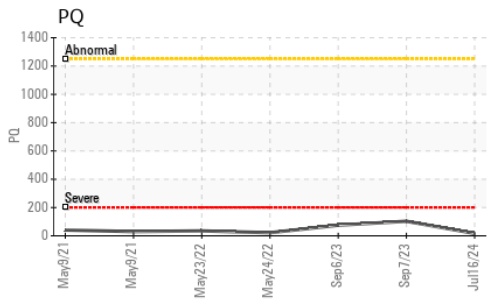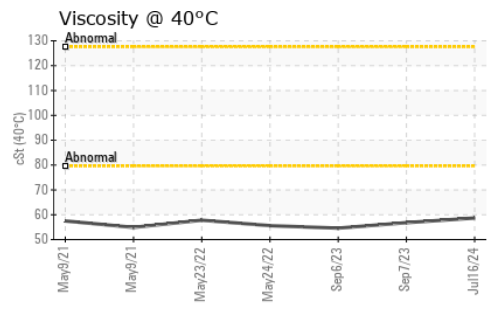

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0223034 **Received** : 17 Jul 2024
Lab Number : 06239427 **Tested** : 18 Jul 2024
Unique Number : 11128261 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)