



WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HAMM H11IXP 12-8 (S/N H2100528)

Component
Rear Axle

Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated. Bearing and/or bushing wear is indicated.







CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JRMC438548	---	---
Sample Date		Client Info		16 Jul 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184		534	---	---
Iron	ppm	ASTM D5185m	>500	▲ 2180	---	---
Chromium	ppm	ASTM D5185m	>10	7	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	1	---	---
Copper	ppm	ASTM D5185m	>50	▲ 193	---	---
Tin	ppm	ASTM D5185m	>10	▲ 12	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	23	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	150	1	---	---
Barium	ppm	ASTM D5185m		110	---	---
Molybdenum	ppm	ASTM D5185m		51	---	---
Manganese	ppm	ASTM D5185m		19	---	---
Magnesium	ppm	ASTM D5185m	10	4	---	---
Calcium	ppm	ASTM D5185m	70	34	---	---
Phosphorus	ppm	ASTM D5185m	2000	1970	---	---
Zinc	ppm	ASTM D5185m	50	73	---	---
Sulfur	ppm	ASTM D5185m	20000	34473	---	---
Visc @ 40°C	cSt	ASTM D445	140	184	---	---

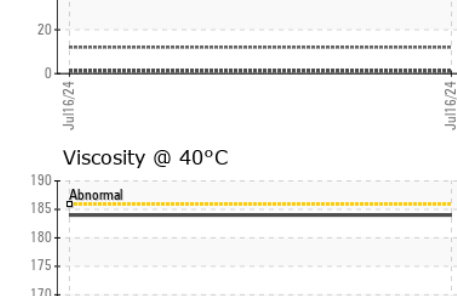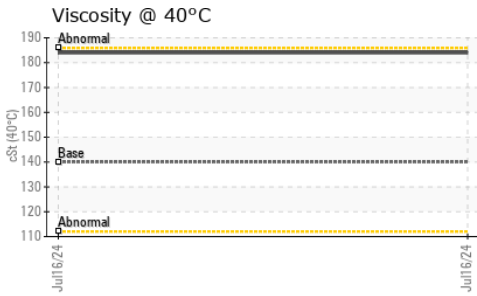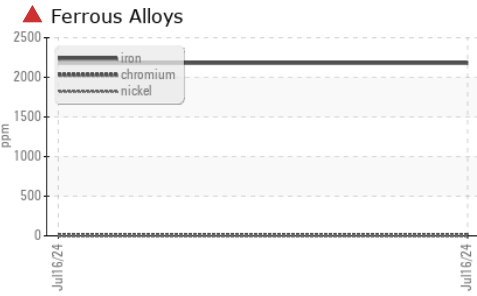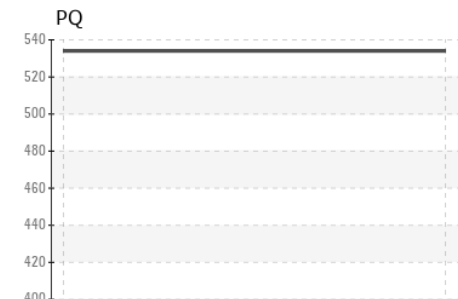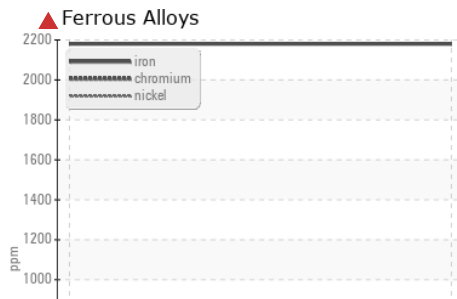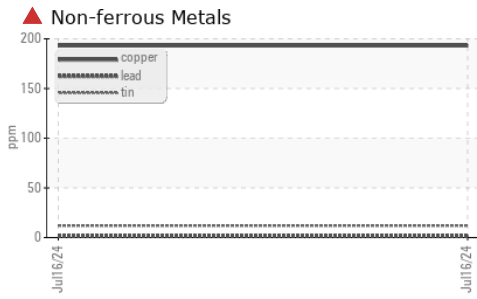

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JRMCA38548 **Received** : 17 Jul 2024
Lab Number : 06239452 **Tested** : 18 Jul 2024
Unique Number : 11128286 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

CENTERLINE CONTRACTORS
 1908 MORGAN MILL RD
 MONROE, NC
 US 28110
 Contact: MARK BRANTLEY
 mark@centerline-contractors.com
 T: (704)774-9004
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)