



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**413066**  
Component  
**1 Differential**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: 1st Axle / Pusher )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0123570</b>	GFL0112080	GFL0085435
Sample Date		Client Info		<b>11 Jul 2024</b>	25 Apr 2024	06 Jul 2023
Machine Age	mls	Client Info		<b>64312</b>	64312	21532
Oil Age	mls	Client Info		<b>64312</b>	64312	21532
Filter Age	mls	Client Info		<b>0</b>	64312	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	<b>173</b>	91	170
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>20	<b>3</b>	4	6
Titanium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	<b>24</b>	29	62
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>3</b>	2	5
Boron	ppm	ASTM D5185m	400	<b>34</b>	86	261
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	2	3
Magnesium	ppm	ASTM D5185m	12	<b>4</b>	1	0
Calcium	ppm	ASTM D5185m	150	<b>691</b>	● 138	5
Phosphorus	ppm	ASTM D5185m	1650	<b>567</b>	● 583	981
Zinc	ppm	ASTM D5185m	125	<b>319</b>	● 223	7
Sulfur	ppm	ASTM D5185m	22500	<b>11561</b>	● 9632	24164
Visc @ 40°C	cSt	ASTM D445	143	<b>53.5</b>	● 59.1	128

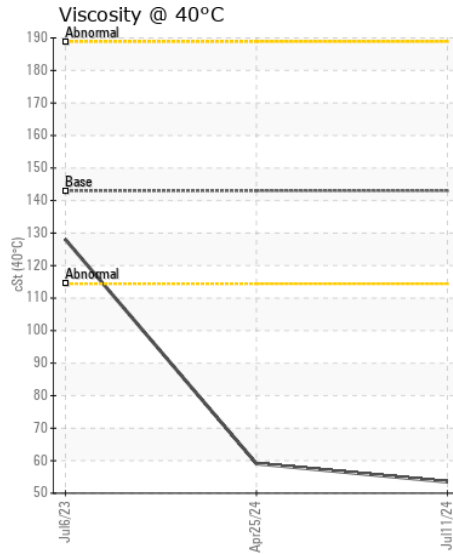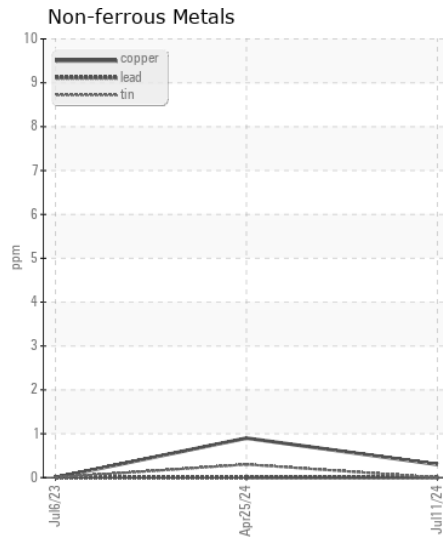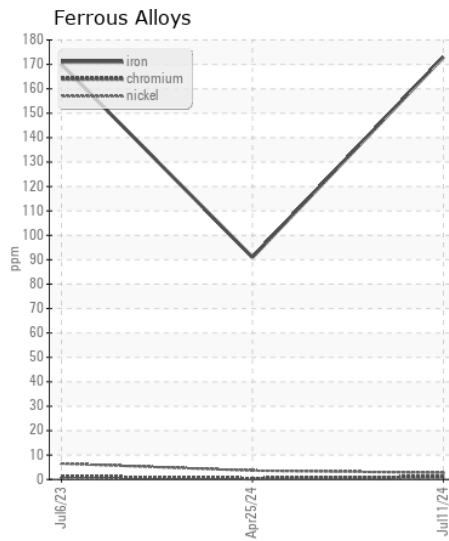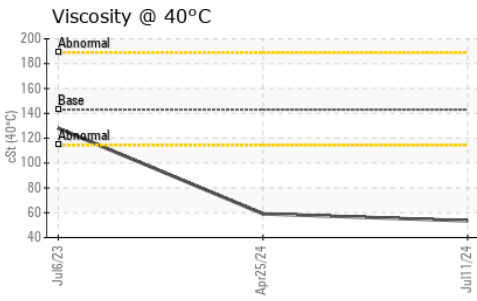

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123570  
**Lab Number** : 06239481  
**Unique Number** : 11128315  
**Test Package** : FLEET

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: