



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**420092**  
Component  
**2 Differential**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: 2nd Axle / Tag )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0123577</b>	GFL0123607	GFL0112067
Sample Date		Client Info		<b>12 Jul 2024</b>	29 May 2024	18 Mar 2024
Machine Age	mls	Client Info		<b>162521</b>	151032	150271
Oil Age	mls	Client Info		<b>162521</b>	151035	150271
Filter Age	mls	Client Info		<b>0</b>	0	150271
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	None	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	<b>356</b>	192	214
Chromium	ppm	ASTM D5185m	>8	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m	>20	<b>4</b>	10	11
Titanium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>21</b>	11	11
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	<b>63</b>	104	72
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>2</b>	3	2
Boron	ppm	ASTM D5185m	400	<b>21</b>	19	53
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	12	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>3</b>	2	3
Magnesium	ppm	ASTM D5185m	12	<b>2</b>	<1	<1
Calcium	ppm	ASTM D5185m	150	<b>29</b>	43	109
Phosphorus	ppm	ASTM D5185m	1650	<b>395</b>	543	650
Zinc	ppm	ASTM D5185m	125	<b>69</b>	55	278
Sulfur	ppm	ASTM D5185m	22500	<b>15080</b>	13480	10372
Visc @ 40°C	cSt	ASTM D445	143	<b>44.2</b>	38.5	71.4

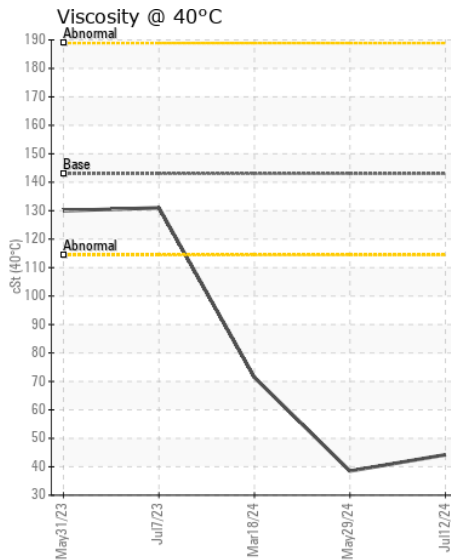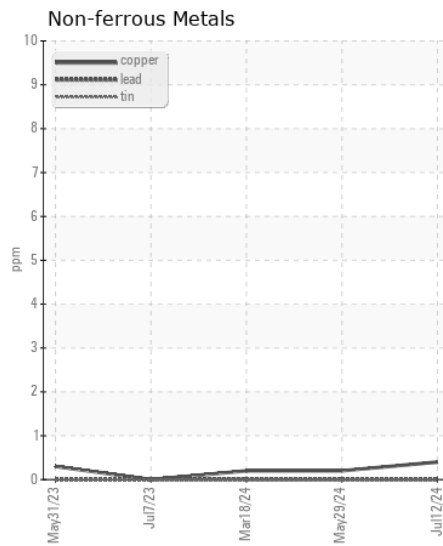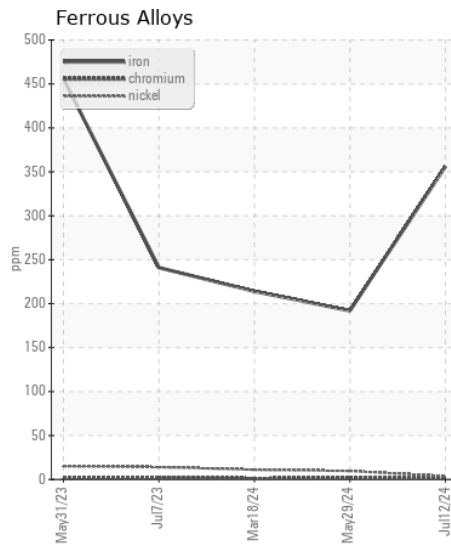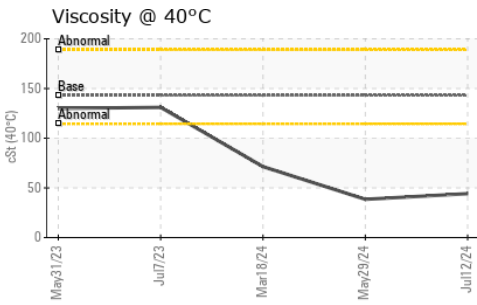

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123577  
**Lab Number** : 06239486  
**Unique Number** : 11128320  
**Test Package** : FLEET

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: