



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(SHK8967)**  
Machine Id  
**413068**  
Component  
**Transmission (Manual)**  
Fluid  
**Transmission Oil (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0123574</b>	GFL0094090	GFL0075396
Sample Date		Client Info		<b>12 Jul 2024</b>	08 Nov 2023	16 May 2023
Machine Age	mls	Client Info		<b>104942</b>	48261	23358
Oil Age	mls	Client Info		<b>104942</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>4</b>	17	47
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>18</b>	64	50
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>12</b>	18	34
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	2	3
Boron	ppm	ASTM D5185m		<b>0</b>	3	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	0	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	31
Magnesium	ppm	ASTM D5185m		<b>7</b>	6	2
Calcium	ppm	ASTM D5185m		<b>2788</b>	2618	904
Phosphorus	ppm	ASTM D5185m		<b>901</b>	844	696
Zinc	ppm	ASTM D5185m		<b>1064</b>	955	4
Sulfur	ppm	ASTM D5185m		<b>3865</b>	3784	5928
Visc @ 40°C	cSt	ASTM D445		<b>52.2</b>	52.5	103

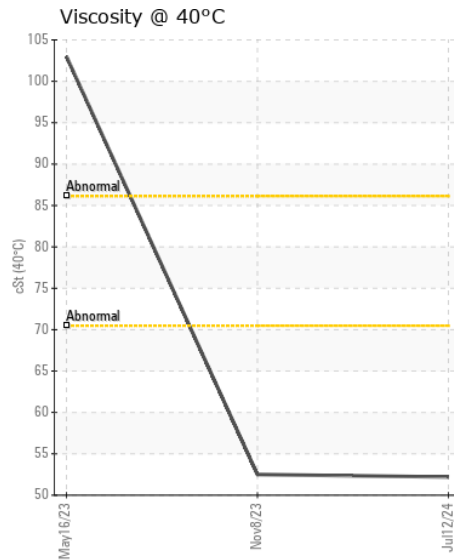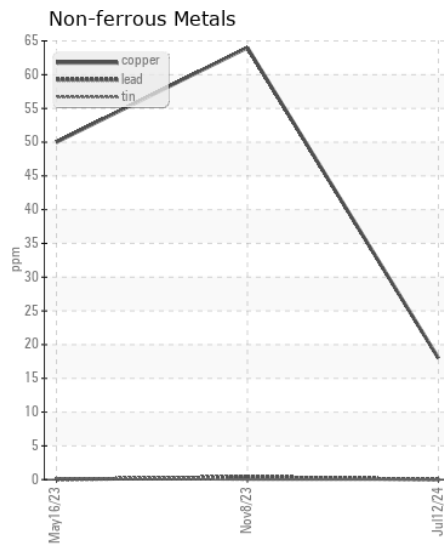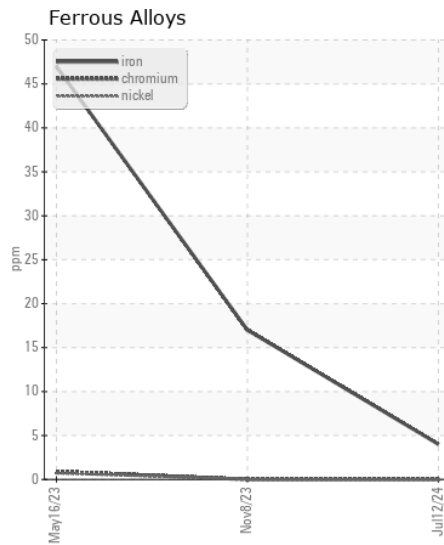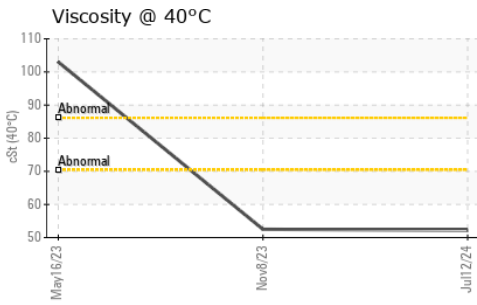

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123574  
**Lab Number** : 06239505  
**Unique Number** : 11128339  
**Test Package** : FLEET

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: