



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[730409 RENTALS]

Machine Id

VOLVO A25G 752678

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP441150	VCP440248	---
Sample Date		Client Info		08 Jul 2024	06 Oct 2023	---
Machine Age	hrs	Client Info		2073	803	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>175	42	22	---
Chromium	ppm	ASTM D5185m	>2	<1	0	---
Nickel	ppm	ASTM D5185m	>5	2	1	---
Titanium	ppm	ASTM D5185m	>5	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>50	35	18	---
Lead	ppm	ASTM D5185m	>75	0	0	---
Copper	ppm	ASTM D5185m	>400	32	20	---
Tin	ppm	ASTM D5185m	>20	6	4	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>40	14	15	---
Potassium	ppm	ASTM D5185m	>20	3	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	5	---
Boron	ppm	ASTM D5185m	187	66	73	---
Barium	ppm	ASTM D5185m	0.0	1	<1	---
Molybdenum	ppm	ASTM D5185m	0.0	0	0	---
Manganese	ppm	ASTM D5185m	0.0	4	3	---
Magnesium	ppm	ASTM D5185m	6.8	1	4	---
Calcium	ppm	ASTM D5185m	215	69	77	---
Phosphorus	ppm	ASTM D5185m	445	178	194	---
Zinc	ppm	ASTM D5185m	56	7	3	---
Sulfur	ppm	ASTM D5185m	1336	1956	1864	---
Visc @ 40°C	cSt	ASTM D445	35.3	28.4	29.0	---

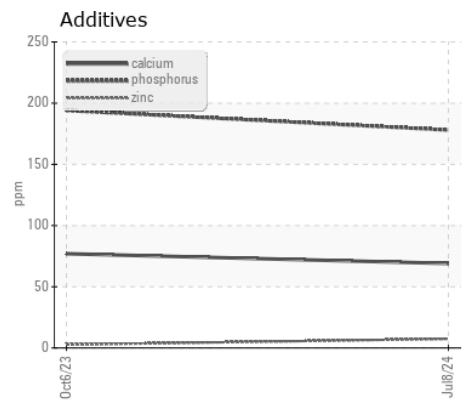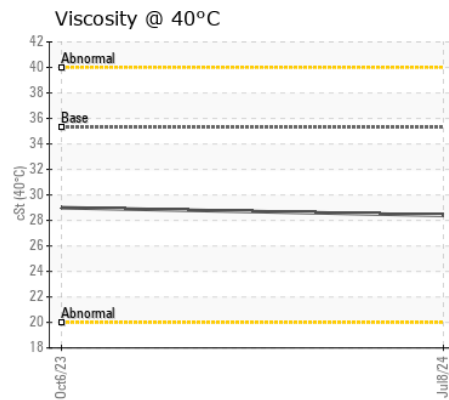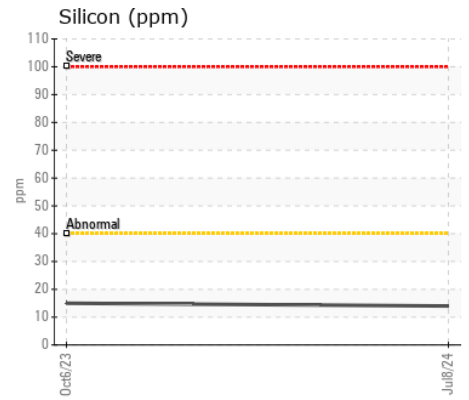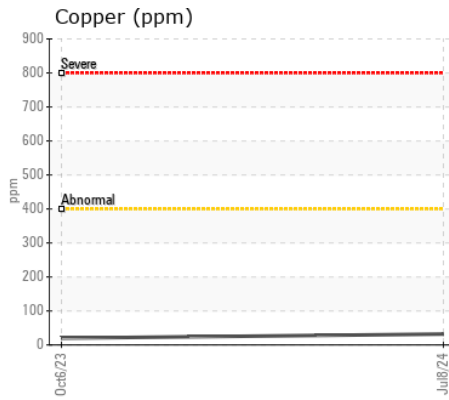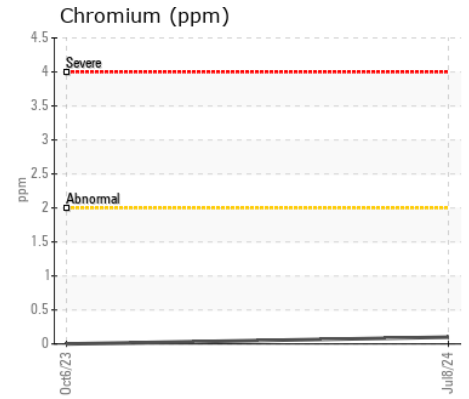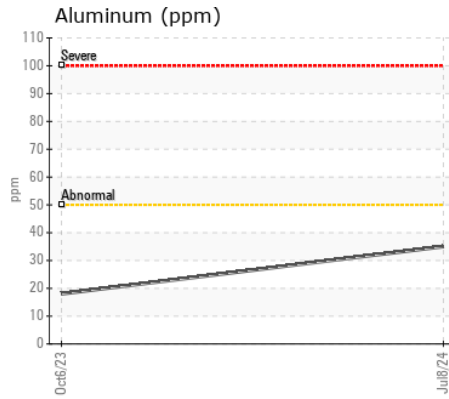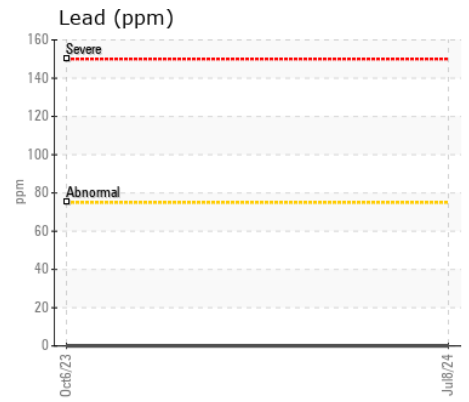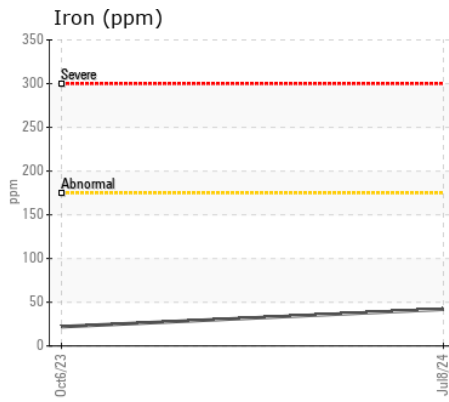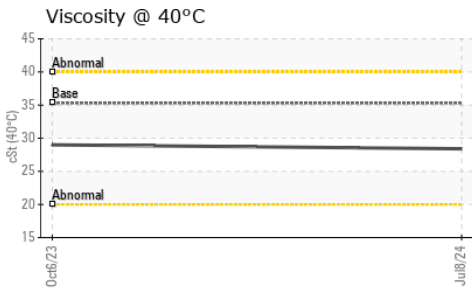

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP441150

Lab Number : 06239511

Unique Number : 11128345

Test Package : MOB 1

Received : 17 Jul 2024

Tested : 18 Jul 2024

Diagnosed : 19 Jul 2024 - Sean Felton

ALTA EQUIPMENT COMPANY

5210 REESE ROAD

DAVIE, FL

US 33314

Contact: N. FACEY

nfacey@altaequipfl.com

T: (954)581-4744

F: (954)583-0318

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)