



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
T15
 Component
2 Differential
 Fluid
TRC MOLY ULTRA-TEC GEAR OIL 85W140 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001654	TR0001273	---
Sample Date		Client Info		15 Jul 2024	24 Oct 2023	---
Machine Age	hrs	Client Info		2629	1320	---
Oil Age	hrs	Client Info		2629	1320	---
Filter Age	hrs	Client Info		0	1320	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	135	101	---
Chromium	ppm	ASTM D5185m	>10	1	1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	2	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	23	18	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	7	---
Boron	ppm	ASTM D5185m		70	84	---
Barium	ppm	ASTM D5185m		1	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		11	10	---
Magnesium	ppm	ASTM D5185m		195	167	---
Calcium	ppm	ASTM D5185m		9	6	---
Phosphorus	ppm	ASTM D5185m		1727	1503	---
Zinc	ppm	ASTM D5185m		14	9	---
Sulfur	ppm	ASTM D5185m		27248	21230	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.57	0.56	---
Visc @ 40°C	cSt	ASTM D445		95.5	99.7	---
Visc @ 100°C	cSt	ASTM D445	30	14.2	14.4	---
Viscosity Index (VI)	Scale	ASTM D2270	105	152	148	---

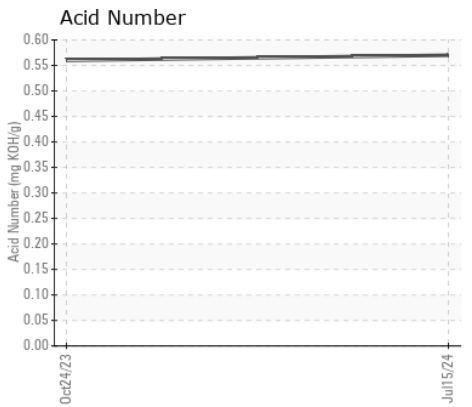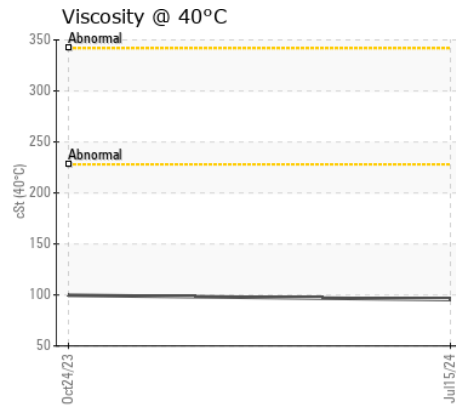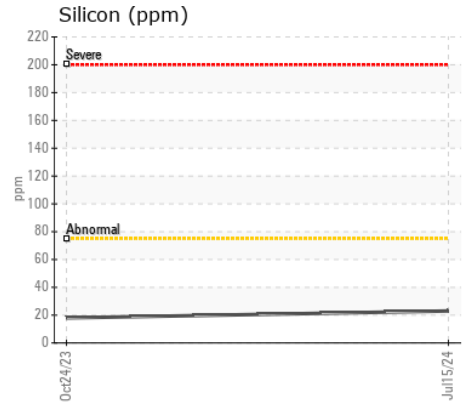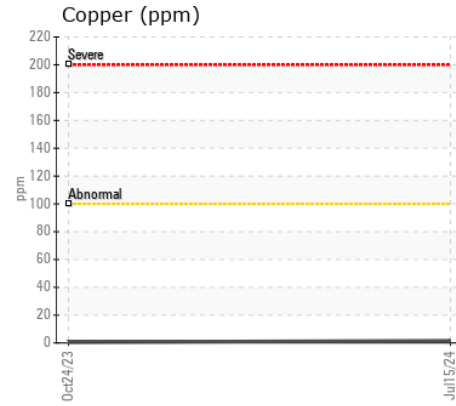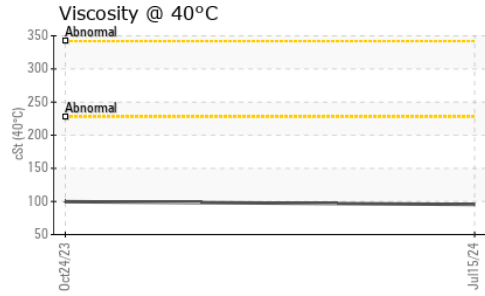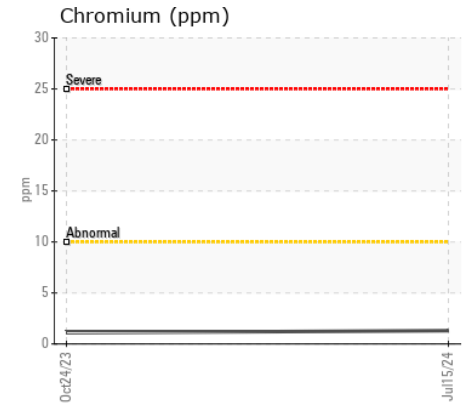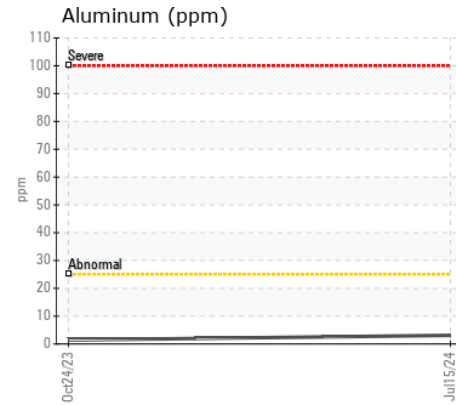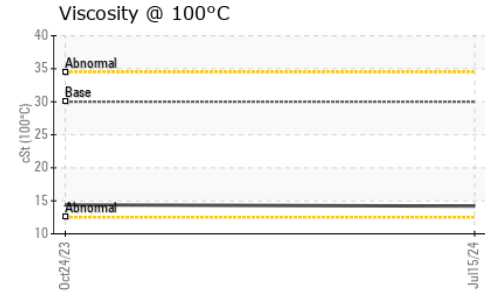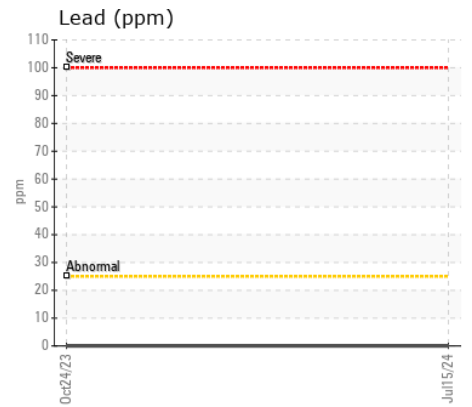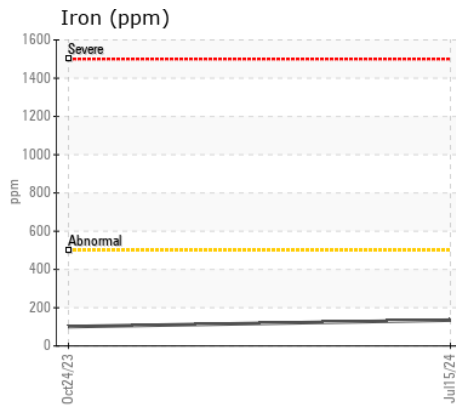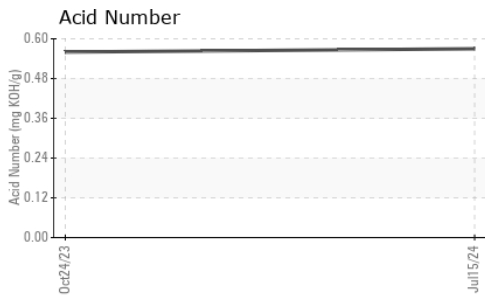

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR0001654 **Received** : 17 Jul 2024
Lab Number : 06239629 **Tested** : 18 Jul 2024
Unique Number : 11128463 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

S S CONCRETE MATERIALS LLC
P.O. BOX 23283
BULLHEAD CITY, AZ
US 86439
Contact: SNS INVENTORY
snsinventory@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (928)754-1991