



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**EASG 1013922**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.  
 Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0911183</b>	WC0668856	WC0495852
Sample Date		Client Info		<b>27 May 2024</b>	24 Apr 2022	24 Sep 2020
Machine Age	hrs	Client Info		<b>5783</b>	3105	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>8</b>	9	15
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	1	10
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	5	16
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.0</b>	8.0	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	22.2	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>2</b>	2	4
Boron	ppm	ASTM D5185m	250	<b>303</b>	329	110
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>83</b>	105	37
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>481</b>	567	703
Calcium	ppm	ASTM D5185m	3000	<b>1398</b>	1572	1497
Phosphorus	ppm	ASTM D5185m	1150	<b>1024</b>	806	649
Zinc	ppm	ASTM D5185m	1350	<b>1206</b>	877	783
Sulfur	ppm	ASTM D5185m	4250	<b>3705</b>	2463	2449
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.8</b>	17.5	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.9</b>	8.8	7.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.7</b>	12.8	13.2

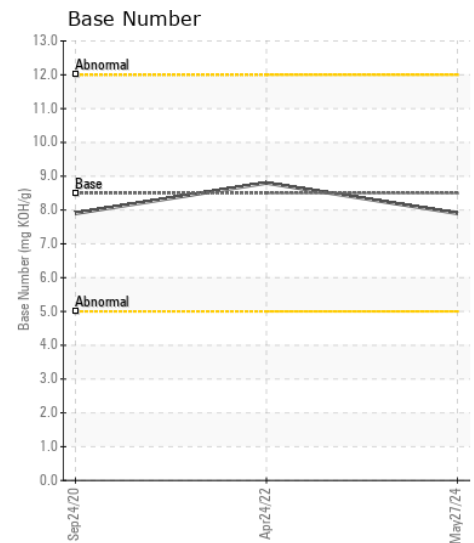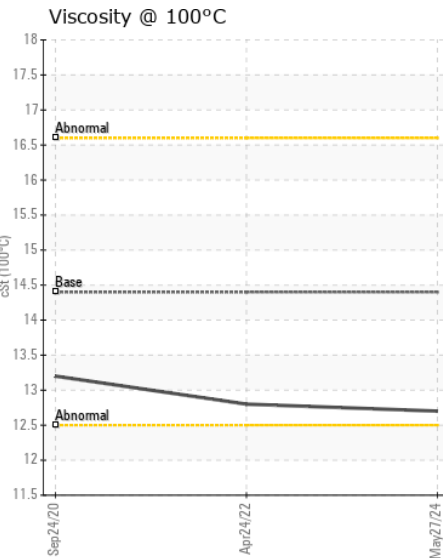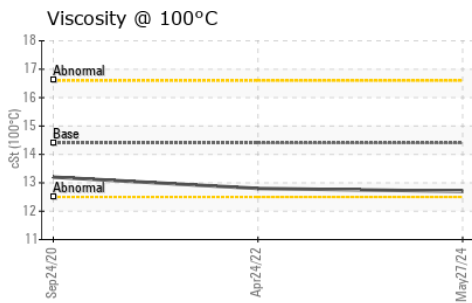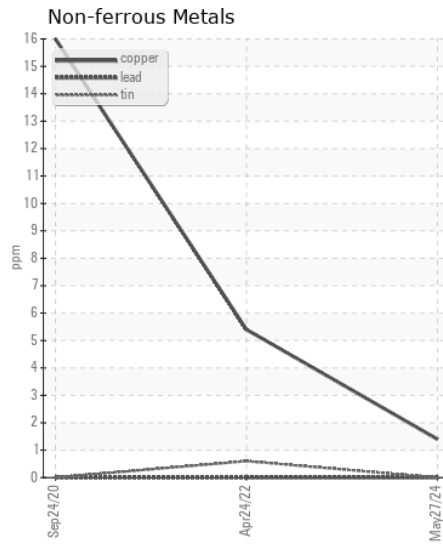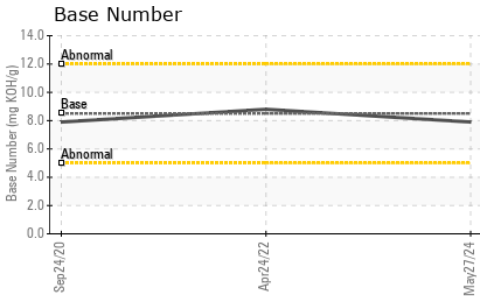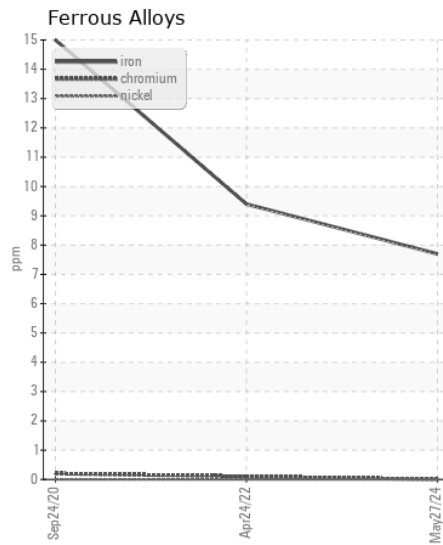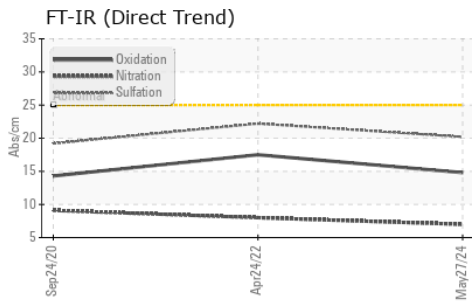

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0911183  
**Lab Number** : 06239747  
**Unique Number** : 11128581  
**Test Package** : FLEET

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Wes Davis

**DOLE FRESH FRUIT**  
 PO BOX 725, ATTN: MAINTENANCE AND REPAIR  
 NEW CASTLE, DE  
 US 19720

Contact: LUIS LAPIERRE  
 luis.lapierre@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (302)652-6344  
 F: (302)652-6061