



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Pillen Family Farms

Machine Id
LSTK63

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		SBP0005310	SBP0006856	SBP0006877
Sample Date		Client Info		10 Jul 2024	11 Jun 2024	08 May 2024
Machine Age	mls	Client Info		12000	12000	12000
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	7	10	10
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	3	4	4
Lead	ppm	ASTM D5185m	>40	0	2	<1
Copper	ppm	ASTM D5185m	>330	<1	1	0
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	4	4
Potassium	ppm	ASTM D5185m	>20	2	4	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	6.6	6.7	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	19.2	19.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	2	1
Boron	ppm	ASTM D5185m	250	3	<1	0
Barium	ppm	ASTM D5185m	10	0	1	0
Molybdenum	ppm	ASTM D5185m	100	57	62	63
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	450	958	951	1098
Calcium	ppm	ASTM D5185m	3000	1065	1092	1266
Phosphorus	ppm	ASTM D5185m	1150	1024	1106	1174
Zinc	ppm	ASTM D5185m	1350	1269	1252	1483
Sulfur	ppm	ASTM D5185m	4250	3465	3093	3997
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	14.0	13.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.2	7.9	8.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.8	14.1


FT-IR (Direct Trend)

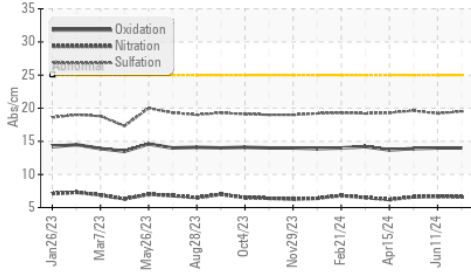


Base Number

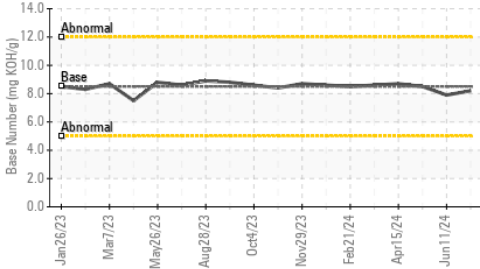


Viscosity @ 100°C

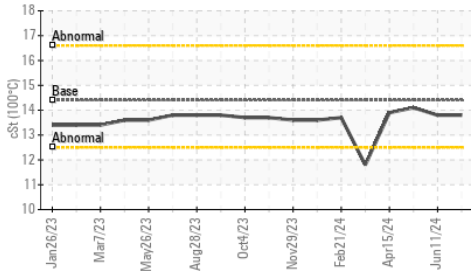


Ferrous Alloys

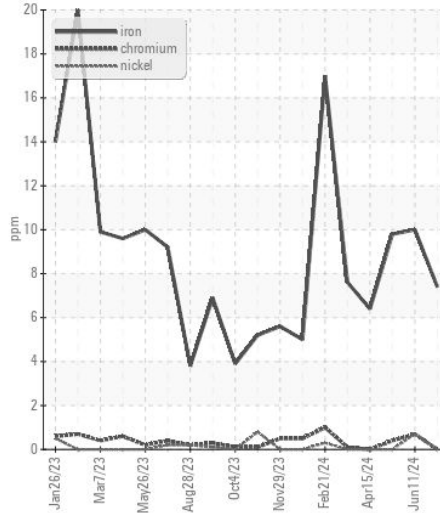


Non-ferrous Metals

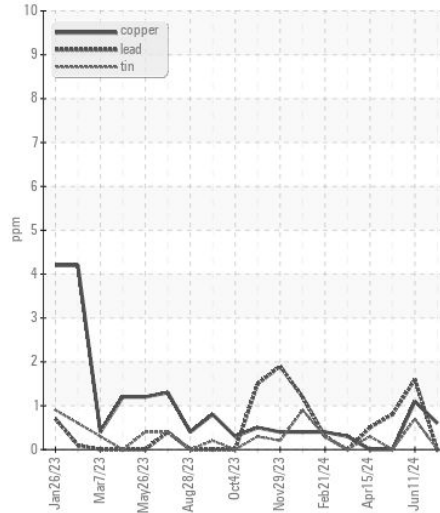

Viscosity @ 100°C

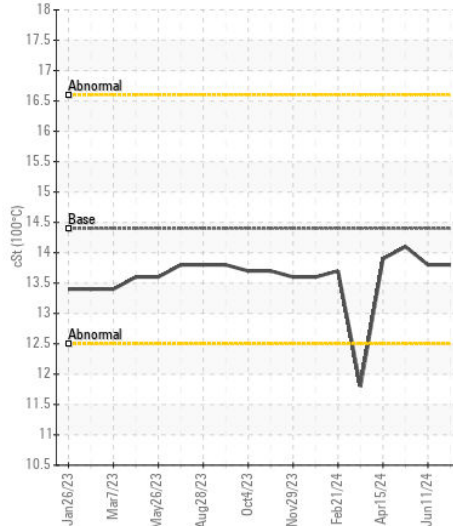

Base Number

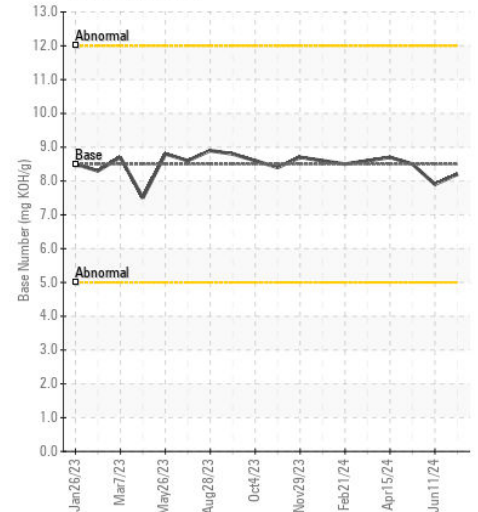

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005310 **Received** : 17 Jul 2024
Lab Number : 06239780 **Tested** : 18 Jul 2024
Unique Number : 11128614 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : FLEET

Pillen Family Farms - 722828
 26741 NE-91
 Humphrey, NE
 US 61357
 Contact: Troy Runge
 troyfr@pillenfamilyfarms.com
 T: (308)390-6733
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)