



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**DFGS273020**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### RECOMMENDATION

Check for low coolant level. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0911157</b>	WC0731460	WC0641861
Sample Date		Client Info		<b>12 May 2024</b>	27 Dec 2022	02 Jan 2022
Machine Age	hrs	Client Info		<b>11064</b>	10025	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	5	9
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION









Sodium and/or potassium levels are high. Test for glycol is negative.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	6.4	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	20.9	21.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	<b>279</b>	8	2
Boron	ppm	ASTM D5185m	250	<b>108</b>	333	294
Barium	ppm	ASTM D5185m	10	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m	100	<b>68</b>	81	97
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>802</b>	386	548
Calcium	ppm	ASTM D5185m	3000	<b>1206</b>	1356	1514
Phosphorus	ppm	ASTM D5185m	1150	<b>1045</b>	884	780
Zinc	ppm	ASTM D5185m	1350	<b>1281</b>	1171	976
Sulfur	ppm	ASTM D5185m	4250	<b>3653</b>	3387	2913
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.7</b>	16.1	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.5</b>	7.9	8.6
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.7</b>	13.0	13.0

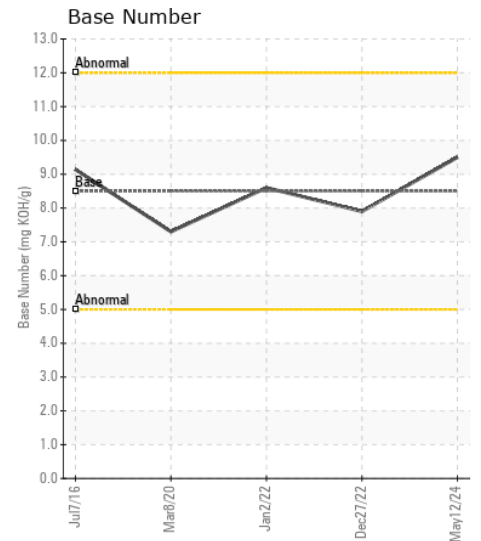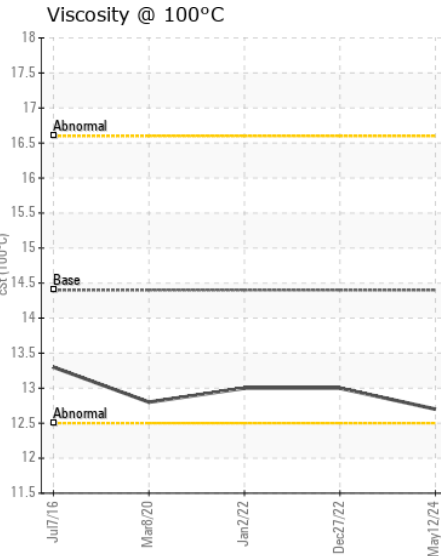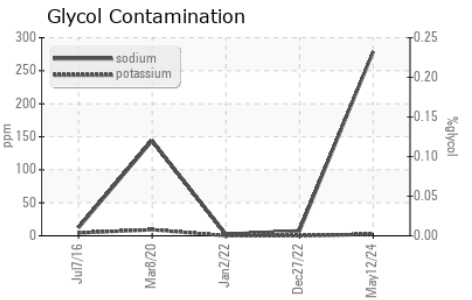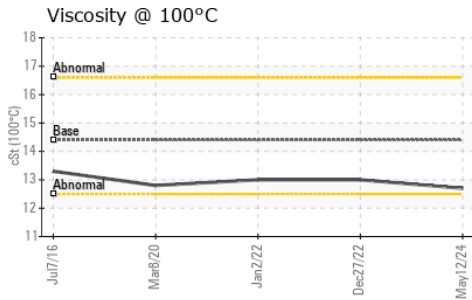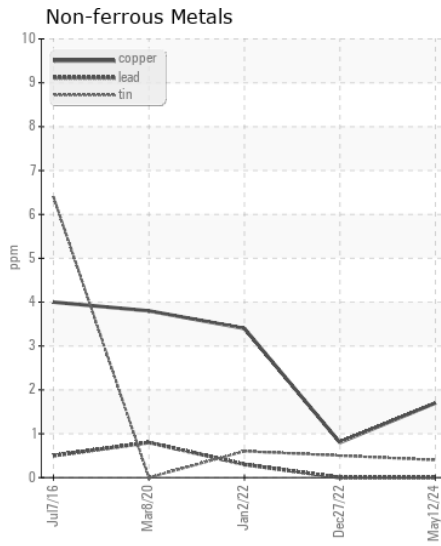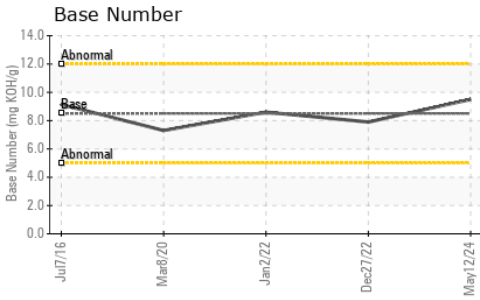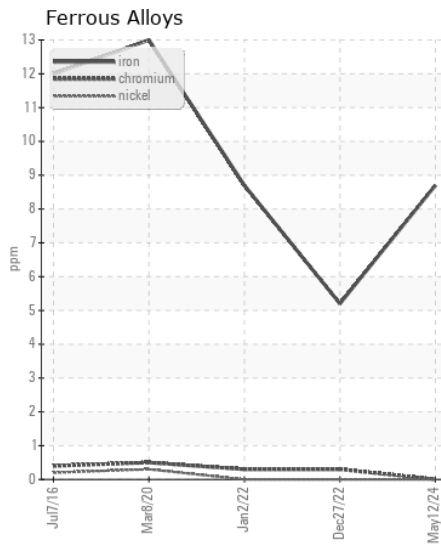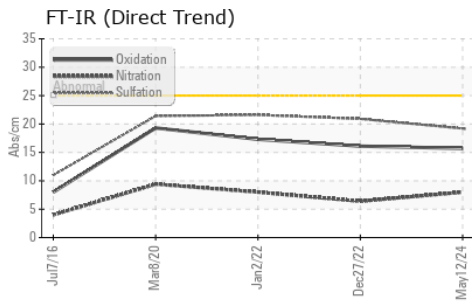

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0911157

Lab Number : 06239813

Unique Number : 11128647

Test Package : FLEET ( Additional Tests: Glycol )

Received : 17 Jul 2024

Tested : 19 Jul 2024

Diagnosed : 19 Jul 2024 - Sean Felton

DOLE FRESH FRUIT

PO BOX 725, ATTN: MAINTENANCE AND REPAIR

NEW CASTLE, DE

US 19720

Contact: LUIS LAPIERRE

luis.lapierre@dole.com

T: (302)652-6344

F: (302)652-6061

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)