



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

Ascendum Machinery

Machine Id

VOLVO L90H 624585

Component

Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009700	ASC0007036	ASC0001592
Sample Date		Client Info		15 Jul 2024	10 Apr 2024	10 Jan 2024
Machine Age	hrs	Client Info		8488	8008	7512
Oil Age	hrs	Client Info		480	496	518
Filter Age	hrs	Client Info		0	496	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	19	27	45
Chromium	ppm	ASTM D5185m	>20	2	4	9
Nickel	ppm	ASTM D5185m	>5	<1	0	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	5	7	12
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>20	1	<1	3
Tin	ppm	ASTM D5185m	>20	<1	0	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	13	19	39
Potassium	ppm	ASTM D5185m	>20	2	<1	4
Fuel		WC Method	>6.0	<1.0	3.1	8.1
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.0	7.9	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	21.7	21.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	2
Boron	ppm	ASTM D5185m		27	35	35
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		41	41	42
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		477	520	452
Calcium	ppm	ASTM D5185m		1722	1805	1553
Phosphorus	ppm	ASTM D5185m		952	1018	890
Zinc	ppm	ASTM D5185m		1137	1189	1059
Sulfur	ppm	ASTM D5185m		2878	3585	3018
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	19.6	18.9
Base Number (BN)	mg KOH/g	ASTM D2896		9.9	9.9	8.9
Visc @ 100°C	cSt	ASTM D445		13.6	12.8	11.3


FT-IR (Direct Trend)

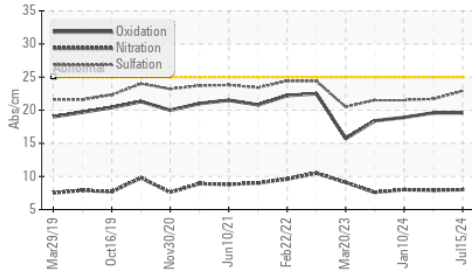


Base Number

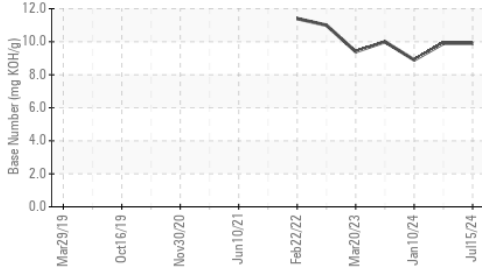


Viscosity @ 100°C

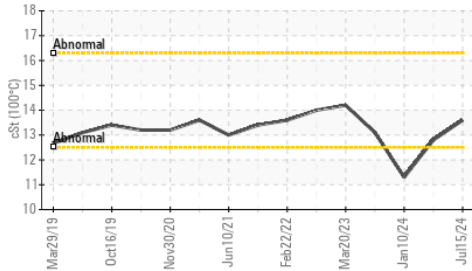


Ferrous Alloys

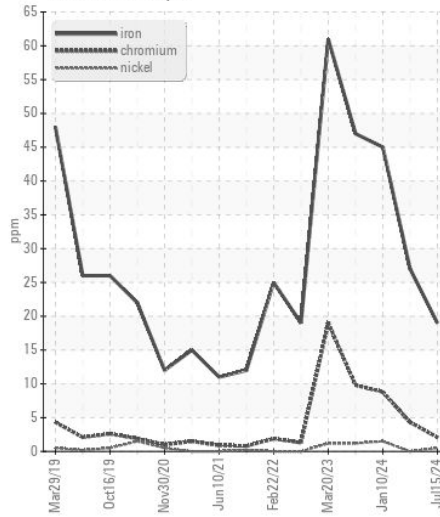


Non-ferrous Metals

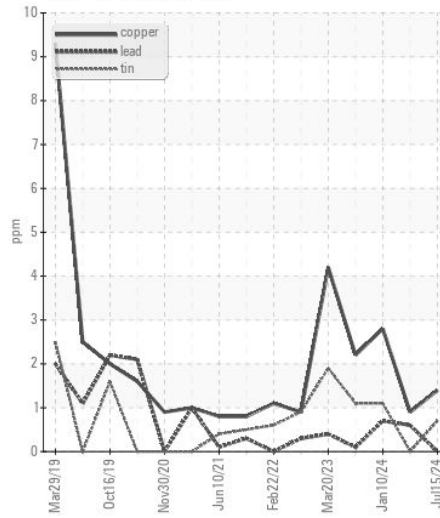

Viscosity @ 100°C

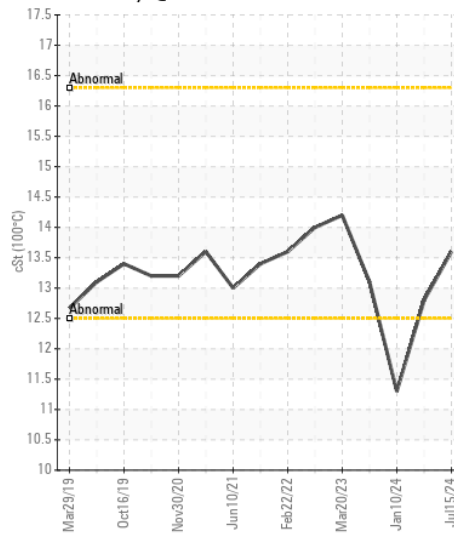

Base Number

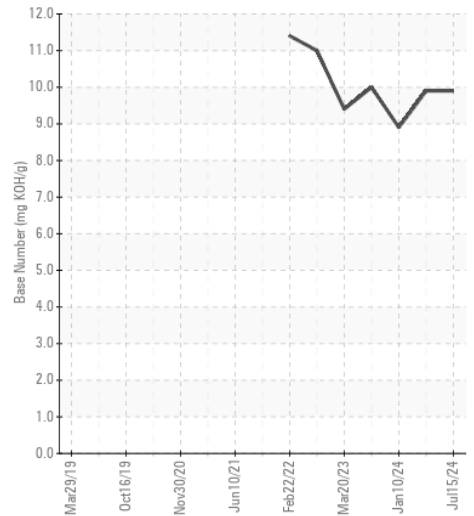

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009700 **Received** : 18 Jul 2024
Lab Number : 06239832 **Tested** : 18 Jul 2024
Unique Number : 11128666 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

IAA - INSURANCE AUTO AUCTIONS - OAK BROOK
 701 HARGER RD, SUITE 201
 OAK BROOK, IL
 US 60523
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: