



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 323 SKIDSTEER 26134 (S/N 228496)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0913550	WC0905349	WC0809941
Sample Date		Client Info		11 Jul 2024	07 Feb 2024	29 Aug 2023
Machine Age	hrs	Client Info		6377	6175	5945
Oil Age	hrs	Client Info		250	2000	271
Filter Age	hrs	Client Info		250	2000	271
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	53	55	39
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		2	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>31	7	11	24
Lead	ppm	ASTM D5185m	>26	<1	0	0
Copper	ppm	ASTM D5185m	>26	7	4	6
Tin	ppm	ASTM D5185m	>4	<1	<1	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	10	18	31
Potassium	ppm	ASTM D5185m	>20	3	2	2
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.5	6.9	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	20.6	20.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	5	6
Boron	ppm	ASTM D5185m	250	379	497	287
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	92	102	215
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	450	303	421	813
Calcium	ppm	ASTM D5185m	3000	1582	1433	1476
Phosphorus	ppm	ASTM D5185m	1150	989	999	861
Zinc	ppm	ASTM D5185m	1350	1218	1323	1059
Sulfur	ppm	ASTM D5185m	4250	3099	3224	3546
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	14.3	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	6.3	8.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	13.4	13.8


FT-IR (Direct Trend)

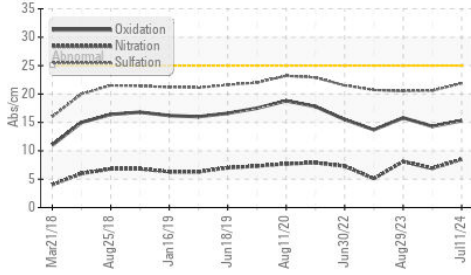


Base Number

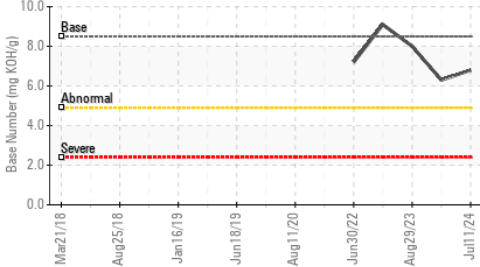


Viscosity @ 100°C

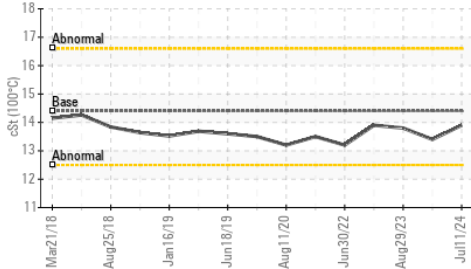


Ferrous Alloys

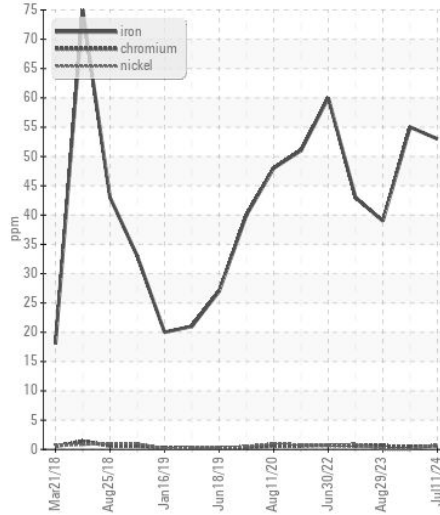


Non-ferrous Metals

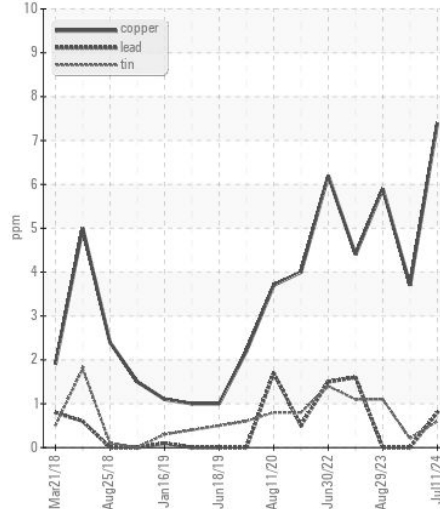

Viscosity @ 100°C

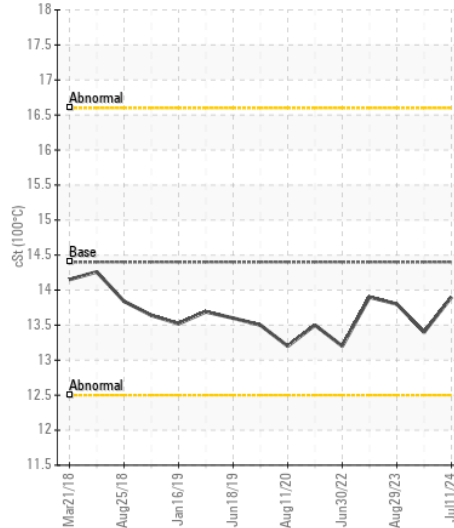

Base Number

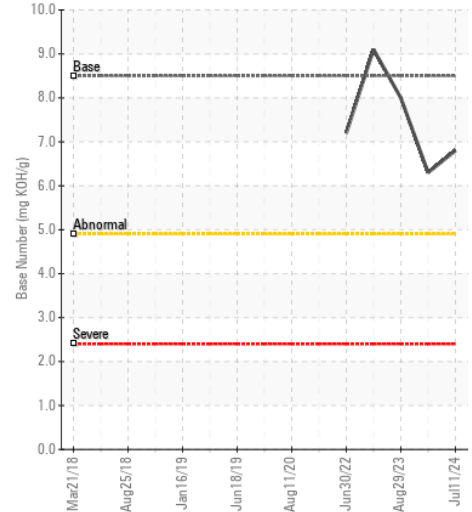

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0913550 **Received** : 18 Jul 2024
Lab Number : 06239891 **Tested** : 18 Jul 2024
Unique Number : 11128725 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560

Contact: SCOTT SULLIVAN
 ssullivan@sullivaneastern.com

T: (919)484-8993

F: (919)484-2136