



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**RBI 1310 VAC**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0950488</b>	WC0924528	WC0882723
Sample Date		Client Info		<b>13 Jul 2024</b>	01 May 2024	01 Feb 2024
Machine Age	hrs	Client Info		<b>8013</b>	7762	7542
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>40</b>	62	27
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	1	0
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	11
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	6.1	5.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.8</b>	20.3	18.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>0</b>	<1	1
Boron	ppm	ASTM D5185m	250	<b>137</b>	449	383
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>20</b>	88	81
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>645</b>	411	437
Calcium	ppm	ASTM D5185m	3000	<b>1415</b>	1472	1253
Phosphorus	ppm	ASTM D5185m	1150	<b>761</b>	1024	918
Zinc	ppm	ASTM D5185m	1350	<b>895</b>	1233	1176
Sulfur	ppm	ASTM D5185m	4250	<b>2883</b>	3751	2945
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.0</b>	14.4	12.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.3</b>	7.0	6.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.0</b>	13.9	12.5


**FT-IR (Direct Trend)**

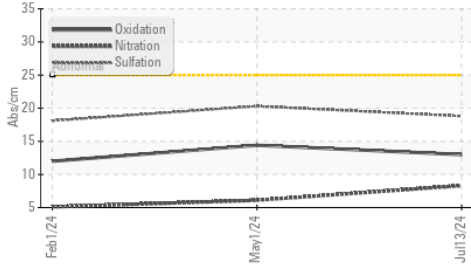


**Ferrous Alloys**

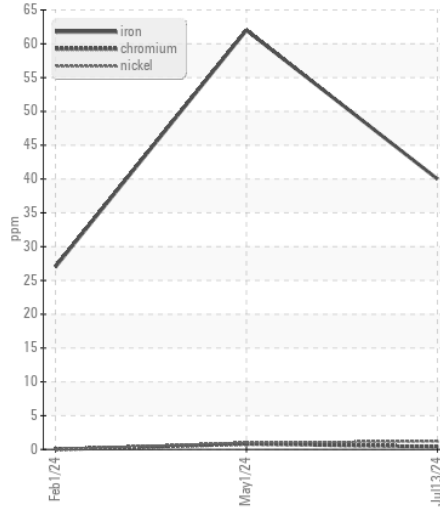


**Base Number**

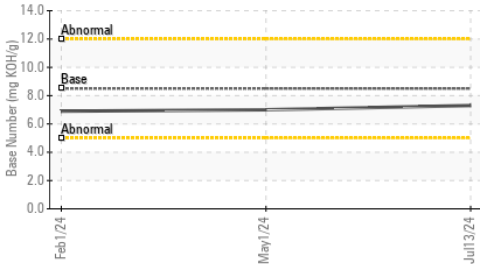


**Non-ferrous Metals**

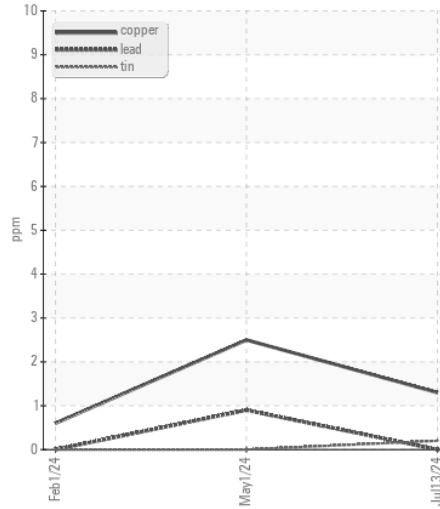


**Viscosity @ 100°C**

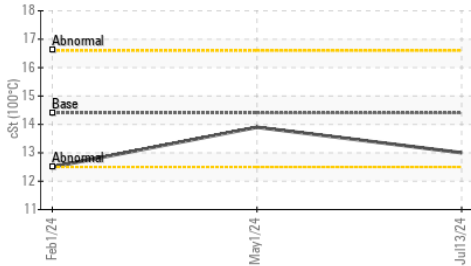

**Viscosity @ 100°C**

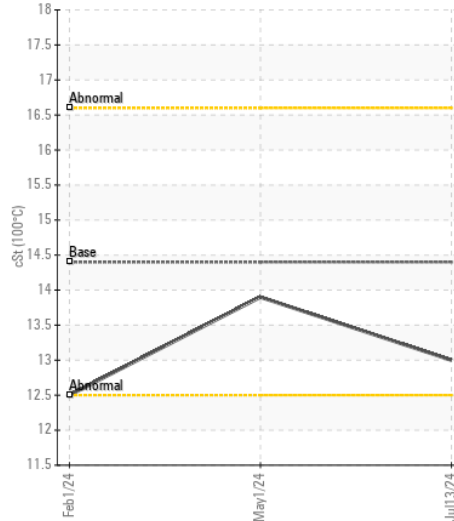

**Base Number**

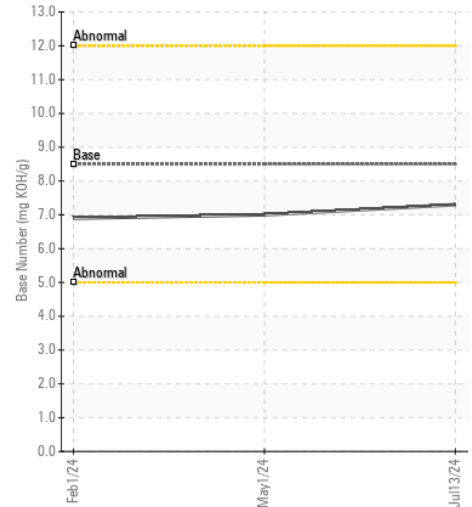

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0950488 **Received** : 18 Jul 2024  
**Lab Number** : 06239892 **Tested** : 18 Jul 2024  
**Unique Number** : 11128726 **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SULLIVAN EASTERN INC**  
 2860 C SLATER RD  
 MORRISVILLE, NC  
 US 27560

Contact: SCOTT SULLIVAN  
 ssullivan@sullivaneastern.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)484-8993  
 F: (919)484-2136