



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
12097
Component
Gasoline Engine
Fluid
CHEVRON SUPREME MOTOR OIL 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0950490	WC0913643	WC0846278
Sample Date		Client Info		15 Jul 2024	20 Mar 2024	14 Nov 2023
Machine Age	hrs	Client Info		2927	2689	2460
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	9	12	5
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		1	1	<1
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>40	4	4	2
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>155	8	8	10
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	28	▲ 32	29
Potassium	ppm	ASTM D5185m	>20	5	5	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	13.2	13.9	12.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.6	28.0	27.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	0	2	0
Boron	ppm	ASTM D5185m		32	25	14
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		7	11	22
Manganese	ppm	ASTM D5185m		8	6	5
Magnesium	ppm	ASTM D5185m		657	646	659
Calcium	ppm	ASTM D5185m		1302	1212	1194
Phosphorus	ppm	ASTM D5185m	780	675	626	676
Zinc	ppm	ASTM D5185m	860	817	774	798
Sulfur	ppm	ASTM D5185m		2717	2633	2583
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.0	25.8	23.9
Base Number (BN)	mg KOH/g	ASTM D2896	7.8	3.2	3.2	3.5
Visc @ 100°C	cSt	ASTM D445	9.7	12.1	11.9	11.4

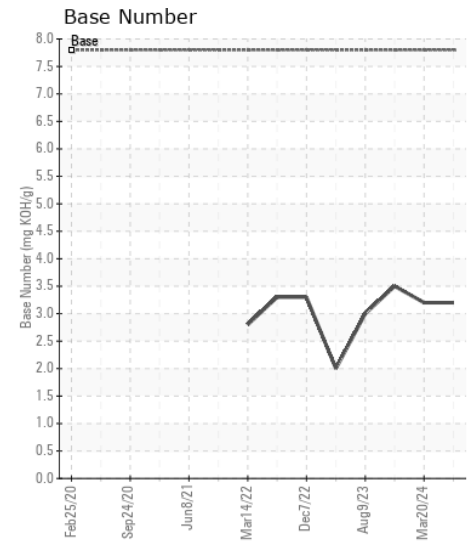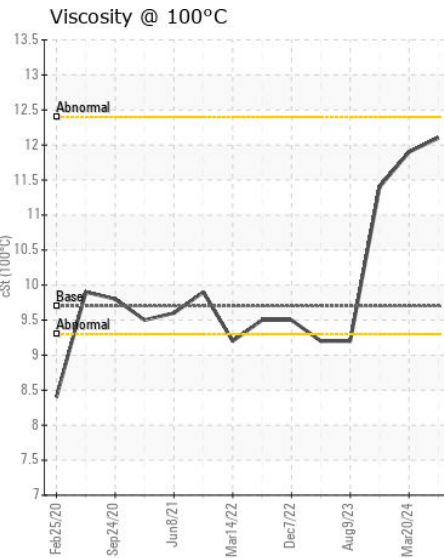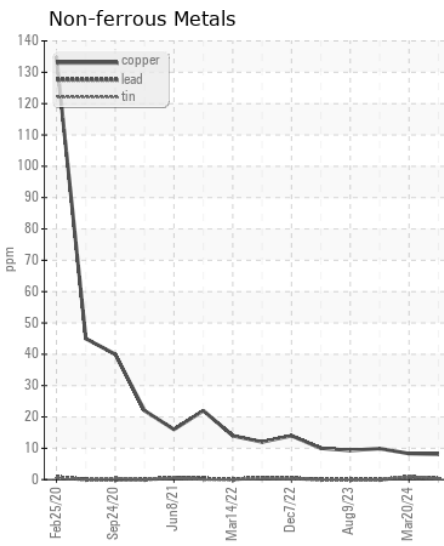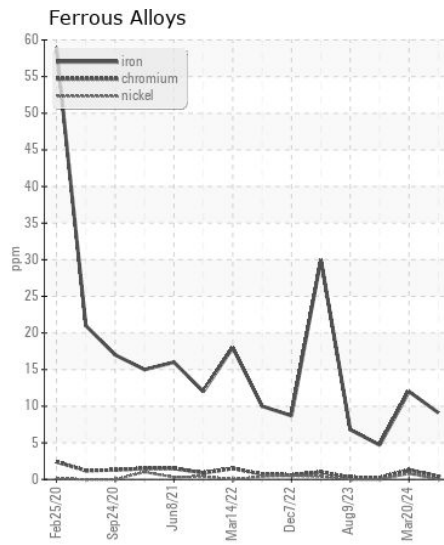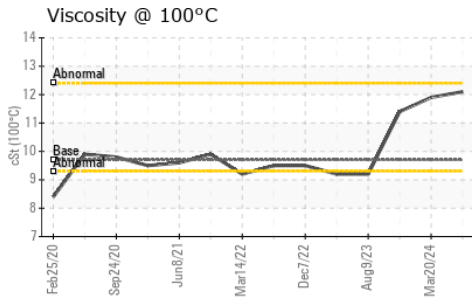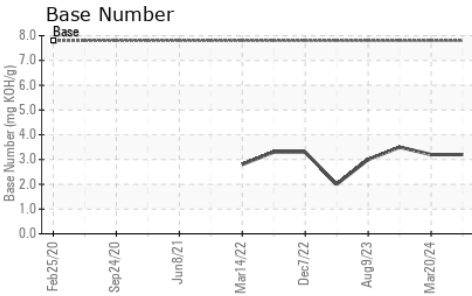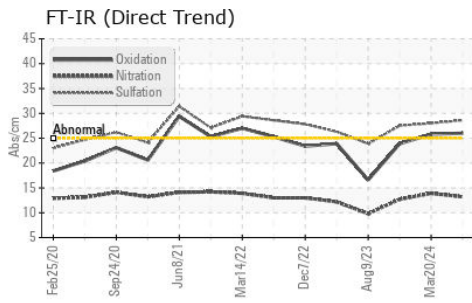

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0950490 **Received** : 18 Jul 2024
Lab Number : 06239897 **Tested** : 18 Jul 2024
Unique Number : 11128731 **Diagnosed** : 19 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivaneastern.com
 T: (919)484-8993
 F: (919)484-2136