



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH RRL-9
 Component
Diesel Engine
 Fluid
GIBRALTAR 15W/40 SUPER S-3 LX (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0941103	WC0875559	---
Sample Date		Client Info		26 Jun 2024	21 Mar 2024	---
Machine Age	hrs	Client Info		25023	24451	---
Oil Age	hrs	Client Info		600	0	---
Filter Age	hrs	Client Info		600	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	30	47	---
Chromium	ppm	ASTM D5185m	>20	1	2	---
Nickel	ppm	ASTM D5185m	>4	1	2	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	5	---
Lead	ppm	ASTM D5185m	>40	2	4	---
Copper	ppm	ASTM D5185m	>330	<1	3	---
Tin	ppm	ASTM D5185m	>15	0	2	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	7	---
Potassium	ppm	ASTM D5185m	>20	4	9	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.9	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	10.6	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	25.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	10	---
Boron	ppm	ASTM D5185m		12	11	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m	66	69	83	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	1000	856	891	---
Calcium	ppm	ASTM D5185m	1050	1298	1245	---
Phosphorus	ppm	ASTM D5185m	1150	1037	1024	---
Zinc	ppm	ASTM D5185m	1270	1185	1291	---
Sulfur	ppm	ASTM D5185m		3296	3414	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	24.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.9	7.0	---
Visc @ 100°C	cSt	ASTM D445	15.5	15.5	13.9	---

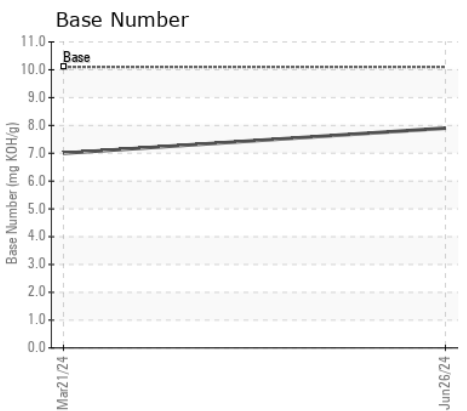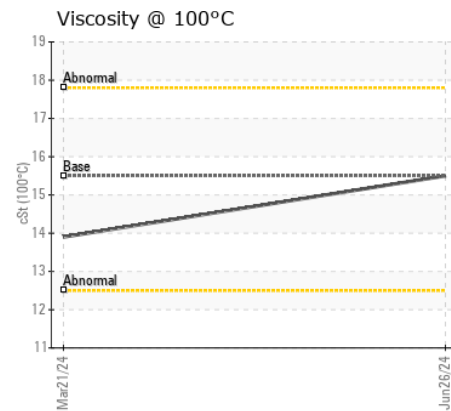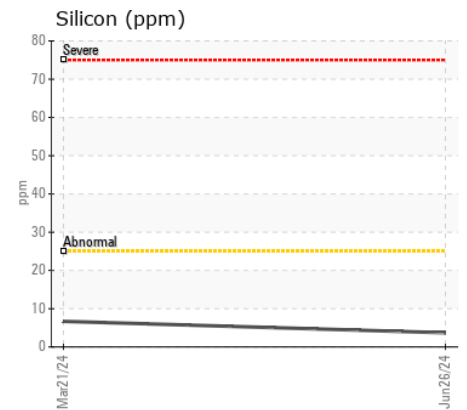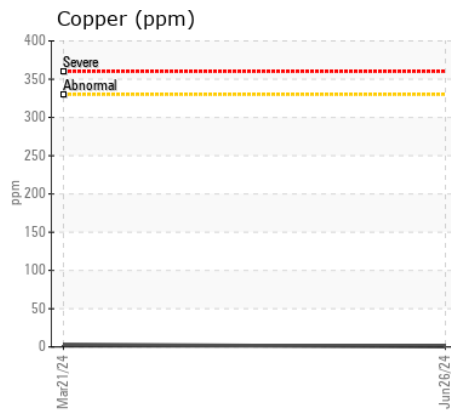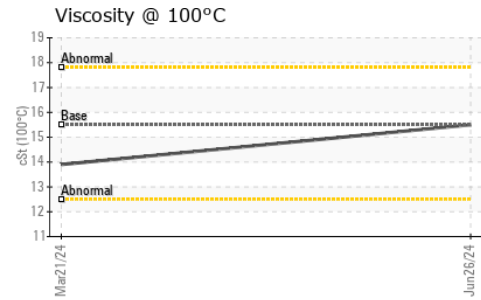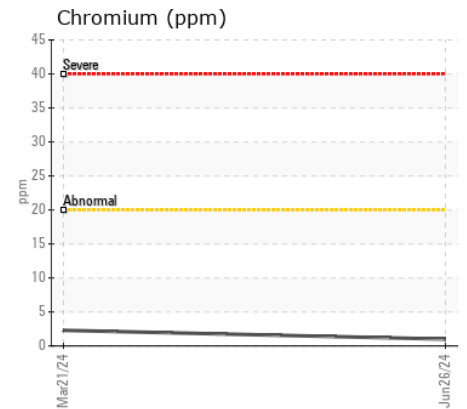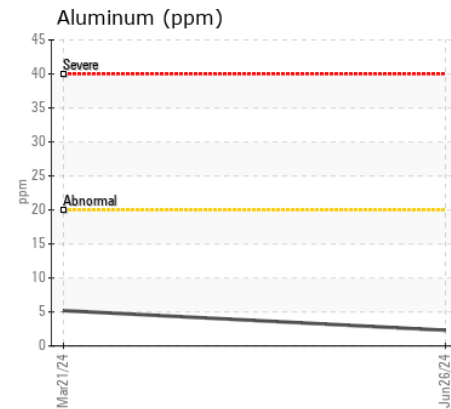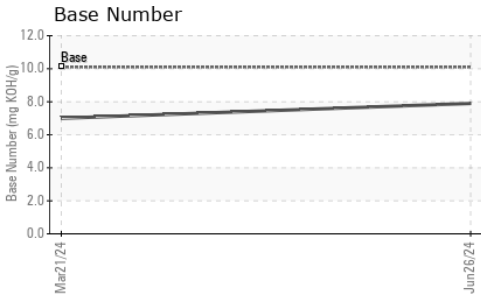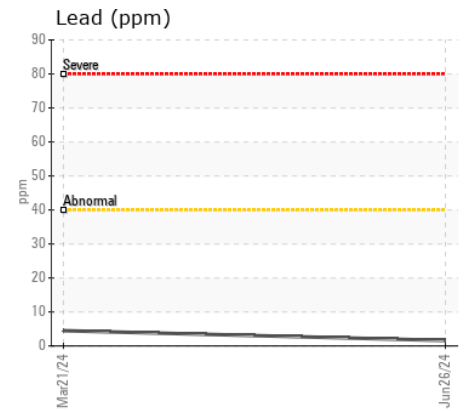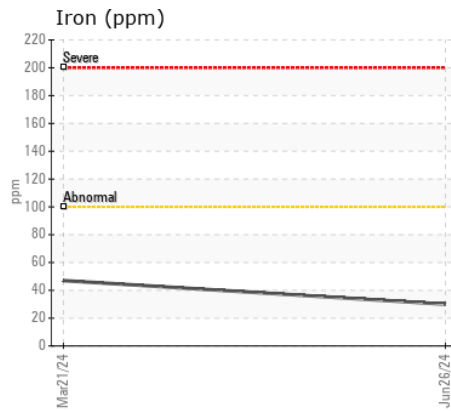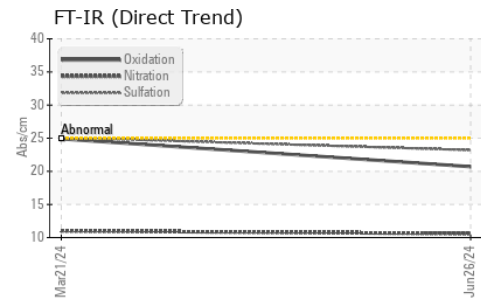

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0941103 **Received** : 18 Jul 2024
Lab Number : 06239949 **Tested** : 18 Jul 2024
Unique Number : 11128783 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

OAKRIDGE WASTE
 307 WHITE ST
 DANBURY, CT
 US 06810

Contact: CHRIS CONTI
 chris.conti@oakridgewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: