



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

NADINE URCIUOLI [AL MOORAD]

Machine Id

VOLVO PENTA A640664

Component

Port Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA052752	VPA031938	---
Sample Date		Client Info		09 Jul 2024	03 Nov 2020	---
Machine Age	hrs	Client Info		357	218	---
Oil Age	hrs	Client Info		357	94	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	11	21	---
Chromium	ppm	ASTM D5185m	>6	<1	1	---
Nickel	ppm	ASTM D5185m	>2	1	5	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	1	4	---
Lead	ppm	ASTM D5185m	>95	1	2	---
Copper	ppm	ASTM D5185m	>85	4	18	---
Tin	ppm	ASTM D5185m	>9	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	7	---
Potassium	ppm	ASTM D5185m	>20	2	4	---
Fuel		WC Method	>4.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.1	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	19.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	4	---
Boron	ppm	ASTM D5185m	2.5	0	5	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.7	58	55	---
Manganese	ppm	ASTM D5185m	0.0	<1	<1	---
Magnesium	ppm	ASTM D5185m	256	931	949	---
Calcium	ppm	ASTM D5185m	2057	1059	1213	---
Phosphorus	ppm	ASTM D5185m	935	1018	992	---
Zinc	ppm	ASTM D5185m	1223	1161	1063	---
Sulfur	ppm	ASTM D5185m	4079	3416	2616	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	15.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	13.4	15.2	---

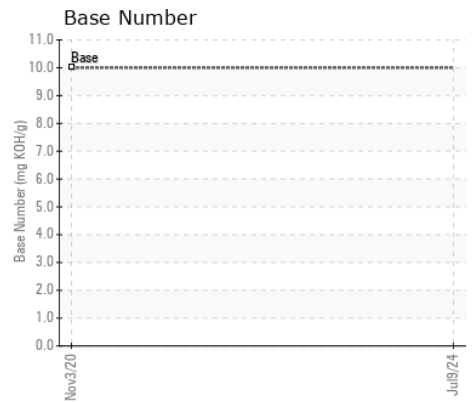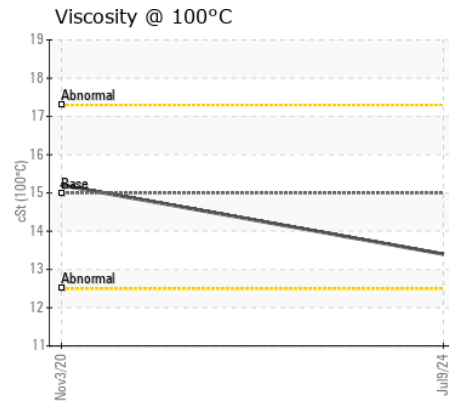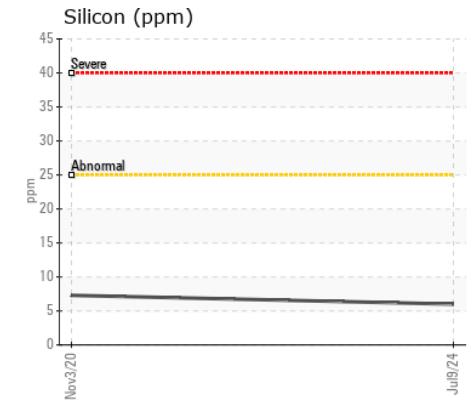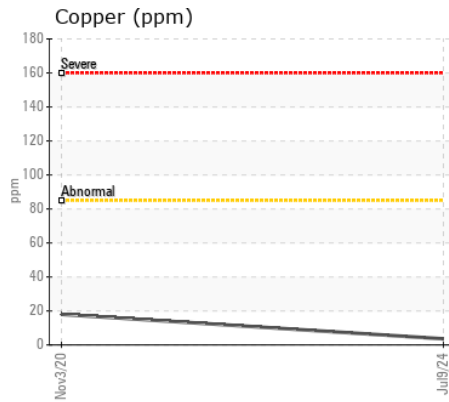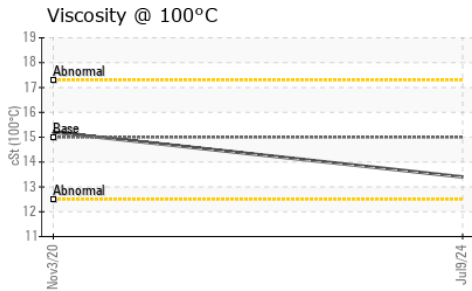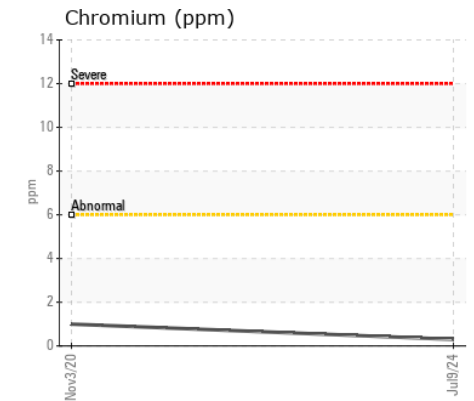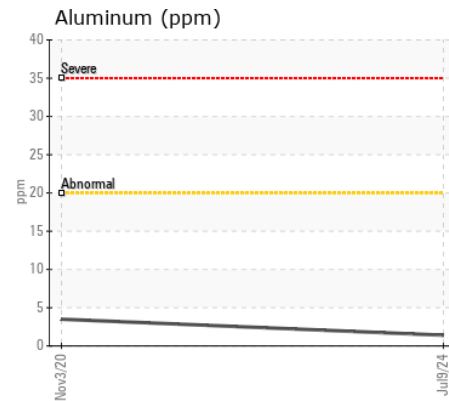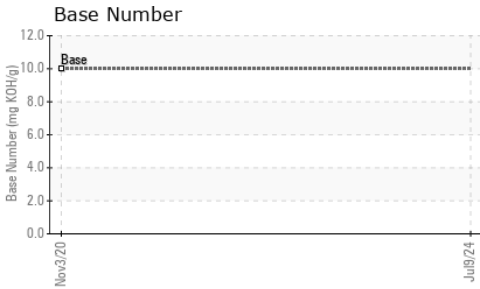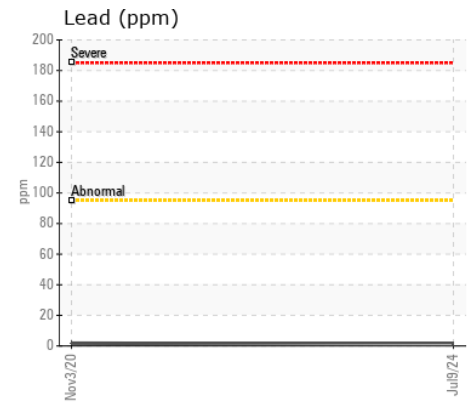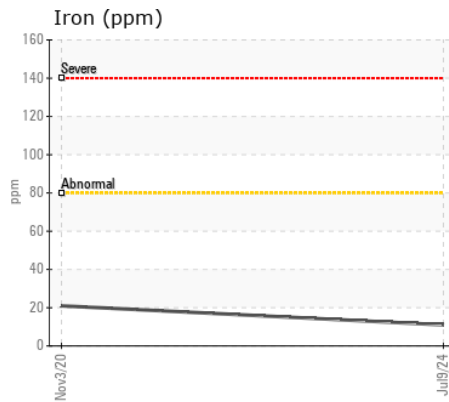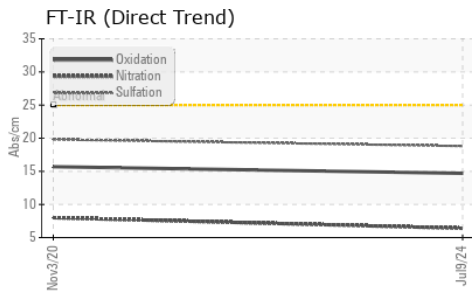

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA052752 **Received** : 18 Jul 2024  
**Lab Number** : 06239958 **Tested** : 18 Jul 2024  
**Unique Number** : 11128792 **Diagnosed** : 19 Jul 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Helmuts Marine Service**  
 619 Canal Street  
 SAN RAFAEL, CA  
 US 94901-3545

Contact: NADINE URUIOLI  
 SERVICE@HELMUTSMARINE.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: x: