



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SPM731355]

Machine Id

SENNEBOGEN 835ME 835.0.2266

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP435706	VCP422975	VCP422527
Sample Date		Client Info		08 Jul 2024	11 Aug 2023	09 May 2023
Machine Age	hrs	Client Info		21313	19533	19009
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	10	13	12
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	<1
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	<1	3	2
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	4	4
Potassium	ppm	ASTM D5185m	>20	4	<1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.4	12.4	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	24.8	20.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	3	2
Boron	ppm	ASTM D5185m	250	19	22	26
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	45	47	45
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	904	1001	962
Calcium	ppm	ASTM D5185m	3000	1196	1288	1247
Phosphorus	ppm	ASTM D5185m	1150	926	915	961
Zinc	ppm	ASTM D5185m	1350	1045	1196	1209
Sulfur	ppm	ASTM D5185m	4250	3139	3582	3456
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.9	23.5	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.0	6.2	8.3
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.2	12.8

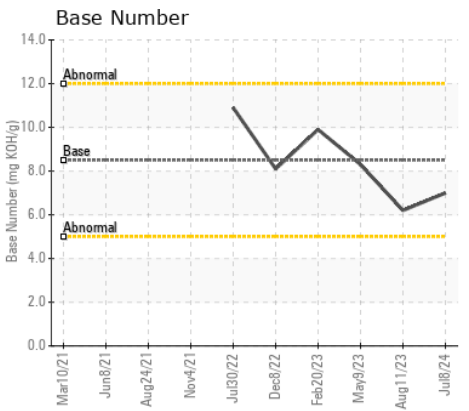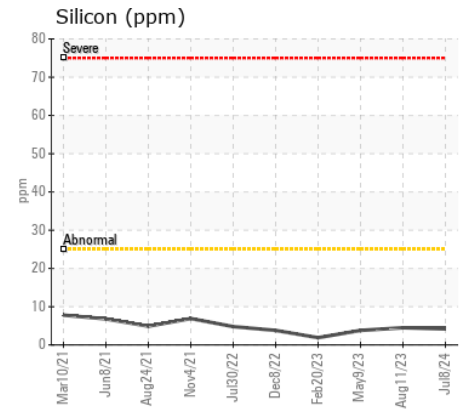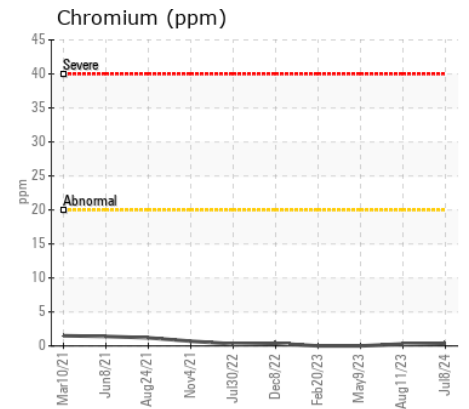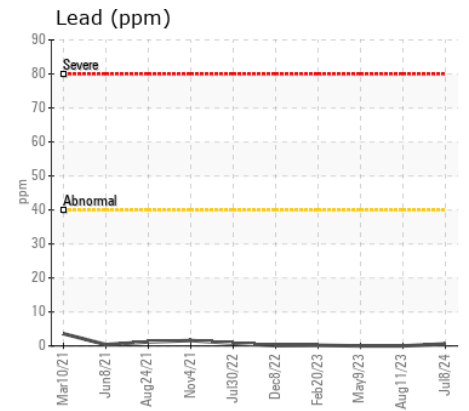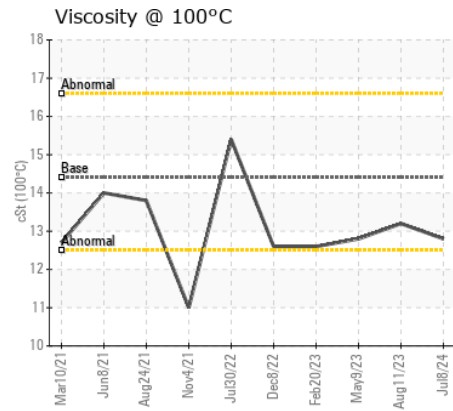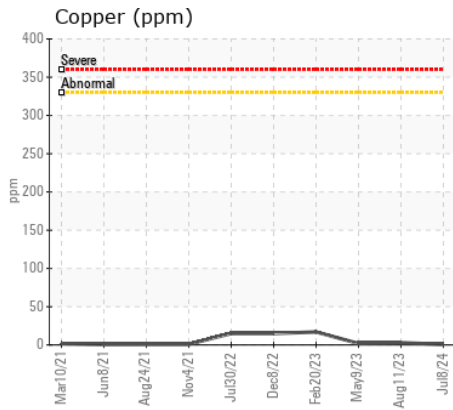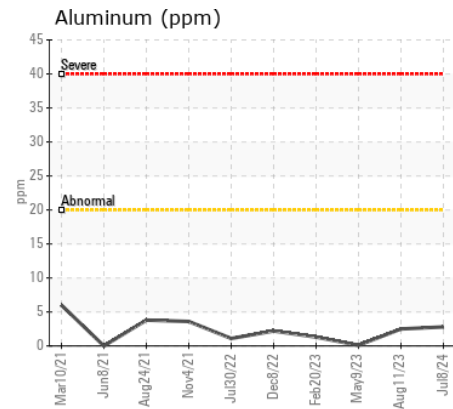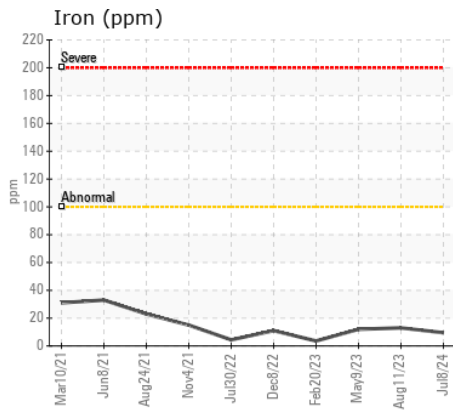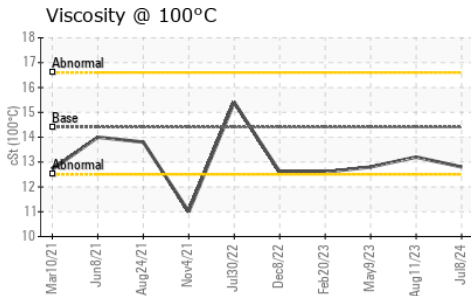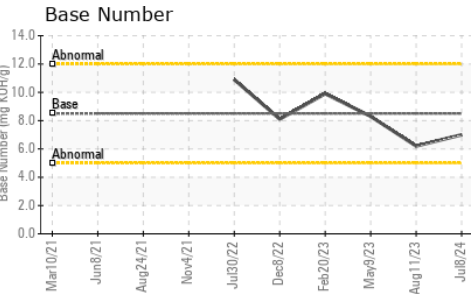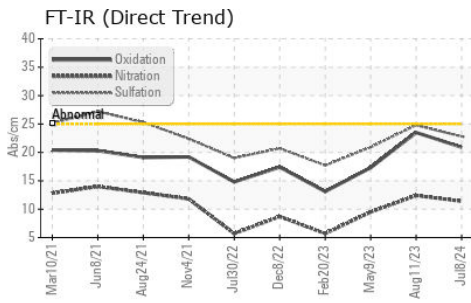

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP435706 **Received** : 18 Jul 2024
Lab Number : 06239968 **Tested** : 18 Jul 2024
Unique Number : 11128802 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

SIMS METAL MANAGEMENT
 2500 S. PAULINA
 CHICAGO, IL
 US 60608
 Contact: RYAN WISE
 ryan.wise@simsmm.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)