



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**NADINE URCIUOLI [STEVE DOSSEY]**  
 Machine Id  
**VOLVO PENTA 4012101710**  
 Component  
**Center Gasoline Engine**  
 Fluid  
**VOLVO 10W40 (6 QTS)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA062266	---	---
Sample Date		Client Info		12 Jul 2024	---	---
Machine Age	hrs	Client Info		52	---	---
Oil Age	hrs	Client Info		52	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	16	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>155	3	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	19	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		30	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		31	---	---
Calcium	ppm	ASTM D5185m		1969	---	---
Phosphorus	ppm	ASTM D5185m		738	---	---
Zinc	ppm	ASTM D5185m		870	---	---
Sulfur	ppm	ASTM D5185m		3072	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.6	---	---
Visc @ 100°C	cSt	ASTM D445		12.7	---	---

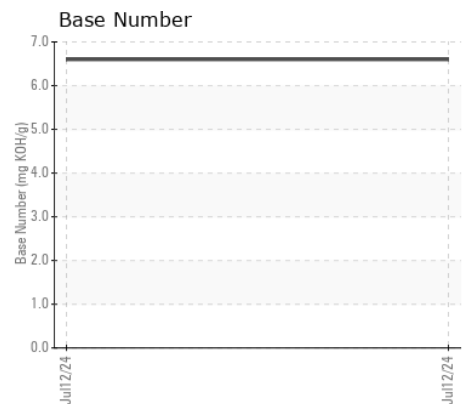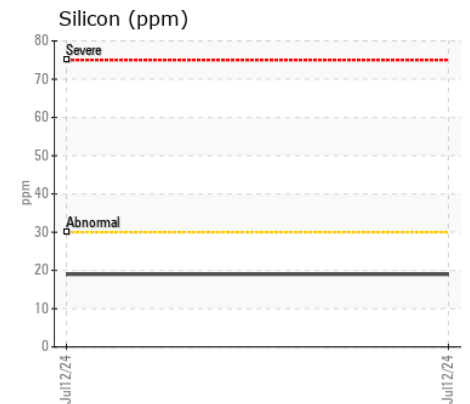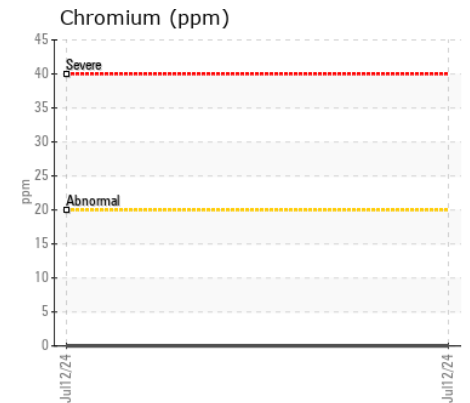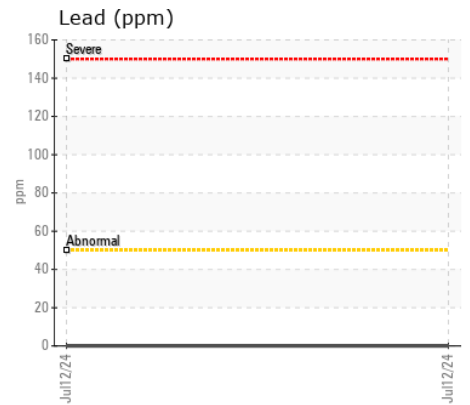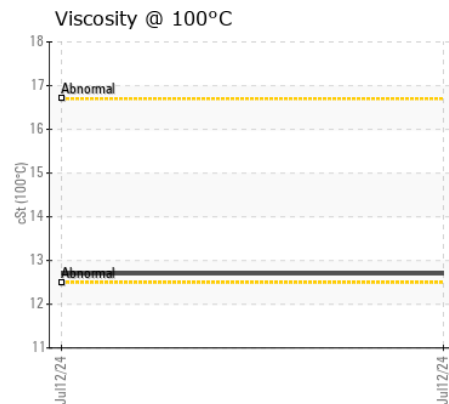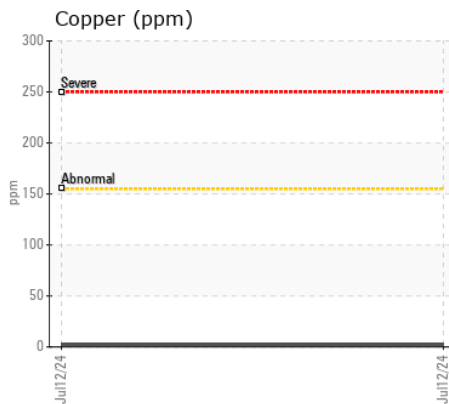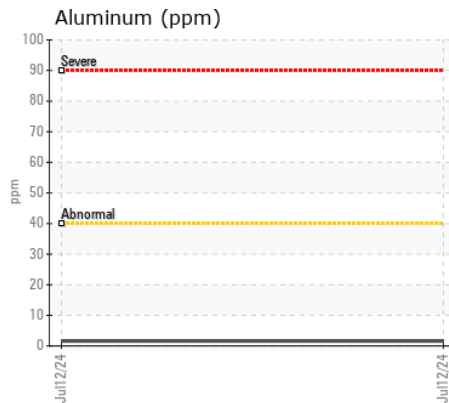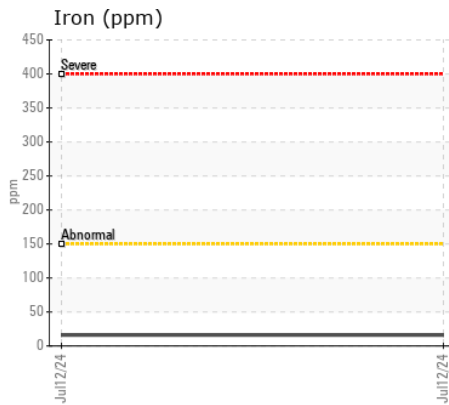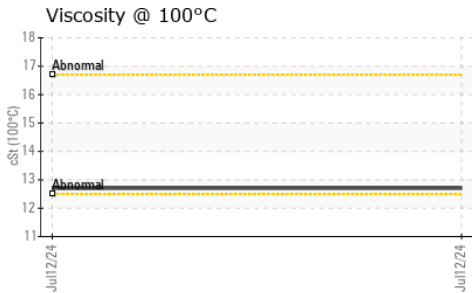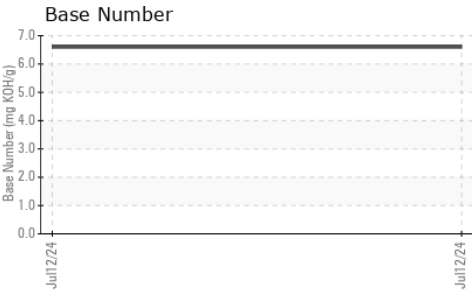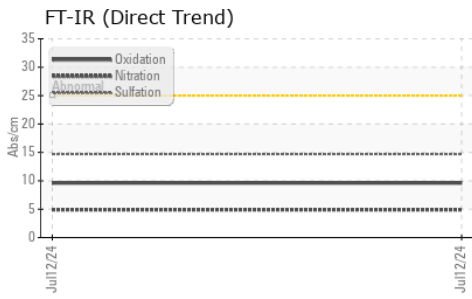

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA062266 **Received** : 18 Jul 2024  
**Lab Number** : 06240024 **Tested** : 18 Jul 2024  
**Unique Number** : 11128858 **Diagnosed** : 19 Jul 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Helmuts Marine Service**  
 619 Canal Street  
 SAN RAFAEL, CA  
 US 94901-3545

Contact: NADINE URUIOLI  
 SERVICE@HELMUTSMARINE.COM

T: x:  
 F: x: