



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**NOT GIVEN WC0952715**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.  
 Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0952715</b>	---	---
Sample Date		Client Info		<b>17 Jul 2024</b>	---	---
Machine Age	mls	Client Info		<b>0</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	<b>25</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>32</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>309</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>3</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>75</b>	---	---
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>6	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>2</b>	---	---
Boron	ppm	ASTM D5185m	250	<b>264</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	100	<b>81</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	450	<b>481</b>	---	---
Calcium	ppm	ASTM D5185m	3000	<b>1462</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1079</b>	---	---
Zinc	ppm	ASTM D5185m	1350	<b>1290</b>	---	---
Sulfur	ppm	ASTM D5185m	4250	<b>3507</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.6</b>	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.7</b>	---	---

FT-IR (Direct Trend)

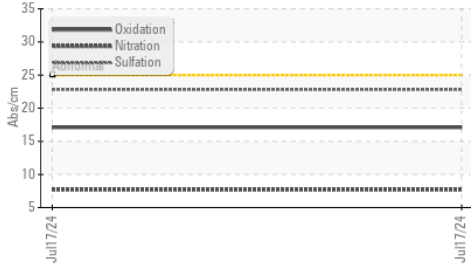


Base Number

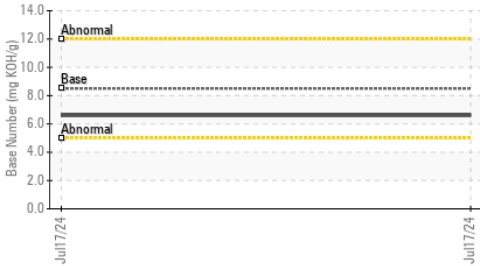


Viscosity @ 100°C




Aluminum (ppm)

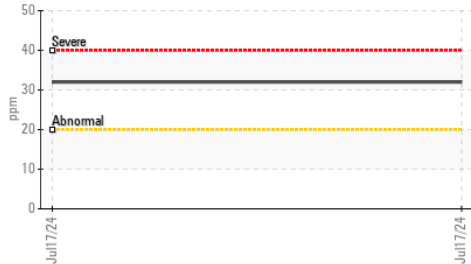


Ferrous Alloys

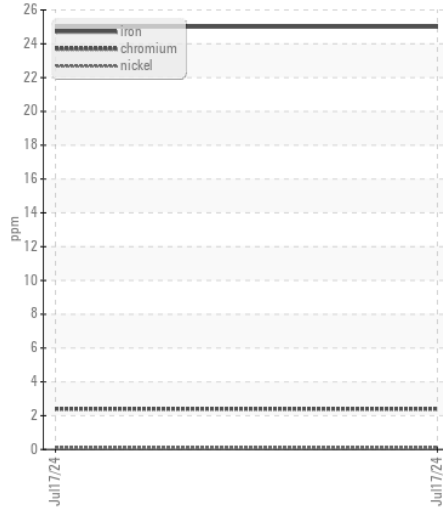


Non-ferrous Metals

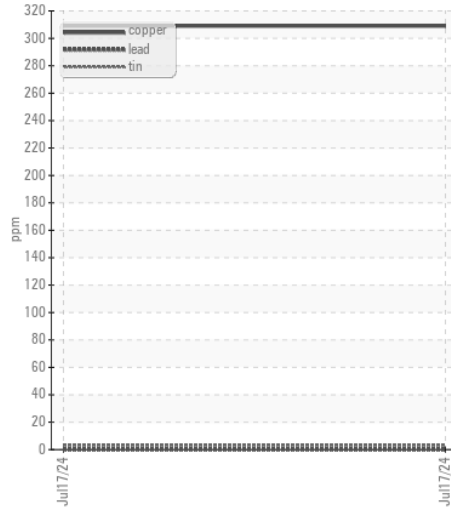

Viscosity @ 100°C

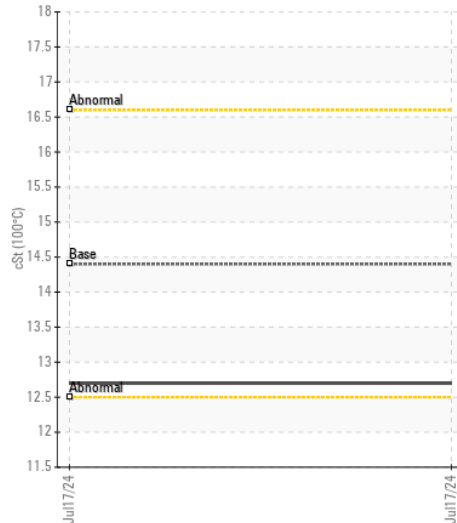

Base Number

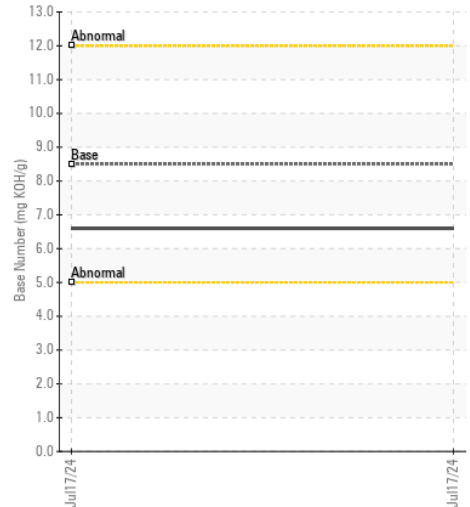

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0952715  
 Lab Number : 06240062  
 Unique Number : 11128896  
 Test Package : FLEET

Received : 18 Jul 2024  
 Tested : 19 Jul 2024  
 Diagnosed : 19 Jul 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: