



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
FLEET
Machine Id

Perdue (S/N NR603206)

Component
Center Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.
Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0123597	PCA0095827	---
Sample Date		Client Info		08 Jul 2024	16 May 2023	---
Machine Age	mls	Client Info		0	0	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	22	76	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	1	▲ 8	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	<1	1	---
Aluminum	ppm	ASTM D5185m	>20	4	● 28	---
Lead	ppm	ASTM D5185m	>40	<1	2	---
Copper	ppm	ASTM D5185m	>330	31	201	---
Tin	ppm	ASTM D5185m	>15	0	6	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	▲ 47	---
Potassium	ppm	ASTM D5185m	>20	7	77	---
Fuel	%	ASTM D3524	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	10.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	23.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	2	6	---
Boron	ppm	ASTM D5185m	250	<1	277	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	62	104	---
Manganese	ppm	ASTM D5185m		<1	7	---
Magnesium	ppm	ASTM D5185m	450	918	691	---
Calcium	ppm	ASTM D5185m	3000	1203	1503	---
Phosphorus	ppm	ASTM D5185m	1150	896	714	---
Zinc	ppm	ASTM D5185m	1350	1189	851	---
Sulfur	ppm	ASTM D5185m	4250	2975	2866	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.5	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	8.3	---
Visc @ 100°C	cSt	ASTM D445	10.9	11.1	9.6	---

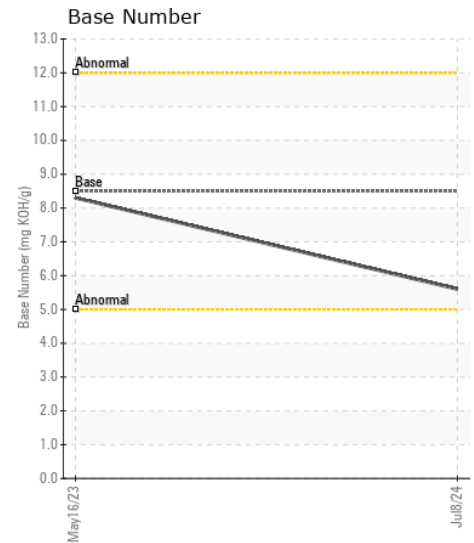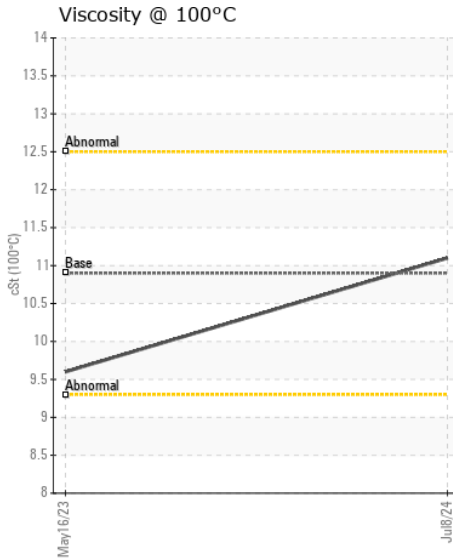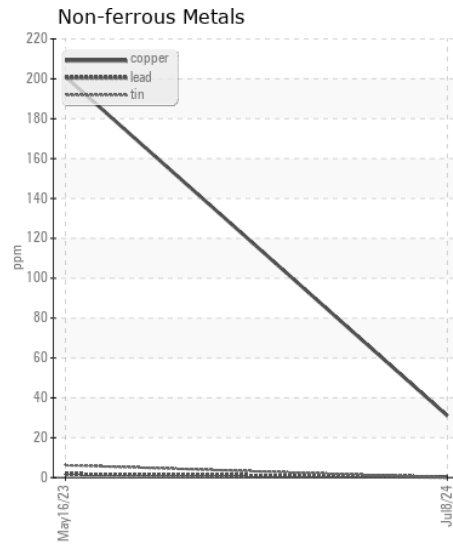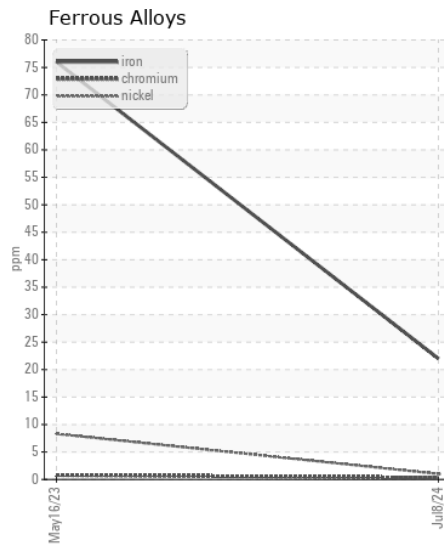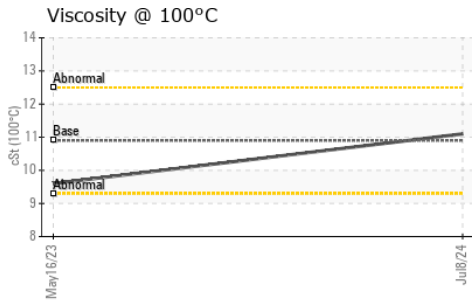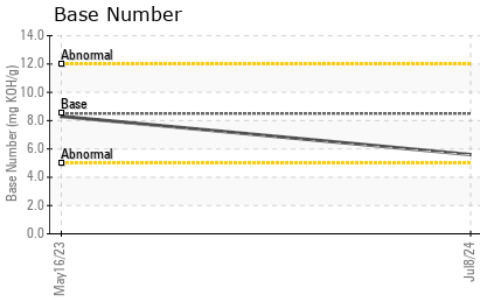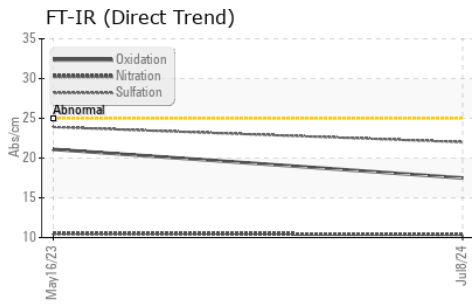

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123597 **Received** : 18 Jul 2024
Lab Number : 06240127 **Tested** : 19 Jul 2024
Unique Number : 11128961 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution)

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)