



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**4019**  
Component  
**Diesel Engine**  
Fluid  
**SHELL ROTELLA T 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0210612</b>	JR0210639	JR0184642
Sample Date		Client Info		<b>24 Jun 2024</b>	24 Apr 2024	02 Jan 2024
Machine Age	hrs	Client Info		<b>11869</b>	11544	11259
Oil Age	hrs	Client Info		<b>1000</b>	500	500
Filter Age	hrs	Client Info		<b>1000</b>	500	500
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>11</b>	6	19
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>4</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.4	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	7.1	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	17.7	19.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	0	<1
Boron	ppm	ASTM D5185m	316	<b>2</b>	1	3
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.2	<b>3</b>	3	2
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	24	<b>59</b>	58	53
Calcium	ppm	ASTM D5185m	2292	<b>2504</b>	2554	2320
Phosphorus	ppm	ASTM D5185m	1064	<b>958</b>	986	891
Zinc	ppm	ASTM D5185m	1160	<b>1116</b>	1194	1086
Sulfur	ppm	ASTM D5185m	4996	<b>4463</b>	4671	3607
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.6</b>	12.5	11.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>6.8</b>	6.5	6.7
Visc @ 100°C	cSt	ASTM D445	15.7	<b>13.2</b>	13.3	13.4

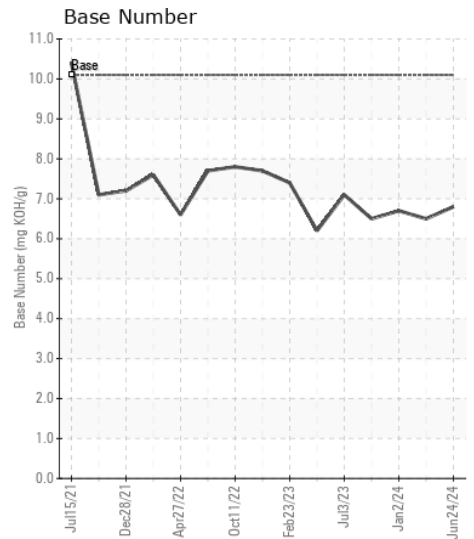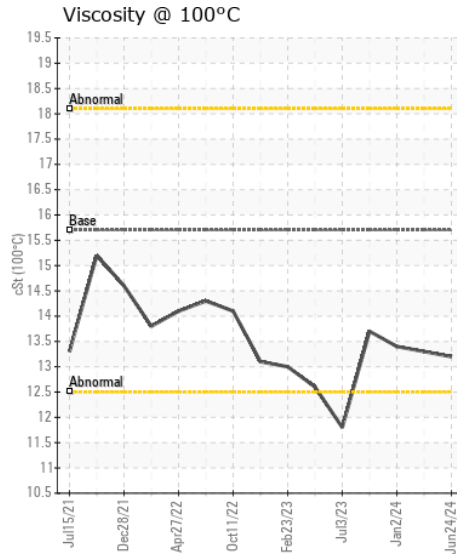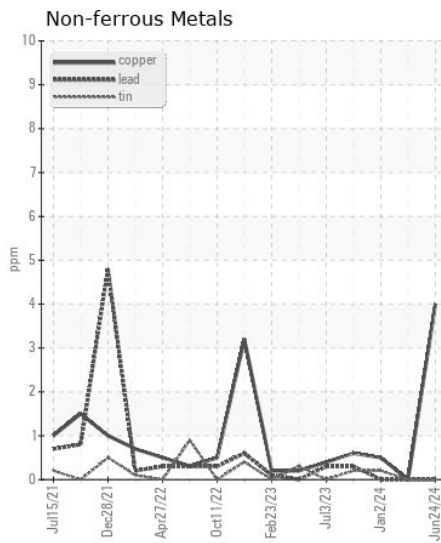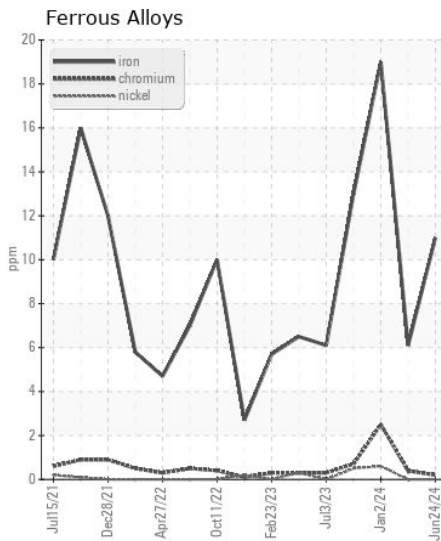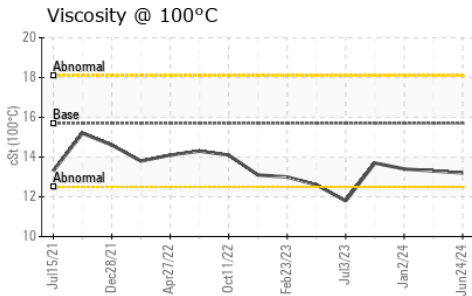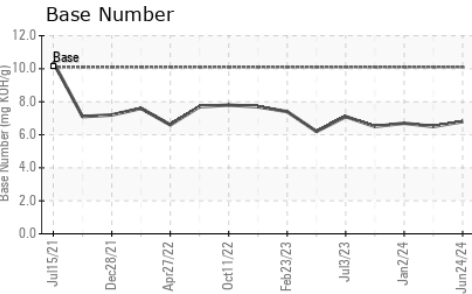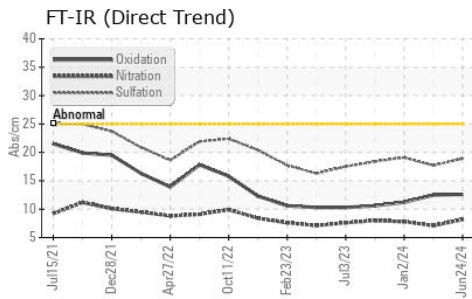

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0210612 **Received** : 18 Jul 2024  
**Lab Number** : 06240135 **Tested** : 19 Jul 2024  
**Unique Number** : 11128969 **Diagnosed** : 19 Jul 2024 - Don Baldridge  
**Test Package** : CONST ( Additional Tests: TBN )

**PATRIOT DEVELOPMENT CORP**  
 27271 LADBROOK DRIVE STE 120  
 STERLING, VA  
 US 20166  
 Contact: ROBERT MOSS  
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: