



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

## Mobile Fleet

Machine Id

### 8041 8041

Component

## Diesel Engine

Fluid

### DIESEL ENGINE OIL SAE 10W30 (--- GAL)

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0956065</b>	WC0947771	WC0919091
Sample Date		Client Info		<b>16 Jul 2024</b>	12 Jun 2024	17 Apr 2024
Machine Age	hrs	Client Info		<b>4739</b>	4502	4131
Oil Age	hrs	Client Info		<b>255</b>	371	702
Filter Age	hrs	Client Info		<b>255</b>	371	702
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	11	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	7
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	8
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	8	13
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	7.6	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	22.0	22.1
Particles >4µm		ASTM D7647	>20000	<b>5028</b>	3810	2697
Particles >6µm		ASTM D7647	>5000	<b>2739</b>	2076	1469
Particles >14µm		ASTM D7647	>640	<b>466</b>	353	250
Particles >21µm		ASTM D7647	>160	<b>157</b>	119	84
Particles >38µm		ASTM D7647	>40	<b>24</b>	18	13
Particles >71µm		ASTM D7647	>10	<b>2</b>	2	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>20/19/16</b>	19/18/16	19/18/15
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	1	3
Boron	ppm	ASTM D5185m	250	<b>36</b>	31	32
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>64</b>	49	51
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>557</b>	491	531
Calcium	ppm	ASTM D5185m	3000	<b>1910</b>	1606	1660
Phosphorus	ppm	ASTM D5185m	1150	<b>835</b>	678	765
Zinc	ppm	ASTM D5185m	1350	<b>1003</b>	906	911
Sulfur	ppm	ASTM D5185m	4250	<b>3168</b>	2583	2677
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.7</b>	19.9	21.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.0</b>	8.9	8.3
Visc @ 100°C	cSt	ASTM D445	10.9	<b>11.2</b>	11.7	13.0

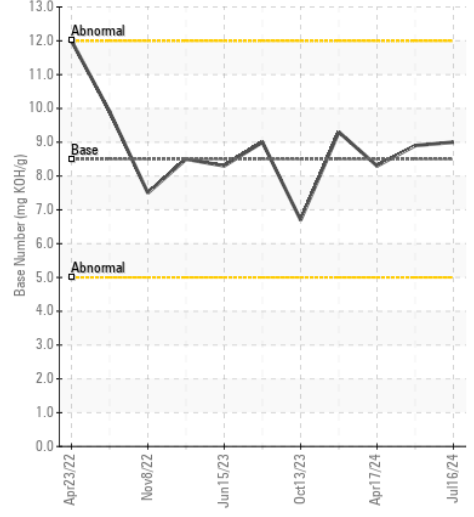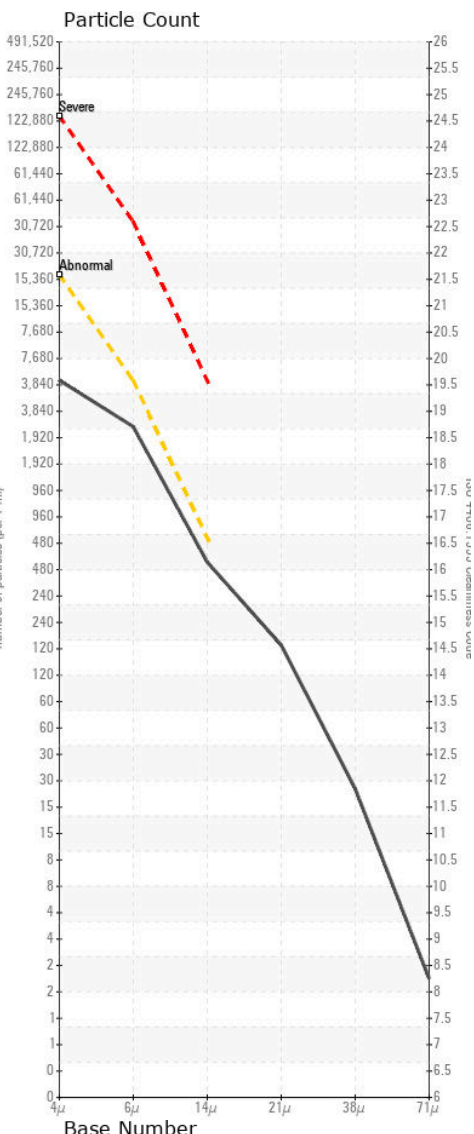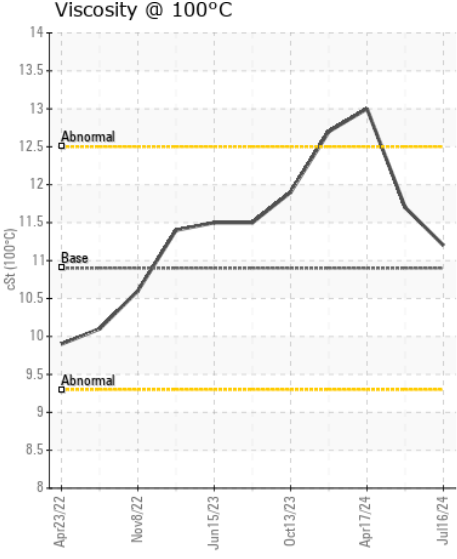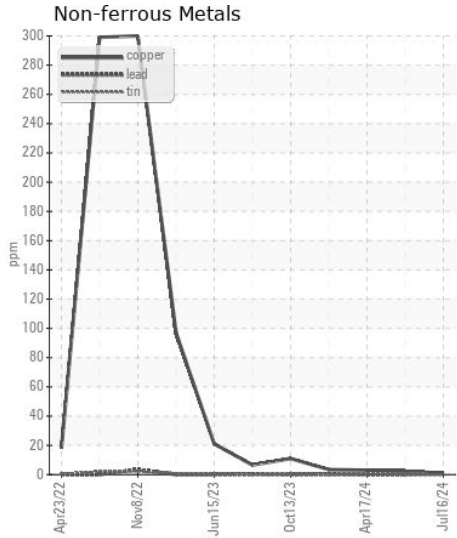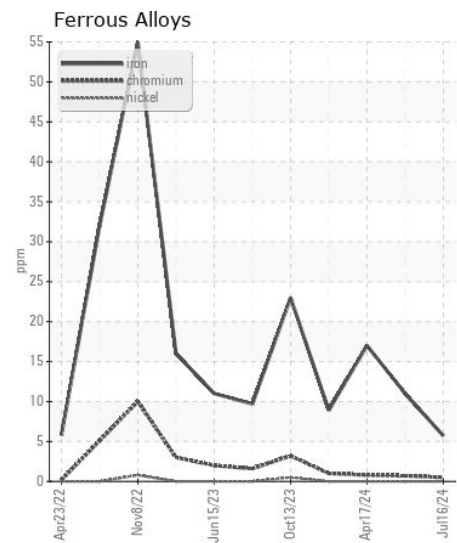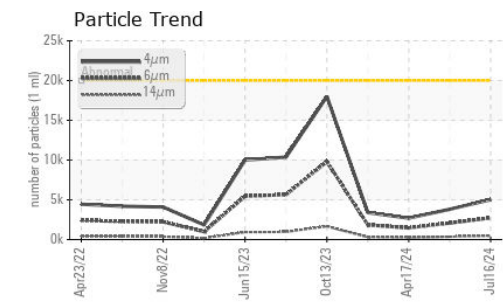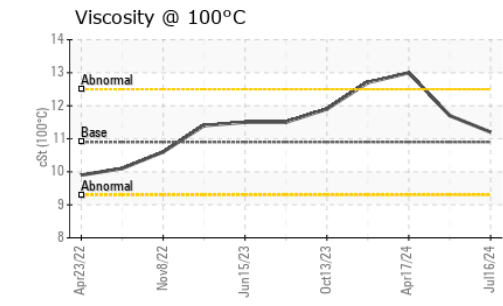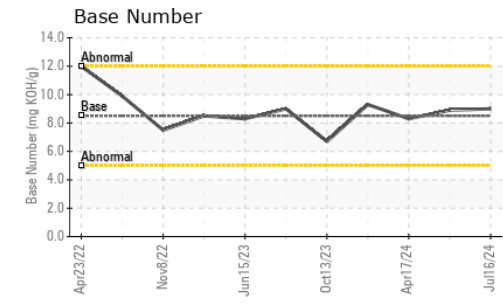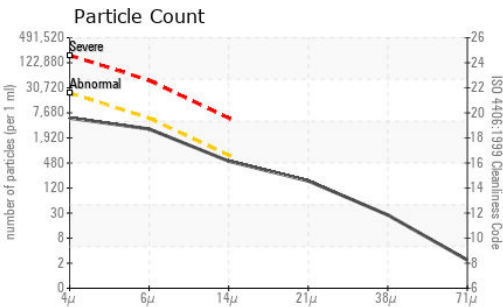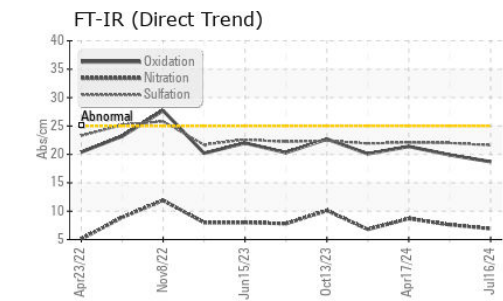

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0956065 **Received** : 18 Jul 2024  
**Lab Number** : 06240163 **Tested** : 19 Jul 2024  
**Unique Number** : 11128997 **Diagnosed** : 19 Jul 2024 - Don Baldridge  
**Test Package** : CONST ( Additional Tests: PrtCount, TBN )

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)