



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

Gastonia, NC #732

Machine Id

VOLVO L30GS L30GS3224600

Component

Hydraulic System

Fluid

VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008267	VCP0006432	---
Sample Date		Client Info		11 Jul 2024	04 Apr 2023	---
Machine Age	hrs	Client Info		4145	2292	---
Oil Age	hrs	Client Info		4145	2292	---
Filter Age	hrs	Client Info		0	2292	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	3	4	---
Chromium	ppm	ASTM D5185m	>20	3	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>20	4	2	---
Lead	ppm	ASTM D5185m	>20	1	0	---
Copper	ppm	ASTM D5185m	>150	3	4	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	3	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647		4764	7019	---
Particles >6µm		ASTM D7647	>2500	1098	1731	---
Particles >14µm		ASTM D7647	>80	66	131	---
Particles >21µm		ASTM D7647	>20	12	18	---
Particles >38µm		ASTM D7647	>4	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>-/18/13	19/17/13	20/18/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	---
Boron	ppm	ASTM D5185m	14	0	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	---
Manganese	ppm	ASTM D5185m	0.0	0	<1	---
Magnesium	ppm	ASTM D5185m	2.6	10	1	---
Calcium	ppm	ASTM D5185m	49	54	49	---
Phosphorus	ppm	ASTM D5185m	354	310	349	---
Zinc	ppm	ASTM D5185m	419	430	441	---
Sulfur	ppm	ASTM D5185m	3719	1520	1409	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.38	0.35	---
Visc @ 40°C	cSt	ASTM D445	46	39.1	40.4	---

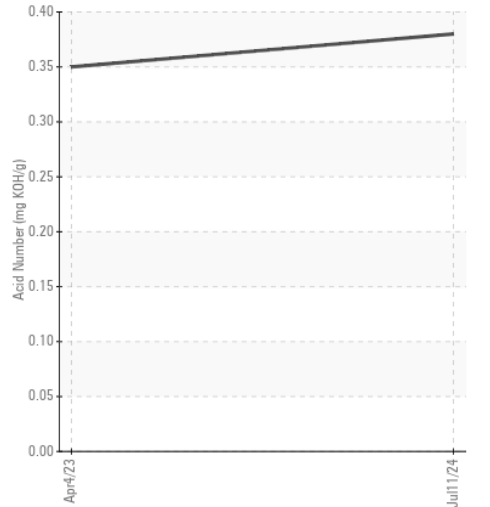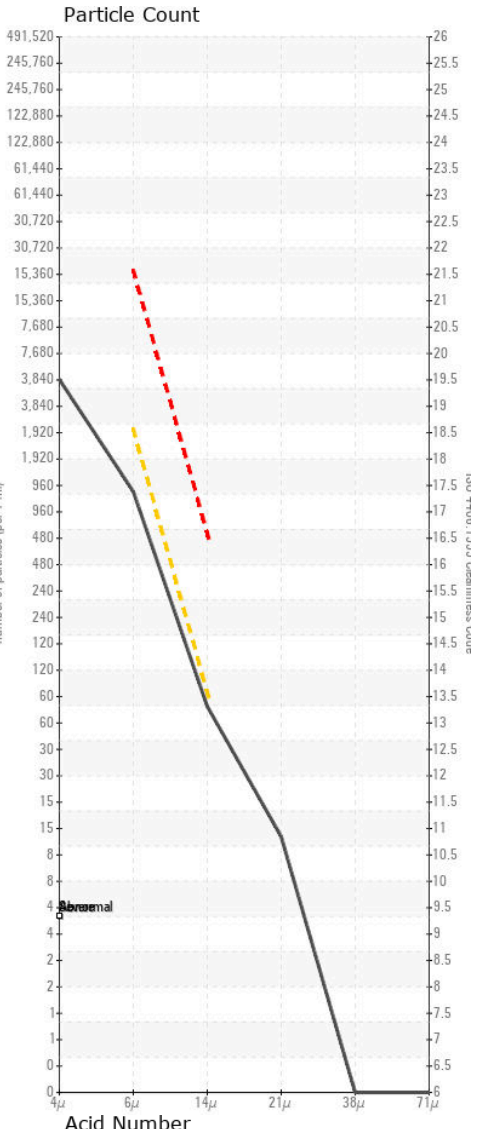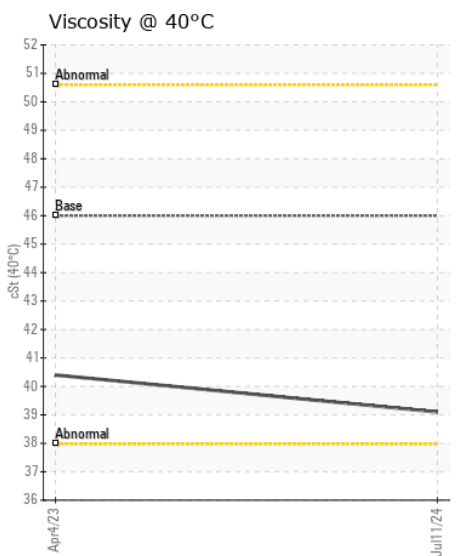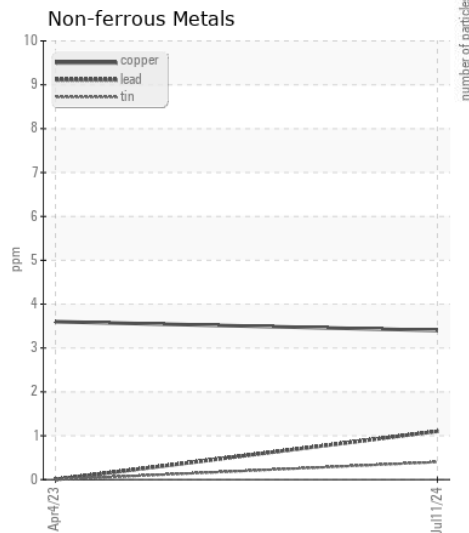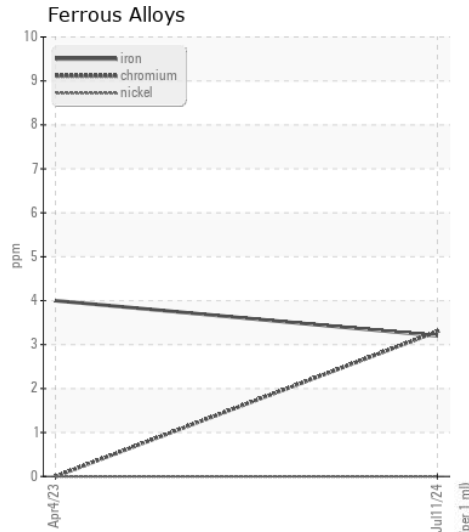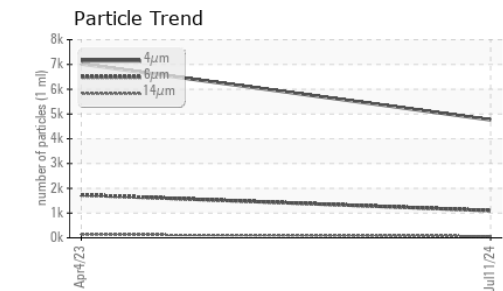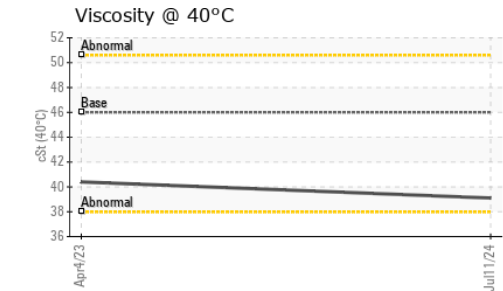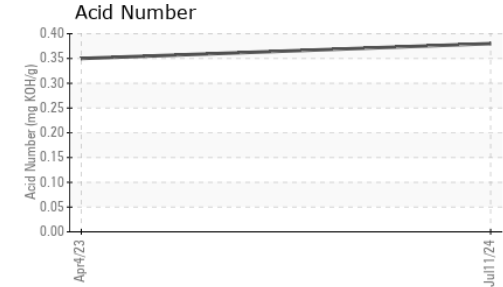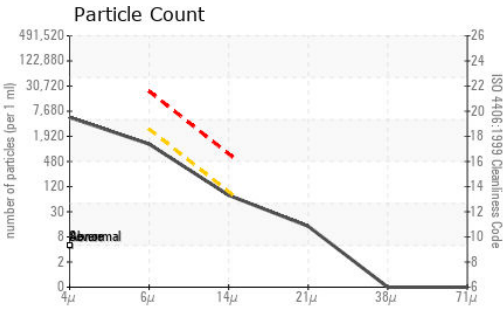

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0008267 **Received** : 18 Jul 2024
Lab Number : 06240231 **Tested** : 19 Jul 2024
Unique Number : 11129065 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : CONST

SITONE LANDSCAPE SUPPLY LLC
 300 COLONIAL CENTER PKWY, SUITE 600
 ROSWELL, GA
 US 30076
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: