



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CGL
Machine Id
CGL
Component
Hydraulic System
Fluid
CHEVRON HYDRAULIC AW ISO 68 (110 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0065531	MW0065497	MW0050816
Sample Date		Client Info		07 Jul 2024	18 Apr 2024	10 Jan 2024
Machine Age	hrs	Client Info		32064	2896	767
Oil Age	hrs	Client Info		5007	2896	767
Filter Age	hrs	Client Info		5007	2896	767
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	6	<1
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	4	2	2
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>20	2	<1	1
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	0	<1	0
Potassium	ppm	ASTM D5185m	>20	1	2	2
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647		5529	148742	9058
Particles >6µm		ASTM D7647	>1300	817	▲ 74578	● 1484
Particles >14µm		ASTM D7647	>160	24	▲ 743	40
Particles >21µm		ASTM D7647	>40	6	19	10
Particles >38µm		ASTM D7647	>10	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/17/14	20/17/12	▲ 24/23/17	● 20/18/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		36	39	52
Phosphorus	ppm	ASTM D5185m		305	317	359
Zinc	ppm	ASTM D5185m		422	398	525
Sulfur	ppm	ASTM D5185m		740	692	1007
Acid Number (AN)	mg KOH/g	ASTM D8045		0.41	0.37	0.06
Visc @ 40°C	cSt	ASTM D445	64.6	67.2	67.9	68.0

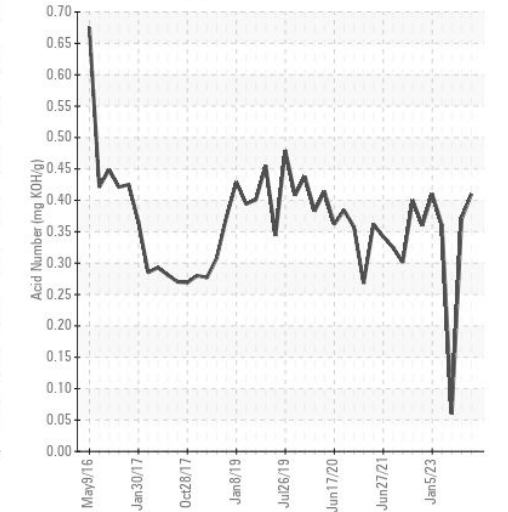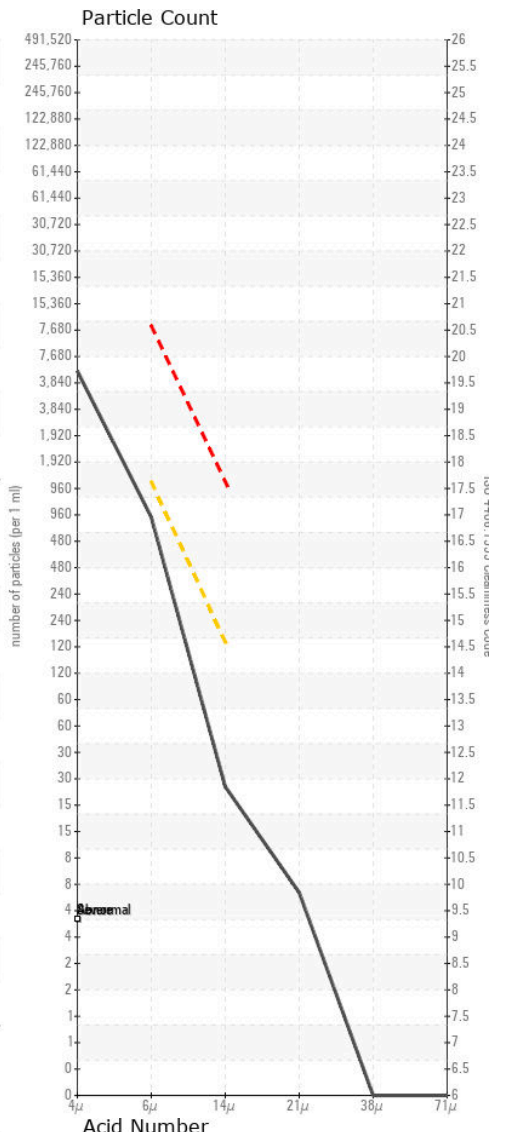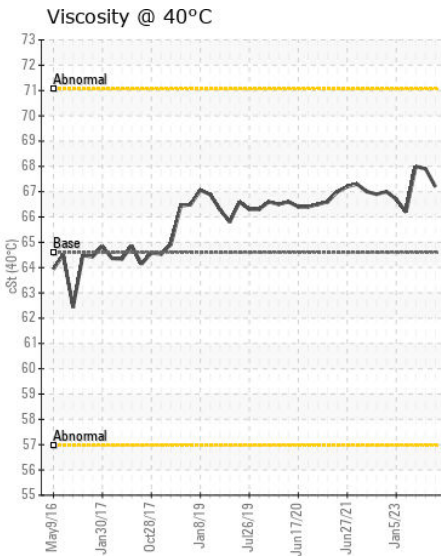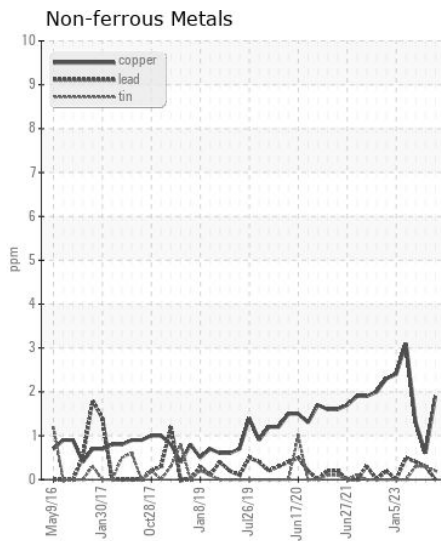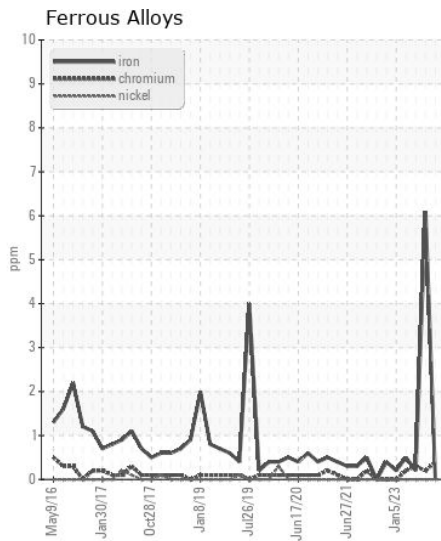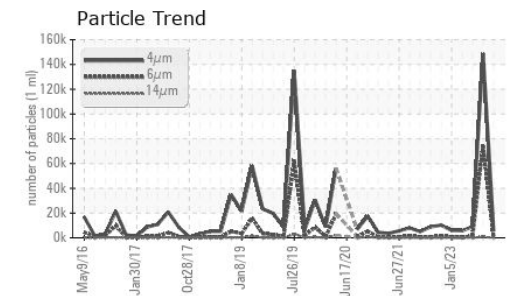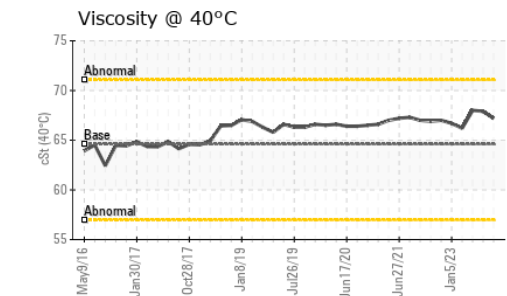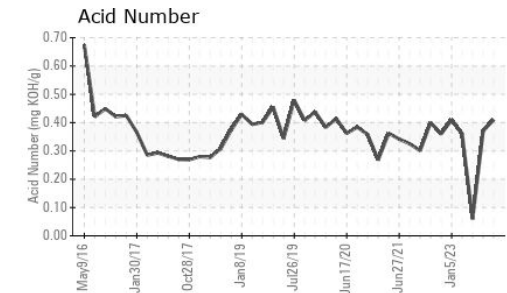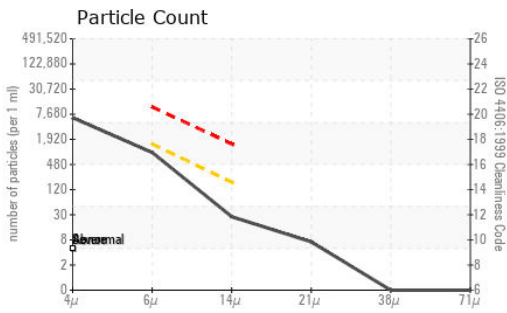

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0065531
Lab Number : 06240258
Unique Number : 11129092
Test Package : MAR 2

AMERICAN RIVER TRANSPORTATION CO.
P.O. BOX 2889
ST. LOUIS, MO
US 63111
Contact: JOSH BARRETT
joshua.barrett@adm.com
T:
F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)