



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
CAM
Machine Id
CAM
Component
Starboard Reduction Gear
Fluid
CHEVRON GEAR COMPOUND EP 320 (180 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0070293 | MW0070287 | MW0065413 |
| Sample Date | | Client Info | | 01 Jul 2024 | 25 Jun 2024 | 01 Apr 2024 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changed | N/A | Not Changed |
| Filter Changed | | Client Info | | Changed | N/A | Not Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >150 | 107 | 109 | 95 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | 1 | 2 |
| Lead | ppm | ASTM D5185m | >100 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >50 | 6 | 5 | 4 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | 3 | 3 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 3 | 2 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|-----|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 26 | 16 | 11 |
| Boron | ppm | ASTM D5185m | | 6 | 6 | 3 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 2 | 2 | 10 |
| Manganese | ppm | ASTM D5185m | | 1 | 2 | 1 |
| Magnesium | ppm | ASTM D5185m | | <1 | 1 | <1 |
| Calcium | ppm | ASTM D5185m | | 204 | 206 | 76 |
| Phosphorus | ppm | ASTM D5185m | | 197 | 227 | 218 |
| Zinc | ppm | ASTM D5185m | | 0 | 1 | 1 |
| Sulfur | ppm | ASTM D5185m | | 6863 | 8217 | 7494 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.36 | 0.33 | 0.48 |
| Visc @ 40°C | cSt | ASTM D445 | 304 | 375 | 356 | 329 |

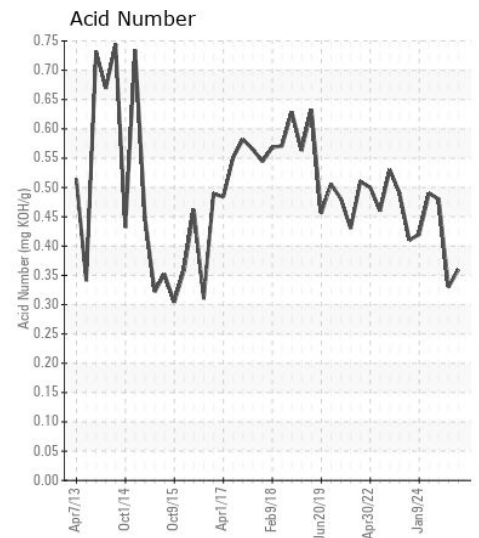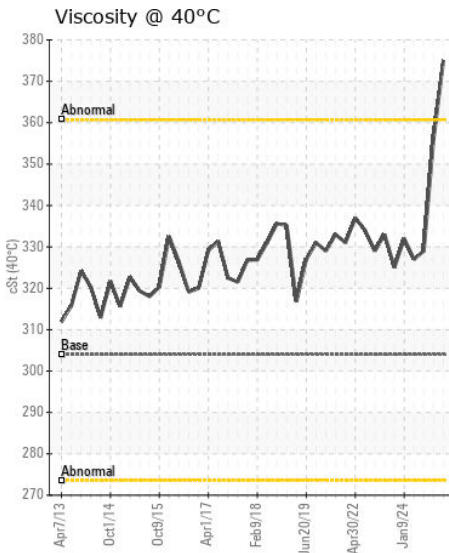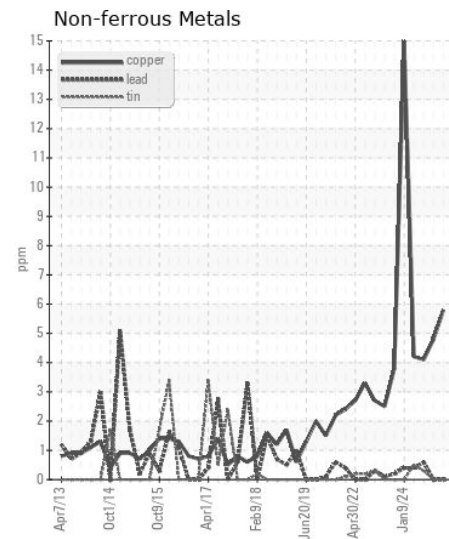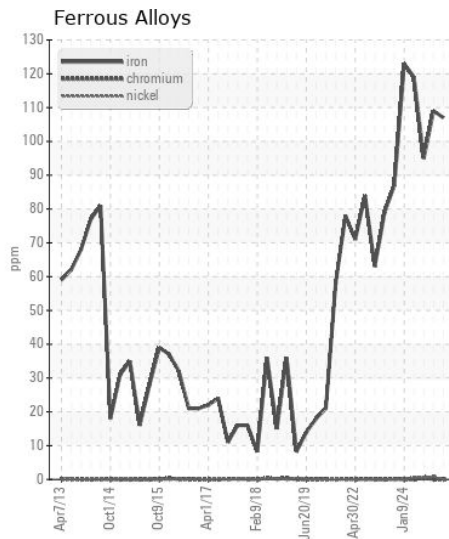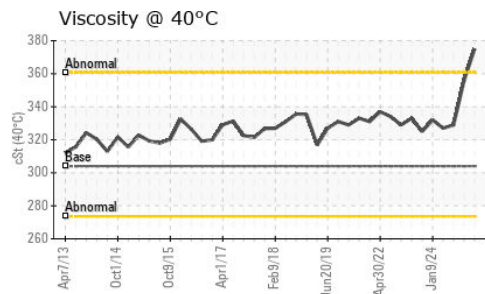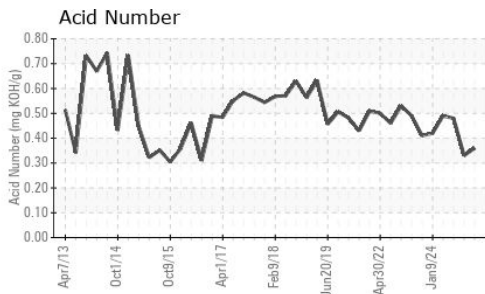

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0070293

Lab Number : 06240520

Unique Number : 11129354

Test Package : MAR 2

Received : 18 Jul 2024

Tested : 19 Jul 2024

Diagnosed : 20 Jul 2024 - Don Baldridge

AMERICAN RIVER TRANSPORTATION CO.

P.O. BOX 2889

ST. LOUIS, MO

US 63111

Contact: BRIAN GRIEWING

brian.griewing@adm.com

T:

F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)