



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
NDA
Machine Id
Component
NDA
Fluid
Starboard Reduction Gear
CHEVRON MEROPA 320 (275 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0060741	MW0070069	MW0060751
Sample Date		Client Info		10 Jul 2024	22 Apr 2024	22 Jan 2024
Machine Age	hrs	Client Info		0	21224	19014
Oil Age	hrs	Client Info		23524	21224	19014
Filter Age	hrs	Client Info		0	21224	19014
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		None	Not Changd	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	30	28	28
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	3	4
Lead	ppm	ASTM D5185m	>100	0	<1	2
Copper	ppm	ASTM D5185m	>50	4	4	4
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<1	<1	1
Potassium	ppm	ASTM D5185m	>20	1	4	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	2
Boron	ppm	ASTM D5185m	20	5	6	6
Barium	ppm	ASTM D5185m		8	9	7
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	6	3
Calcium	ppm	ASTM D5185m	25	5	5	7
Phosphorus	ppm	ASTM D5185m	235	233	236	261
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		6485	7827	6499
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.82	0.80	0.72
Visc @ 40°C	cSt	ASTM D445	304	329	330	330

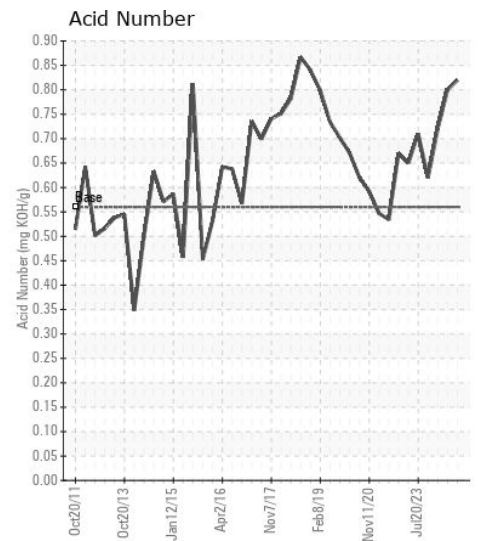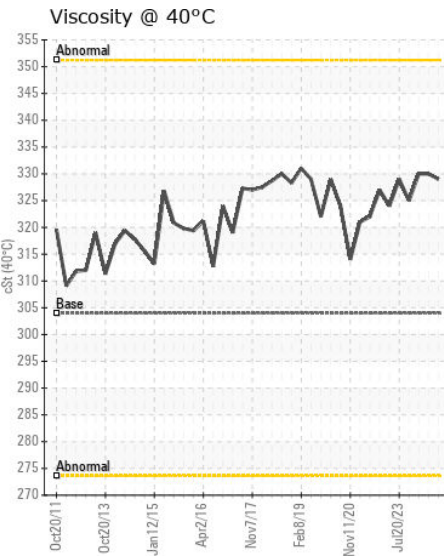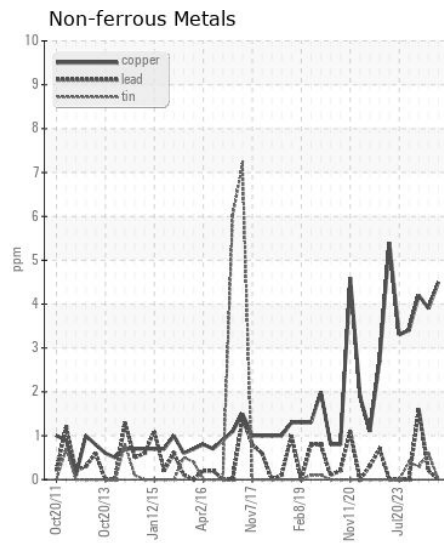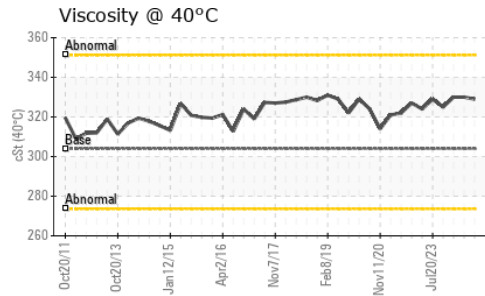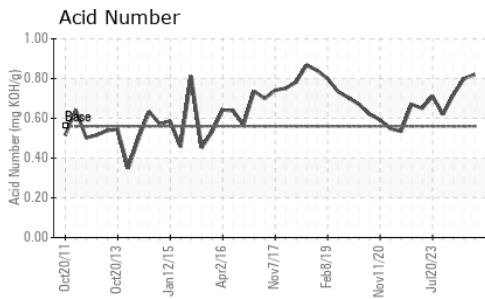

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0060741
Lab Number : 06240523
Unique Number : 11129357
Test Package : MAR 2

Received : 18 Jul 2024
Tested : 19 Jul 2024
Diagnosed : 19 Jul 2024 - Wes Davis

AMERICAN RIVER TRANSPORTATION CO.
 P.O. BOX 2889
 ST. LOUIS, MO
 US 63111
 Contact: BRIAN GRIEWING
 brian.griewing@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (314)481-5278