



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SOUTH HOLLAND
Machine Id
JLG 800AJ PL6978 (S/N 0300266978)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0002897	HPL0001709	---
Sample Date		Client Info		15 Jul 2024	27 Oct 2022	---
Machine Age	hrs	Client Info		1206	839	---
Oil Age	hrs	Client Info		0	800	---
Filter Age	hrs	Client Info		0	800	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	9	23	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	6	2	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	2	4	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	11	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	12.5	12.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	36.3	35.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m	250	8	130	---
Barium	ppm	ASTM D5185m	10	<1	0	---
Molybdenum	ppm	ASTM D5185m	100	565	517	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m	450	969	480	---
Calcium	ppm	ASTM D5185m	3000	2806	3730	---
Phosphorus	ppm	ASTM D5185m	1150	1073	733	---
Zinc	ppm	ASTM D5185m	1350	1269	1004	---
Sulfur	ppm	ASTM D5185m	4250	9905	18494	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	39.6	24.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	13.60	12.1	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.5	---

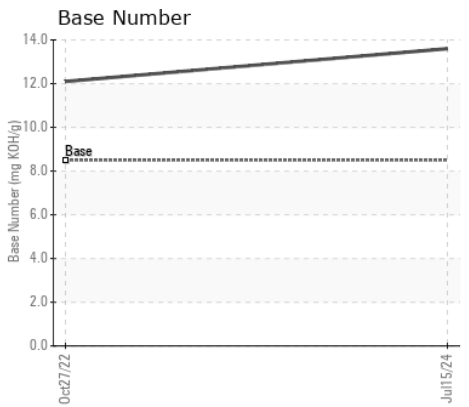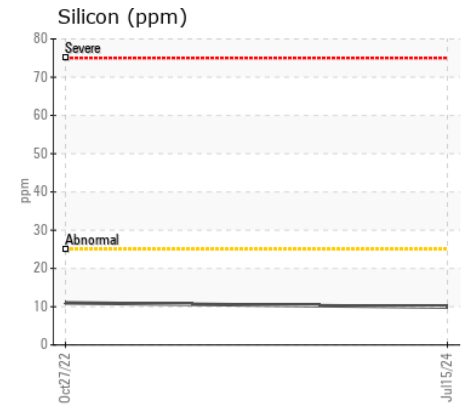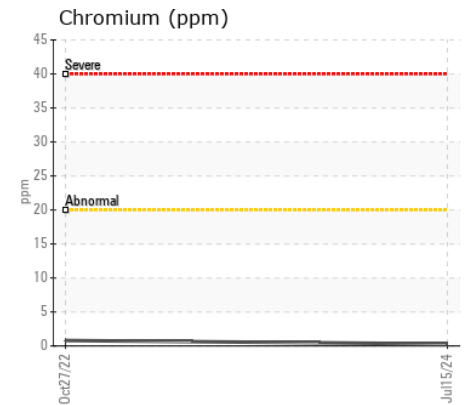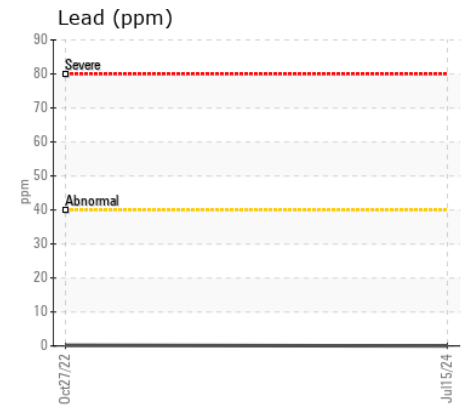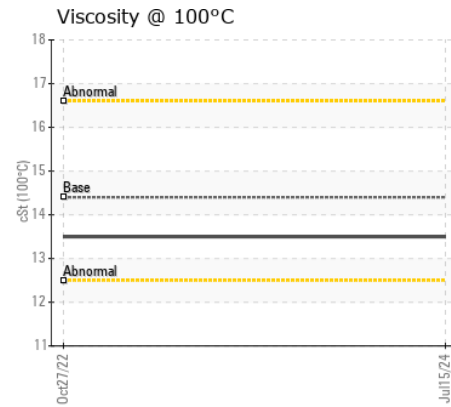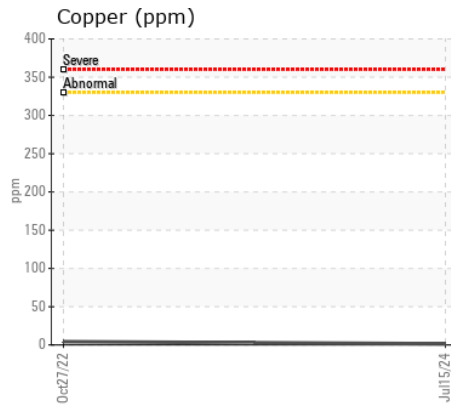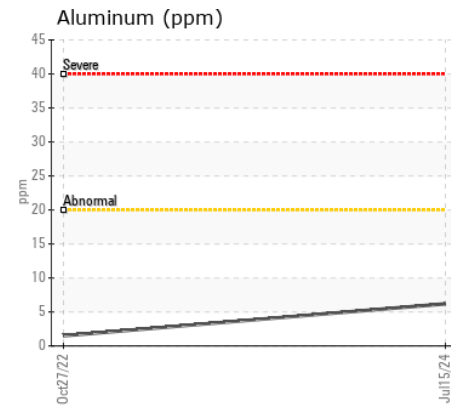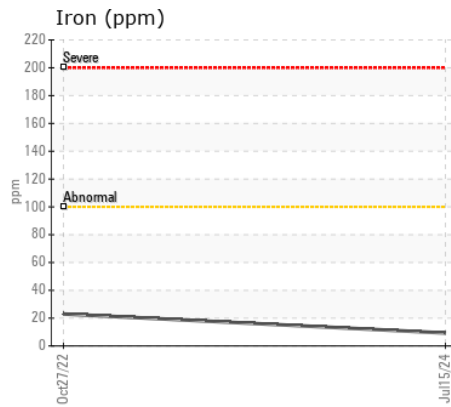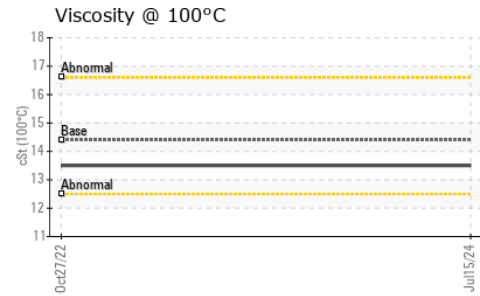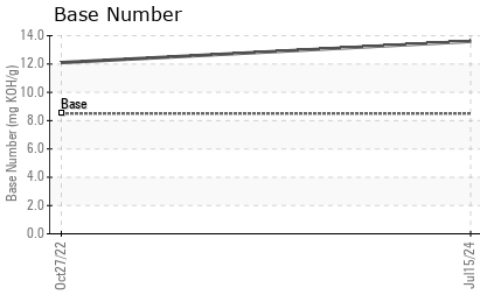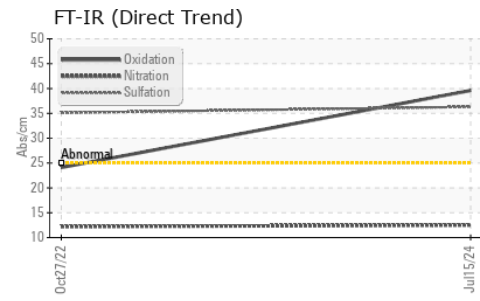

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : HPL0002897
 Lab Number : 06240529
 Unique Number : 11129363
 Test Package : MOB 2
 Received : 18 Jul 2024
 Tested : 19 Jul 2024
 Diagnosed : 20 Jul 2024 - Don Baldrige

STEVENS ON CRANE
 410 STEVENSON DR
 BOLINGBROOK, IL
 US 60440

Contact: DAVE KOEHNE
 davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)