



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W68410]

Machine Id
C222904 (S/N 1DW672GXVCE644735)

Component
Front Front Right 6WD Hub

Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W68410)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220360	JR0161622	---
Sample Date		Client Info		16 Jul 2024	16 May 2023	---
Machine Age	hrs	Client Info		5863	5863	---
Oil Age	hrs	Client Info		5863	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		14	19	---
Iron	ppm	ASTM D5185m	>200	12	39	---
Chromium	ppm	ASTM D5185m	>10	0	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m		<1	<1	---
Lead	ppm	ASTM D5185m		0	<1	---
Copper	ppm	ASTM D5185m		1	6	---
Tin	ppm	ASTM D5185m		0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m		4	4	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m	6	1	<1	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	145	93	94	---
Calcium	ppm	ASTM D5185m	3570	3421	3381	---
Phosphorus	ppm	ASTM D5185m	1290	993	1017	---
Zinc	ppm	ASTM D5185m	1640	1180	1263	---
Sulfur	ppm	ASTM D5185m		4354	4302	---
Visc @ 40°C	cSt	ASTM D445	57.0	55.5	57.3	---

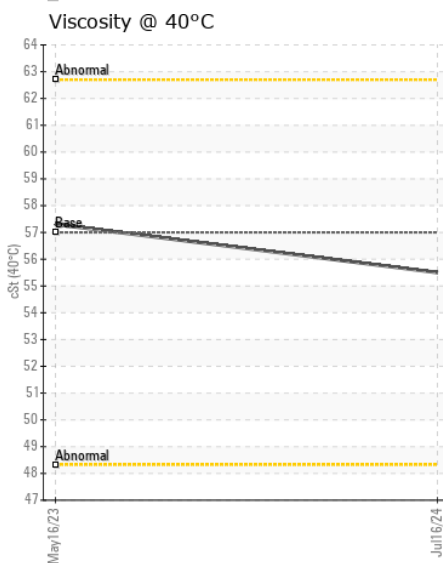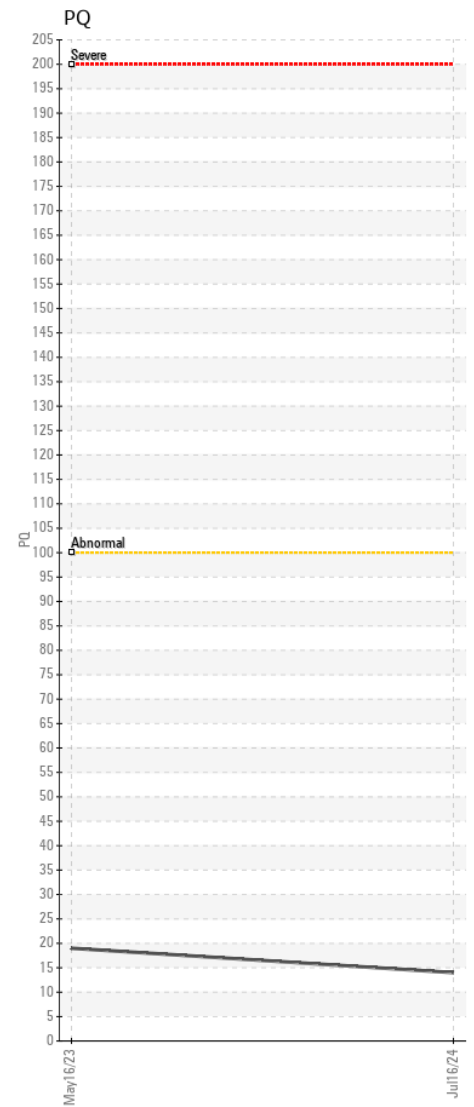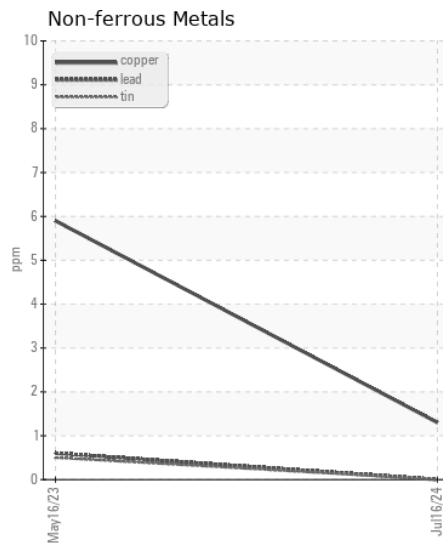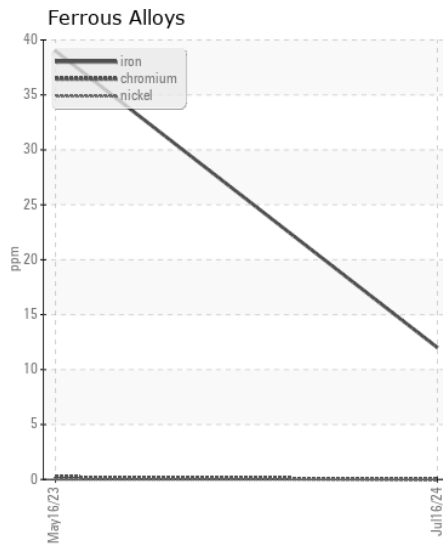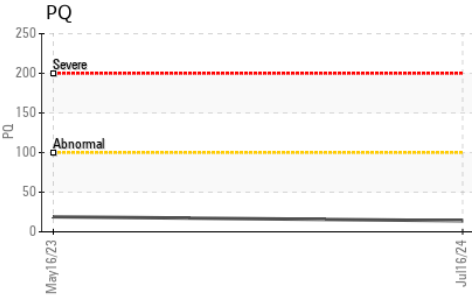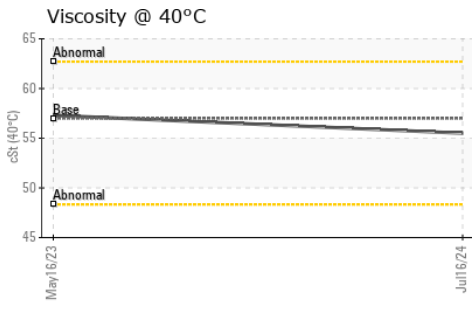

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220360 **Received** : 18 Jul 2024
Lab Number : 06240562 **Tested** : 19 Jul 2024
Unique Number : 11129396 **Diagnosed** : 20 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: James Ball
 JBall@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)596-6198