



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[16W16670]
 Machine Id
JOHN DEERE 650K 3601782 (S/N 1T0650KXLGF292963)
 Component
Right Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16670)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217414	JR0185471	JR0121912
Sample Date		Client Info		17 Jul 2024	05 Oct 2023	30 Jun 2022
Machine Age	hrs	Client Info		4963	4474	3942
Oil Age	hrs	Client Info		1021	532	967
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	42	40	20
Iron	ppm	ASTM D5185m	>750	30	20	25
Chromium	ppm	ASTM D5185m	>9	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	4	0	<1
Lead	ppm	ASTM D5185m	>15	0	<1	<1
Copper	ppm	ASTM D5185m	>40	<1	0	2
Tin	ppm	ASTM D5185m	>10	<1	0	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	7	7	10
Potassium	ppm	ASTM D5185m	>20	2	2	1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	2
Boron	ppm	ASTM D5185m	6	5	<1	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	2
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	145	101	102	104
Calcium	ppm	ASTM D5185m	3570	3446	3340	3755
Phosphorus	ppm	ASTM D5185m	1290	1055	1034	1062
Zinc	ppm	ASTM D5185m	1640	1234	1272	1397
Sulfur	ppm	ASTM D5185m		4103	3770	4799
Visc @ 40°C	cSt	ASTM D445	57.0	51.6	53.0	52.2

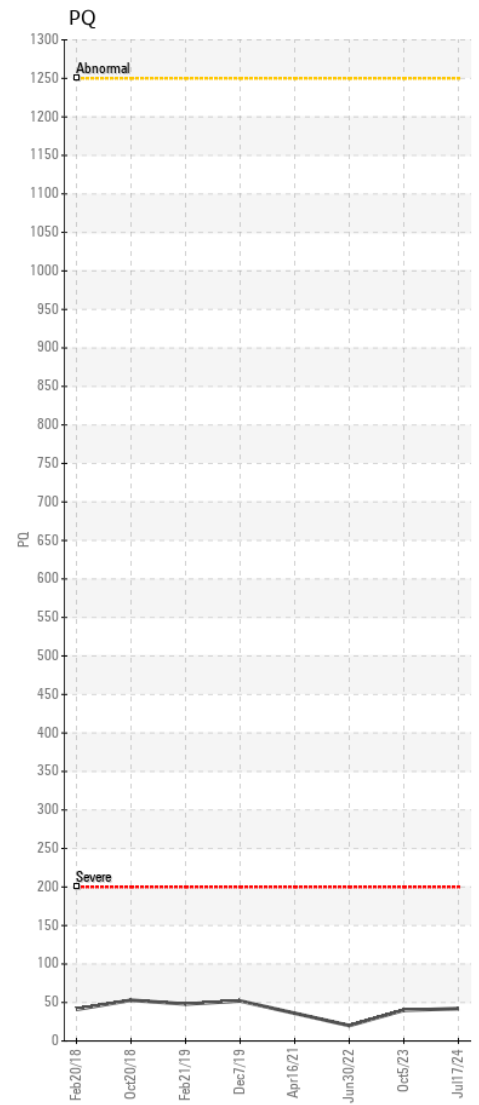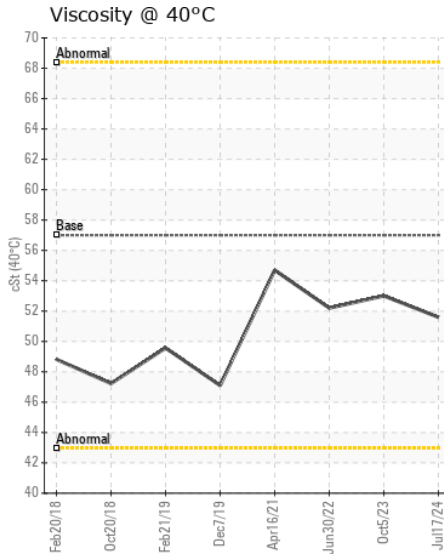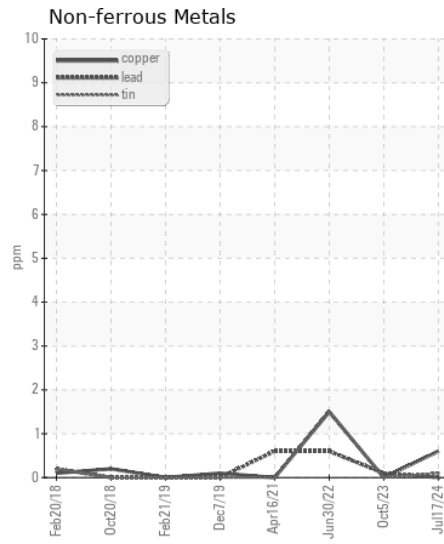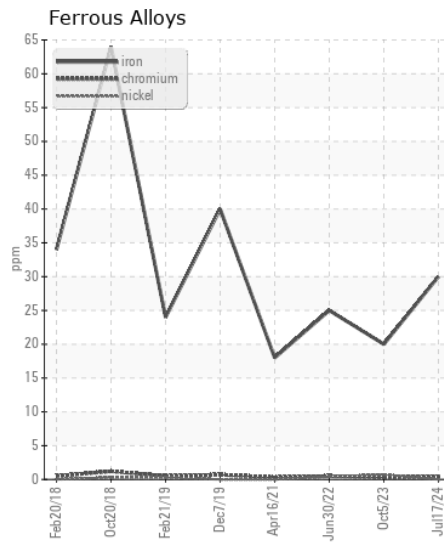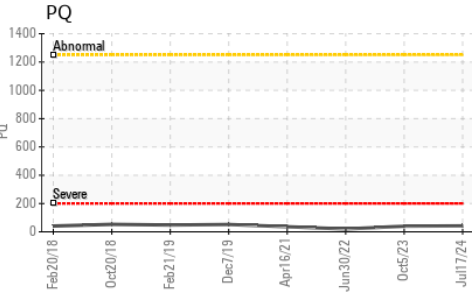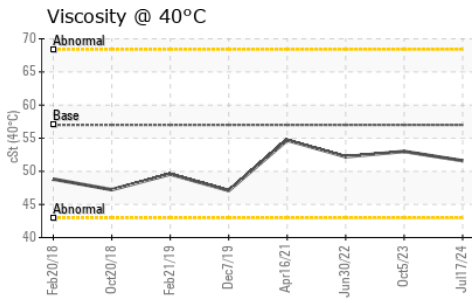

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217414 **Received** : 18 Jul 2024
Lab Number : 06240568 **Tested** : 19 Jul 2024
Unique Number : 11129402 **Diagnosed** : 20 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

tbod.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)