



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
pm 061248 (S/N A37586)
 Component
Right Final Drive
 Fluid
TDTO FLUID SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221292	JR0210309	---
Sample Date		Client Info		15 Jul 2024	07 Mar 2024	---
Machine Age	hrs	Client Info		5946	5444	---
Oil Age	hrs	Client Info		5444	0	---
Filter Age	hrs	Client Info		5444	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		60	58	---
Iron	ppm	ASTM D5185m	>500	109	76	---
Chromium	ppm	ASTM D5185m	>10	2	2	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	5	5	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	2	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	33	30	---
Potassium	ppm	ASTM D5185m	>20	3	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	37	6	3	---
Barium	ppm	ASTM D5185m	7	0	0	---
Molybdenum	ppm	ASTM D5185m	5	2	2	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	40	14	14	---
Calcium	ppm	ASTM D5185m	2650	4316	3741	---
Phosphorus	ppm	ASTM D5185m	1050	905	838	---
Zinc	ppm	ASTM D5185m	1075	1087	1003	---
Sulfur	ppm	ASTM D5185m	5750	5889	6172	---
Visc @ 40°C	cSt	ASTM D445	101	90.9	94.4	---

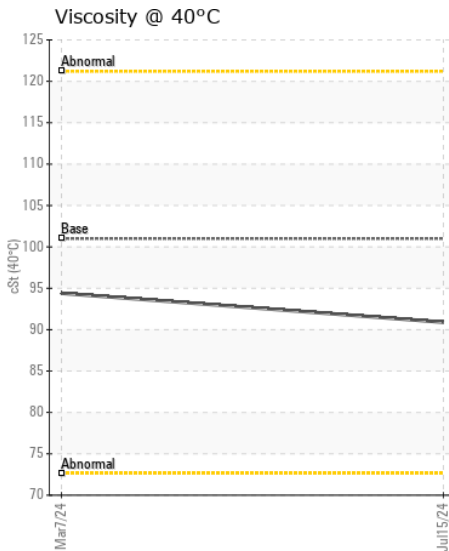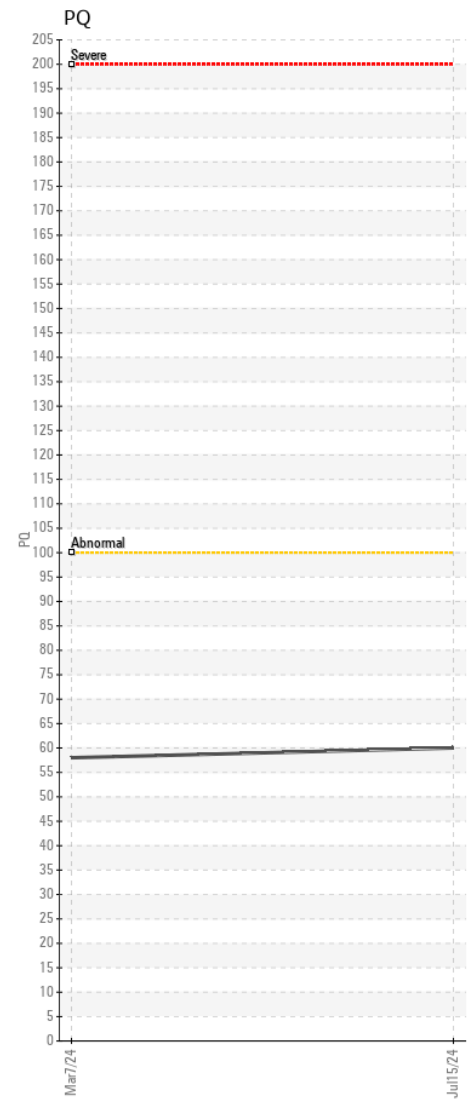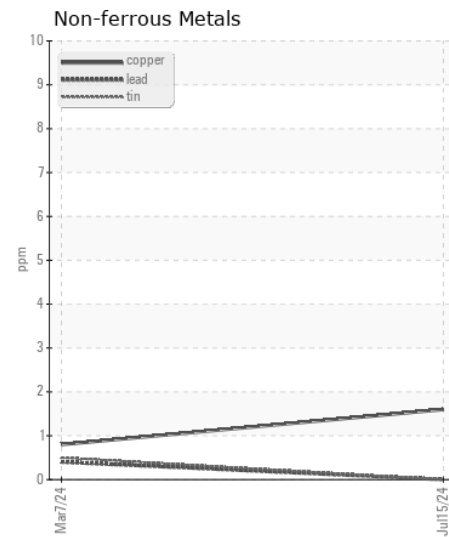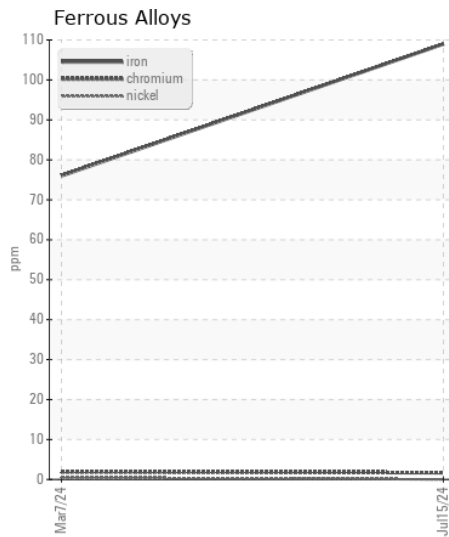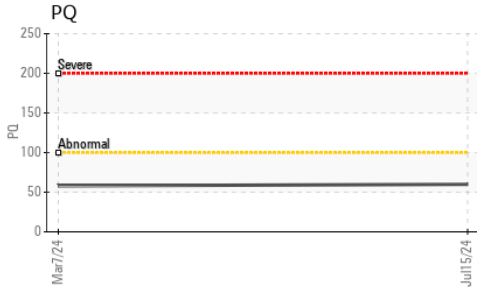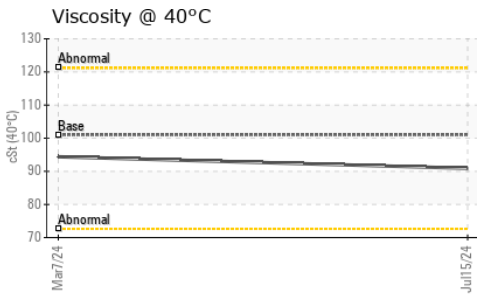

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221292 **Received** : 18 Jul 2024
Lab Number : 06240599 **Tested** : 19 Jul 2024
Unique Number : 11129433 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: COTY MAGAHA
 coty.magaha@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (540)869-0549