



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM715231]
 Machine Id
SENNEBOGEN 835 835.0.3282
 Component
Rear Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446411	VCP436921	---
Sample Date		Client Info		25 Jun 2024	08 Dec 2023	---
Machine Age	hrs	Client Info		1200	223	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	23	81	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	4	0	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	7	17	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	3	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	2	---
Boron	ppm	ASTM D5185m	400	3	15	---
Barium	ppm	ASTM D5185m	200	61	368	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	12	2	0	---
Calcium	ppm	ASTM D5185m	150	25	81	---
Phosphorus	ppm	ASTM D5185m	1650	624	1225	---
Zinc	ppm	ASTM D5185m	125	23	48	---
Sulfur	ppm	ASTM D5185m	22500	22477	27679	---
Visc @ 40°C	cSt	ASTM D445	143	146	181	---

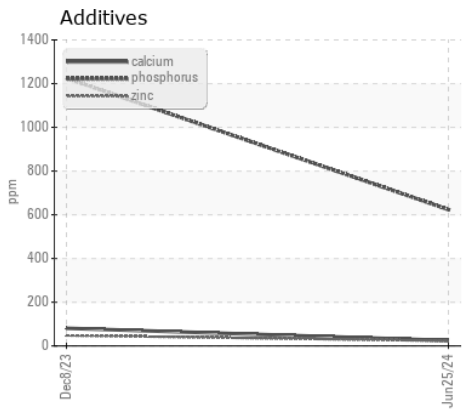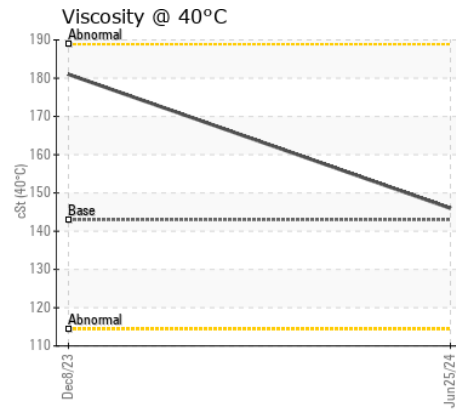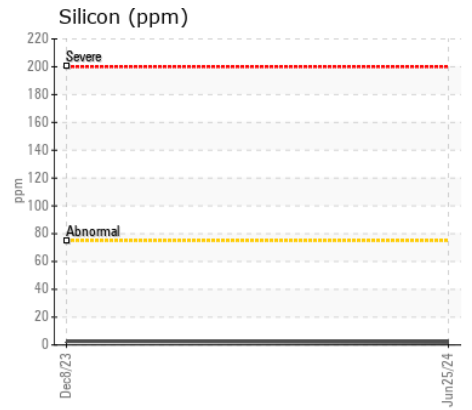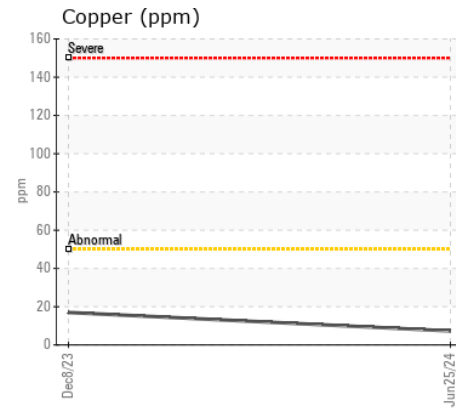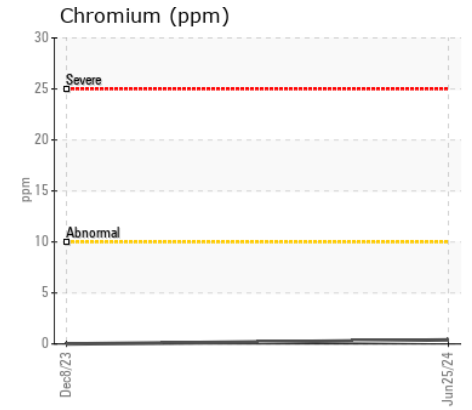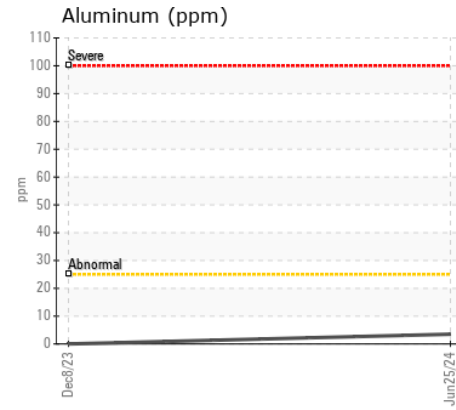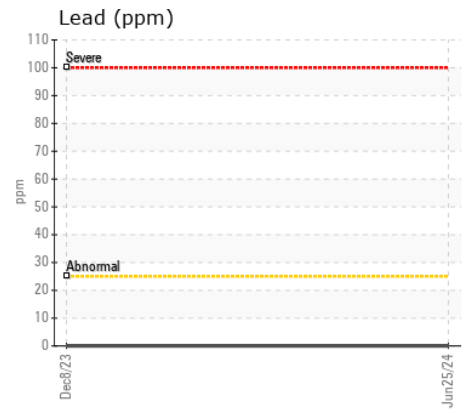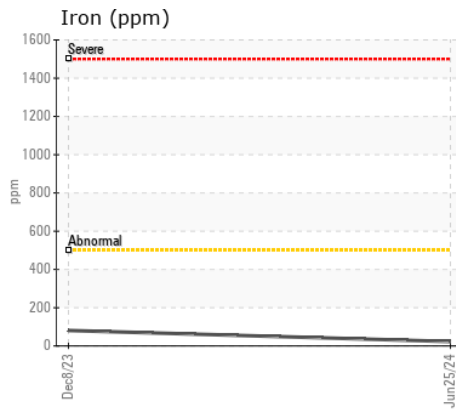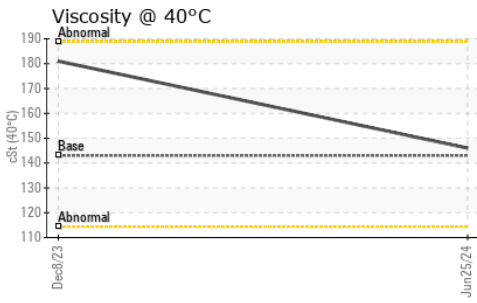

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP446411 **Received** : 18 Jul 2024
Lab Number : 06240657 **Tested** : 19 Jul 2024
Unique Number : 11129491 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BELSON STEEL
 1685 N STATE RTE 50
 BOURBONNAIS, IL
 US 60914
 Contact: M. POZAN
 mpozan@belsonsteel.com
 T: (815)932-7416
 F: