



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery/500 Hour CSA
Machine Id
VOLVO A45G 2362 (S/N A45GV752171)
Component
Wet Disc Brake
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009161	ASC0010296	---
Sample Date		Client Info		16 Jul 2024	01 Apr 2024	---
Machine Age	hrs	Client Info		1072	501	---
Oil Age	hrs	Client Info		1072	501	---
Filter Age	hrs	Client Info		1072	501	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	23	14	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	4	3	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>10	1	2	---
Lead	ppm	ASTM D5185m	>10	<1	1	---
Copper	ppm	ASTM D5185m	>75	65	14	---
Tin	ppm	ASTM D5185m	>10	0	1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	11	11	---
Potassium	ppm	ASTM D5185m	>20	3	5	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m		142	135	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		5	6	---
Calcium	ppm	ASTM D5185m		3540	3816	---
Phosphorus	ppm	ASTM D5185m		1286	1355	---
Zinc	ppm	ASTM D5185m		1475	1558	---
Sulfur	ppm	ASTM D5185m		5151	6238	---
Visc @ 40°C	cSt	ASTM D445		42.6	44.9	---

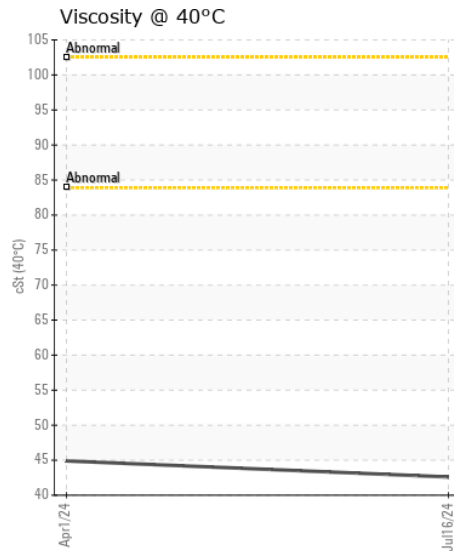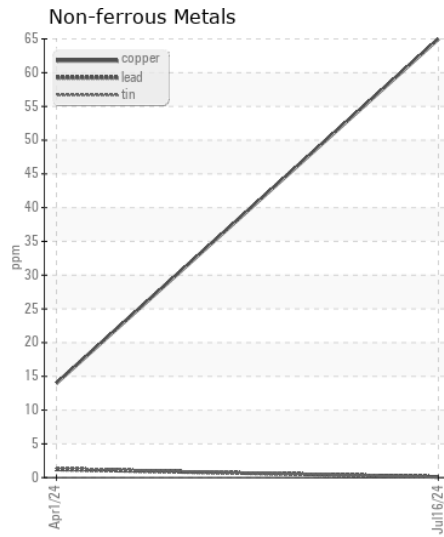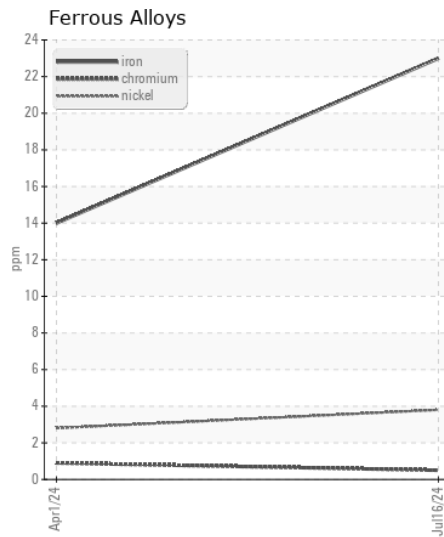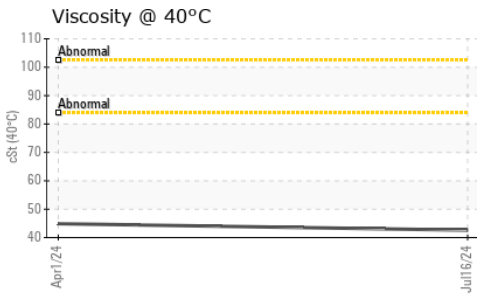

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009161 **Received** : 18 Jul 2024
Lab Number : 06240705 **Tested** : 19 Jul 2024
Unique Number : 11129539 **Diagnosed** : 20 Jul 2024 - Don Baldrige
Test Package : CONST

G S MATERIALS INC
 PO BOX 1335
 BURLINGTON, NC
 US 27216

Contact: KAREN NEWPORT
 Gsmaterials@windstream.net
 T: (919)499-9322
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)