



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M MH-13 (S/N 080364-1200)
Component
Front Left Wheel Hub
Fluid
DURALENE Posi-Traction 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0036656	DC0019150	---
Sample Date		Client Info		18 Jul 2024	14 Mar 2022	---
Machine Age	hrs	Client Info		4943	3782	---
Oil Age	hrs	Client Info		2000	3000	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>450	187	195	---
Chromium	ppm	ASTM D5185m	>4	1	3	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	4	---
Aluminum	ppm	ASTM D5185m	>15	1	2	---
Lead	ppm	ASTM D5185m	>4	0	0	---
Copper	ppm	ASTM D5185m	>75	16	22	---
Tin	ppm	ASTM D5185m		<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	6	8	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	10	---
Boron	ppm	ASTM D5185m		145	33	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		2	3	---
Magnesium	ppm	ASTM D5185m		4	4	---
Calcium	ppm	ASTM D5185m		299	812	---
Phosphorus	ppm	ASTM D5185m		1178	1638	---
Zinc	ppm	ASTM D5185m		108	282	---
Sulfur	ppm	ASTM D5185m		17786	16215	---
Visc @ 40°C	cSt	ASTM D445		130	135	---

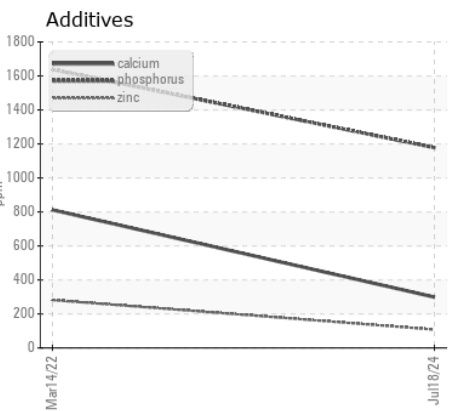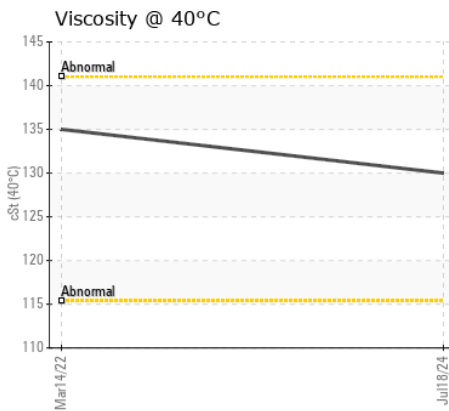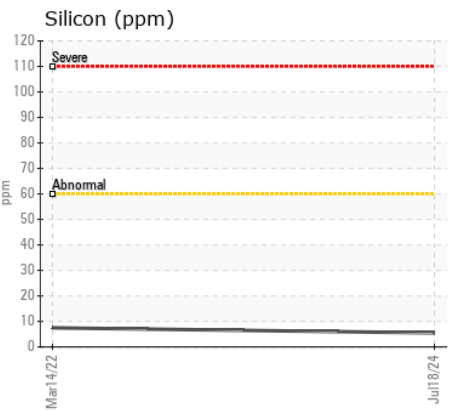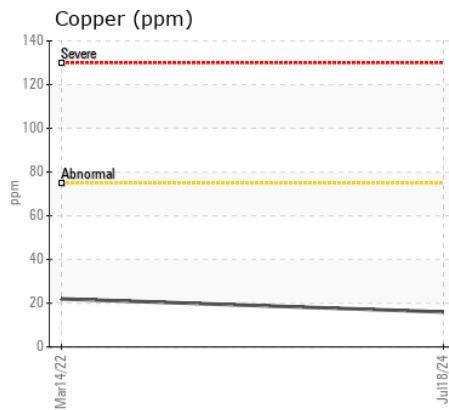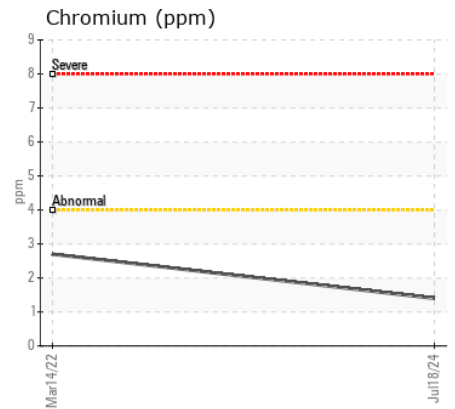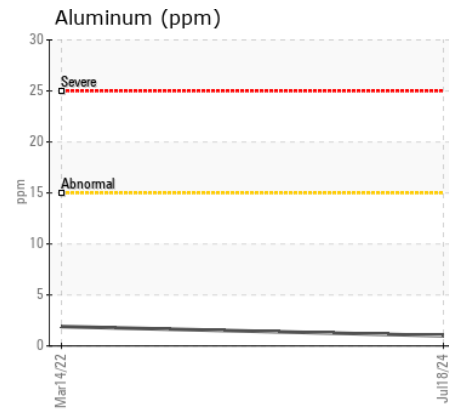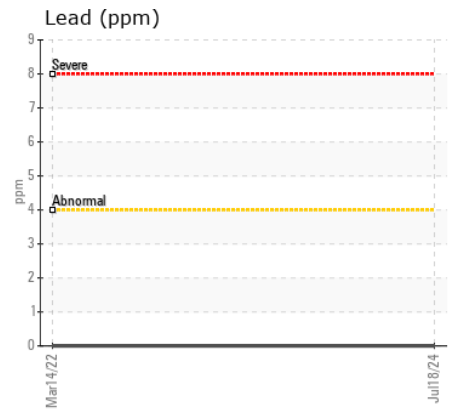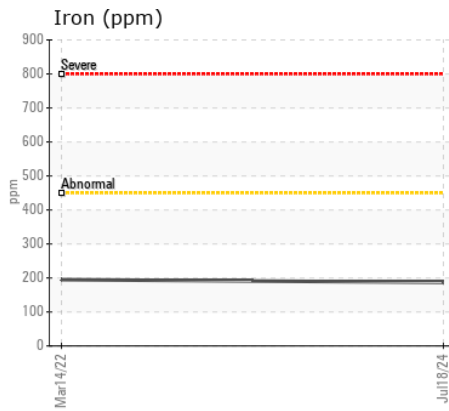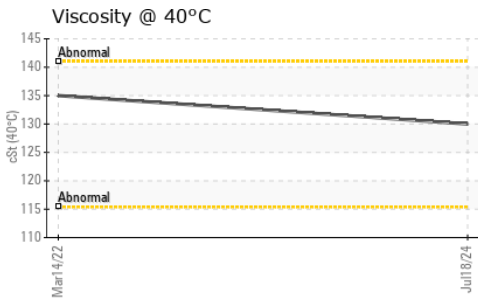

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0036656 **Received** : 18 Jul 2024
Lab Number : 06240729 **Tested** : 19 Jul 2024
Unique Number : 11129563 **Diagnosed** : 19 Jul 2024 - Wes Davis
Test Package : MOB 1

CONSERVIT INC.
 PO BOX 1517
 HAGERSTOWN, MD
 US 21740
 Contact: DON LONG

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (301)791-0100
 F: (301)739-8548