



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

Ascendum Machinery

Machine Id

VOLVO L150H 6871

Component

Front Axle

Fluid

VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008279	ASC0007343	ASC0000342
Sample Date		Client Info		12 Jul 2024	17 Apr 2024	20 Jul 2023
Machine Age	hrs	Client Info		10006	9485	8018
Oil Age	hrs	Client Info		8539	1467	1028
Filter Age	hrs	Client Info		0	0	3977
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	20	20	55
Chromium	ppm	ASTM D5185m	>20	0	<1	2
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	2	1
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>120	6	6	24
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	8	9	10
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	1	7
Boron	ppm	ASTM D5185m		97	129	144
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		6	8	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		29	37	19
Calcium	ppm	ASTM D5185m		3318	3388	3995
Phosphorus	ppm	ASTM D5185m		1165	1327	1355
Zinc	ppm	ASTM D5185m		1209	1449	1700
Sulfur	ppm	ASTM D5185m		4086	4182	4801
Visc @ 40°C	cSt	ASTM D445	55	48.0	48.2	41.6

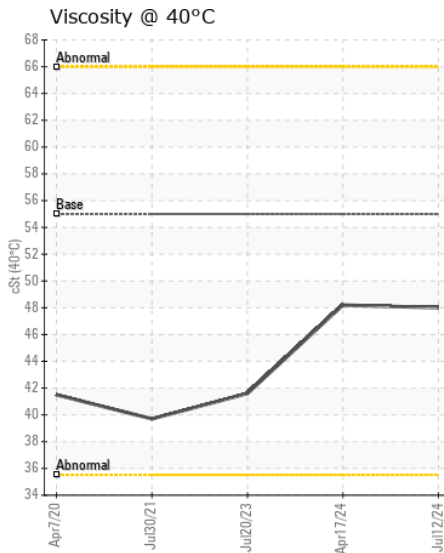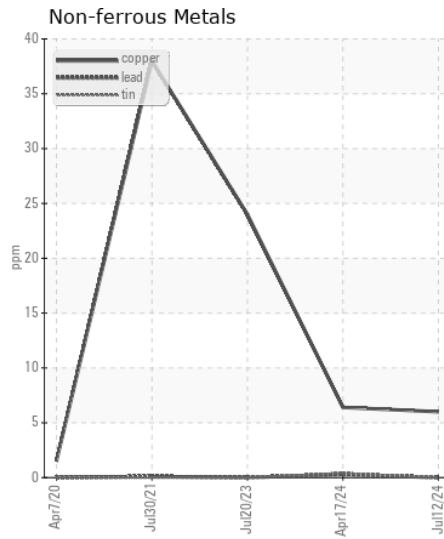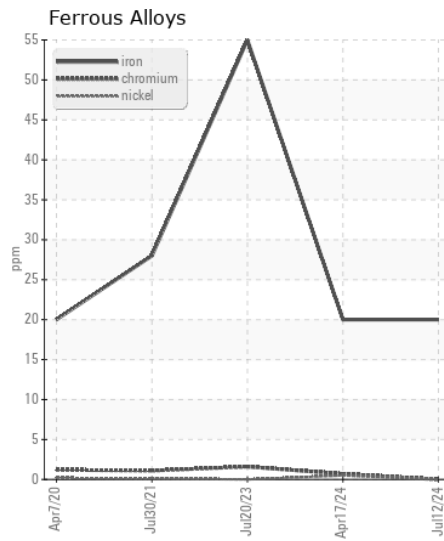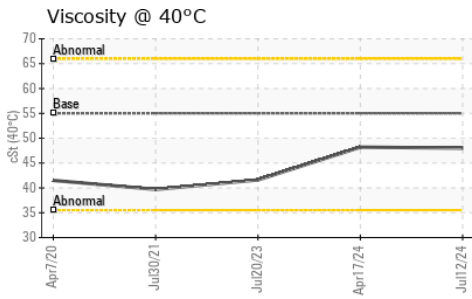

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0008279

Lab Number : 06240772

Unique Number : 11129606

Test Package : CONST

Received : 18 Jul 2024

Tested : 19 Jul 2024

Diagnosed : 19 Jul 2024 - Wes Davis

PALLET ONE

1032 WILKINS RD

BUTNER, NC

US 27509

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: