



ASCENDUM

OIL ANALYSIS REPORT



Area
Ascendum Machinery
 Machine Id
VOLVO L90H 624585
 Component
Rear Axle
 Fluid
TRANSAXLE OIL SAE 75W80 (--- GAL)

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009699	ASC0007035	ASC0001640
Sample Date		Client Info		15 Jul 2024	10 Apr 2024	10 Jan 2024
Machine Age	hrs	Client Info		8488	8008	7512
Oil Age	hrs	Client Info		480	6527	1481
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Changed	Not Chngd
Filter Changed		Client Info		N/A	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	32	79	100
Chromium	ppm	ASTM D5185m	>20	0	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	4	3
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>120	0	6	5
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	12	23	28
Potassium	ppm	ASTM D5185m	>20	0	<1	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	5	0
Boron	ppm	ASTM D5185m	160	101	68	87
Barium	ppm	ASTM D5185m	10	0	0	3
Molybdenum	ppm	ASTM D5185m	25	0	0	<1
Manganese	ppm	ASTM D5185m		<1	1	1
Magnesium	ppm	ASTM D5185m	12	12	10	11
Calcium	ppm	ASTM D5185m	3750	3769	2151	2362
Phosphorus	ppm	ASTM D5185m	1200	1189	851	874
Zinc	ppm	ASTM D5185m	1500	1397	1027	1138
Sulfur	ppm	ASTM D5185m	6000	4196	3392	3566
Visc @ 40°C	cSt	ASTM D445	48	42.8	42.8	42.9

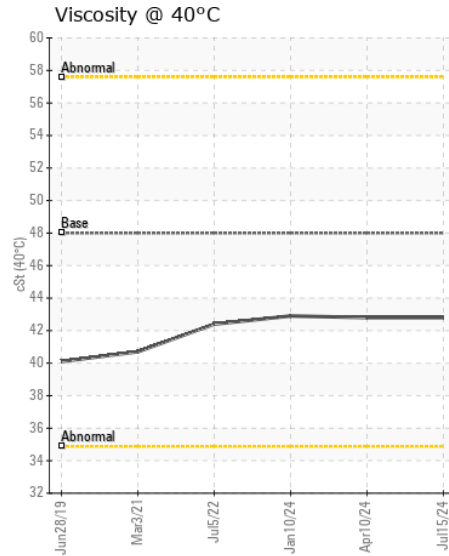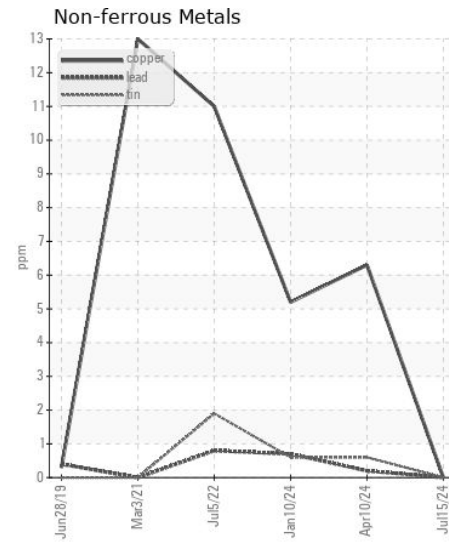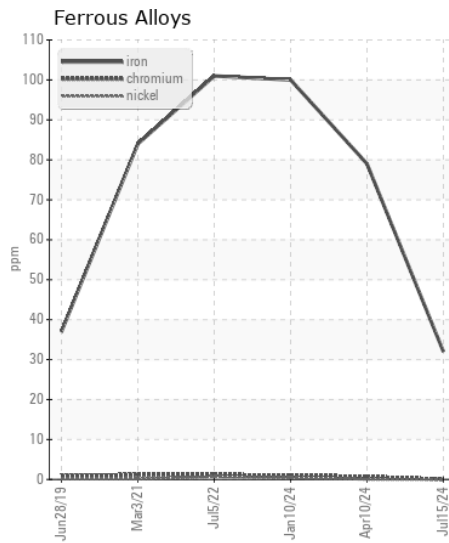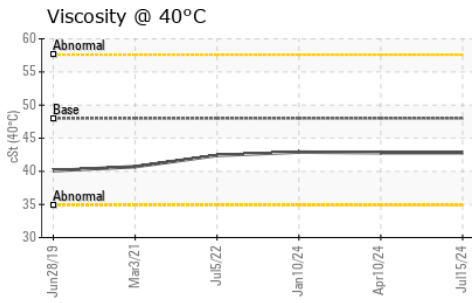

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009699
Lab Number : 06240783
Unique Number : 11129617
Test Package : CONST

Received : 18 Jul 2024
Tested : 19 Jul 2024
Diagnosed : 19 Jul 2024 - Wes Davis

IAA - INSURANCE AUTO AUCTIONS - OAK BROOK
 701 HARGER RD, SUITE 201
 OAK BROOK, IL
 US 60523
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: