



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
KOMATSU PC-290 TH-13 - A25787
Component
Right Final Drive
Fluid
TDTO FLUID SAE 30 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005642	CL0004602	CL0004220
Sample Date		Client Info		07 Jul 2024	16 Aug 2023	13 Apr 2023
Machine Age	hrs	Client Info		11350	10705	10340
Oil Age	hrs	Client Info		1010	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	104	51	104
Chromium	ppm	ASTM D5185m	>10	2	1	5
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	13	7	18
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	48	28	65
Potassium	ppm	ASTM D5185m	>20	1	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	4	4
Boron	ppm	ASTM D5185m	37	6	<1	0
Barium	ppm	ASTM D5185m	7	0	0	0
Molybdenum	ppm	ASTM D5185m	5	4	5	2
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m	40	57	70	25
Calcium	ppm	ASTM D5185m	2650	3439	3285	3282
Phosphorus	ppm	ASTM D5185m	1050	1112	1035	976
Zinc	ppm	ASTM D5185m	1075	1274	1262	1250
Sulfur	ppm	ASTM D5185m	5750	6013	5576	4667
Visc @ 40°C	cSt	ASTM D445	101	90.7	94.3	92.9


Viscosity @ 40°C

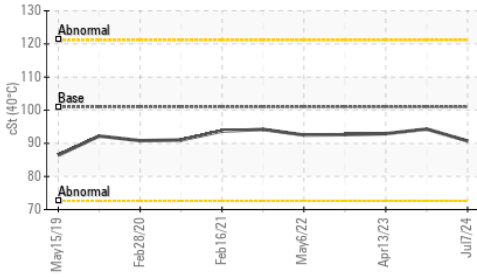


Ferrous Alloys

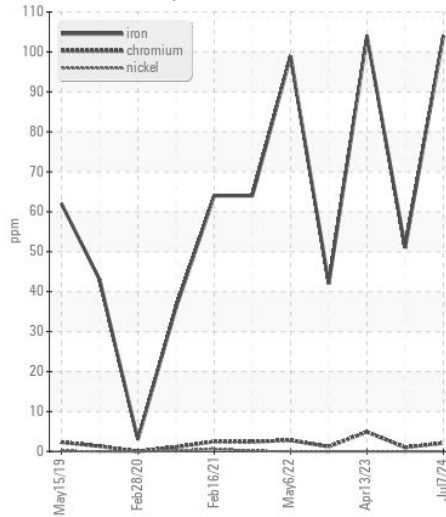

Non-ferrous Metals

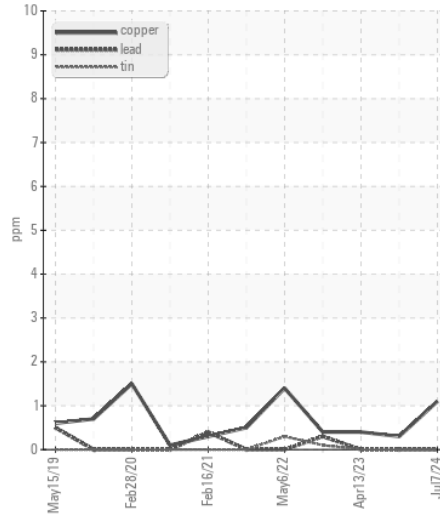

Viscosity @ 40°C

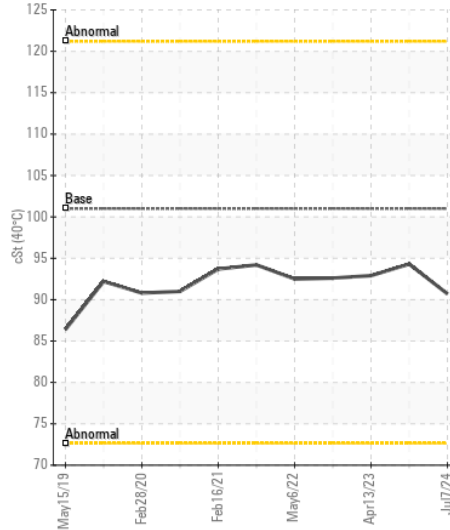

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005642
Lab Number : 06241050
Unique Number : 11129884
Test Package : CONST
Received : 18 Jul 2024
Tested : 20 Jul 2024
Diagnosed : 20 Jul 2024 - Wes Davis

PEDULLA
 146 MCLELLAND
 MOORESVILLE, NC
 US 28115
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: