



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2311
 Component
Diesel Engine
 Fluid
ROYAL PURPLE MOTOR OIL 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0719806	WC0719984	WC0719876
Sample Date		Client Info		21 Jun 2024	15 Jun 2024	03 Mar 2024
Machine Age	mls	Client Info		271059	274648	224542
Oil Age	mls	Client Info		50000	50000	100000
Filter Age	mls	Client Info		50000	50000	50000
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	39	6	95
Chromium	ppm	ASTM D5185m	>20	1	<1	4
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	8	3	32
Lead	ppm	ASTM D5185m	>40	0	0	1
Copper	ppm	ASTM D5185m	>330	33	10	93
Tin	ppm	ASTM D5185m	>15	<1	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	4	11
Potassium	ppm	ASTM D5185m	>20	18	11	74
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.1	0.1	2.2
Nitration	Abs/cm	*ASTM D7624	>20	10.6	6.1	16.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.6	20.1	32.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	4
Boron	ppm	ASTM D5185m	0	0	198	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	100	1	4	2
Manganese	ppm	ASTM D5185m		<1	0	2
Magnesium	ppm	ASTM D5185m	60	21	28	30
Calcium	ppm	ASTM D5185m	3050	2565	2127	2791
Phosphorus	ppm	ASTM D5185m	1050	902	880	1006
Zinc	ppm	ASTM D5185m	1200	1163	1137	1190
Sulfur	ppm	ASTM D5185m	12500	3152	3155	3131
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.3	15.9	31.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	4.7	8.0	2.8
Visc @ 100°C	cSt	ASTM D445	14.9	13.7	14.2	15.0


FT-IR (Direct Trend)

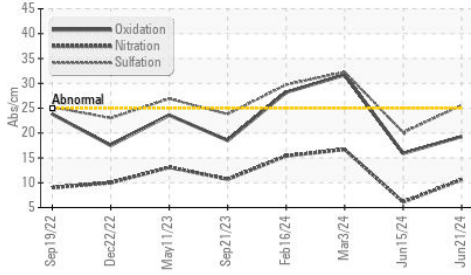


Ferrous Alloys

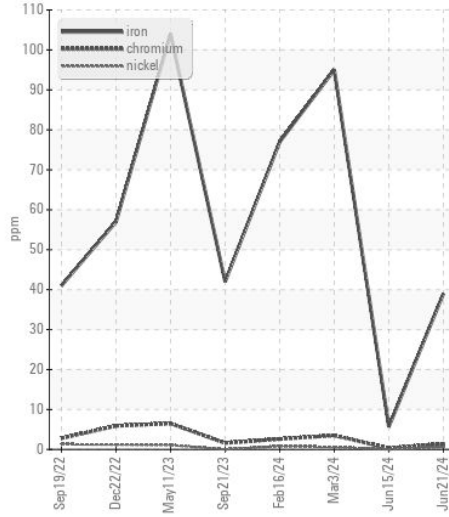


Base Number

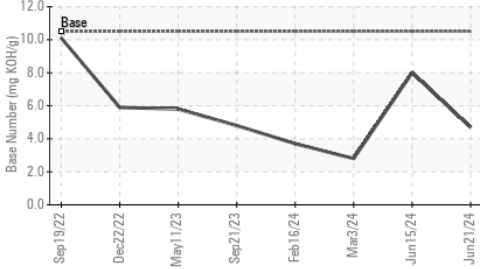


Viscosity @ 100°C

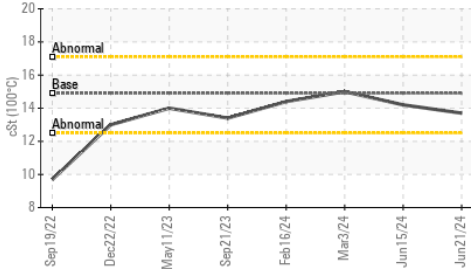


Non-ferrous Metals

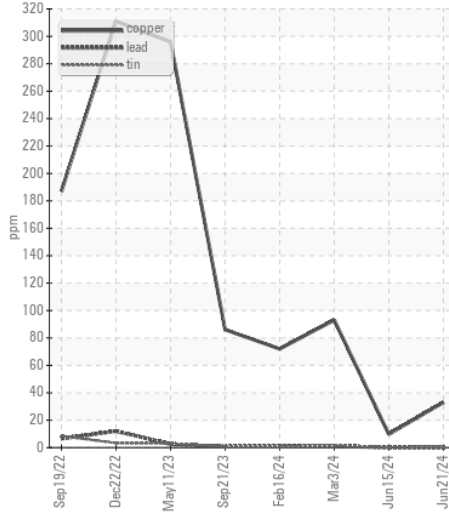

Viscosity @ 100°C

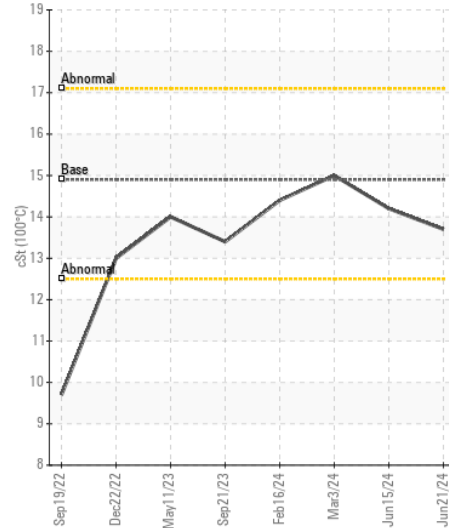

Base Number

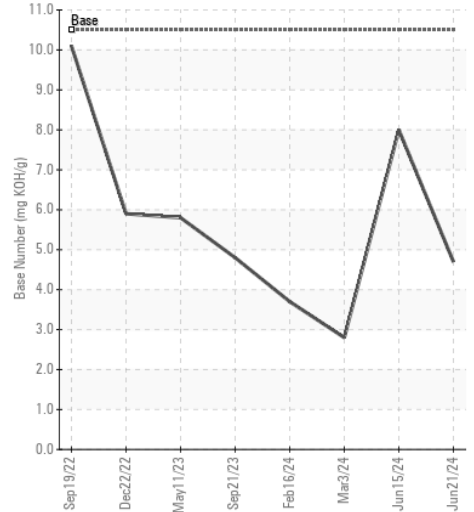

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0719806
Lab Number : 06241104
Unique Number : 11129938
Test Package : FLEET

Received : 18 Jul 2024
Tested : 19 Jul 2024
Diagnosed : 19 Jul 2024 - Wes Davis

DILLON TRANSPORTATION
 4445 NORTH INTERSTATE WAY
 KINGMAN, AZ
 US 86401
 Contact: T LAMOREAUX
 t.lamoreaux@dillontransportation.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: