



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER 36172
Component
Diesel Engine
Fluid
CHEVRON 15W40 (25 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0948697	WC0857882	WC0799580
Sample Date		Client Info		02 Jul 2024	12 Oct 2023	25 Jul 2023
Machine Age	mls	Client Info		312735	305347	297785
Oil Age	mls	Client Info		7388	7562	3083
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	22	23	29
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	5	4	2
Lead	ppm	ASTM D5185m	>30	0	0	<1
Copper	ppm	ASTM D5185m	>150	1	2	2
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	7	5	5
Potassium	ppm	ASTM D5185m	>20	5	3	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.2	12.6	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.9	27.1	27.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	2	3	2
Boron	ppm	ASTM D5185m		151	8	5
Barium	ppm	ASTM D5185m		0	3	0
Molybdenum	ppm	ASTM D5185m		98	82	81
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		754	1180	1251
Calcium	ppm	ASTM D5185m		1460	1429	1444
Phosphorus	ppm	ASTM D5185m		1147	1208	1307
Zinc	ppm	ASTM D5185m		1459	1508	1604
Sulfur	ppm	ASTM D5185m		3089	3195	3911
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.9	24.6	24.5
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	8.7	10.1
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	14.1	14.8


FT-IR (Direct Trend)

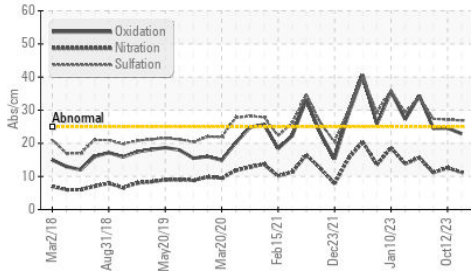


Base Number

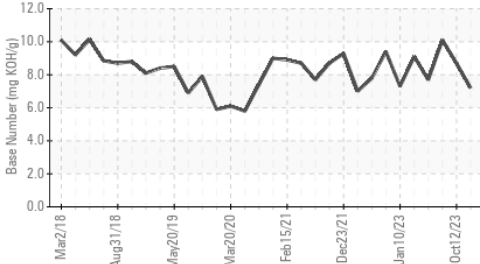


Viscosity @ 100°C

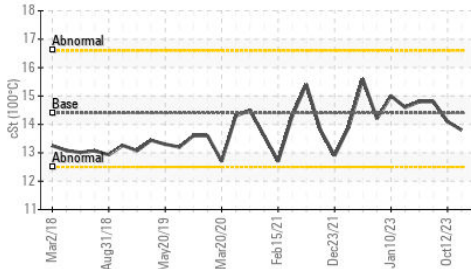


Ferrous Alloys

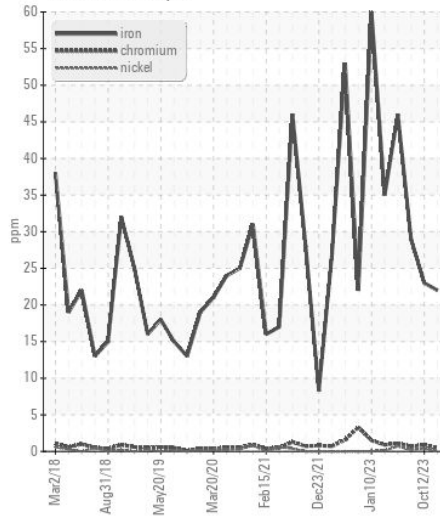


Non-ferrous Metals

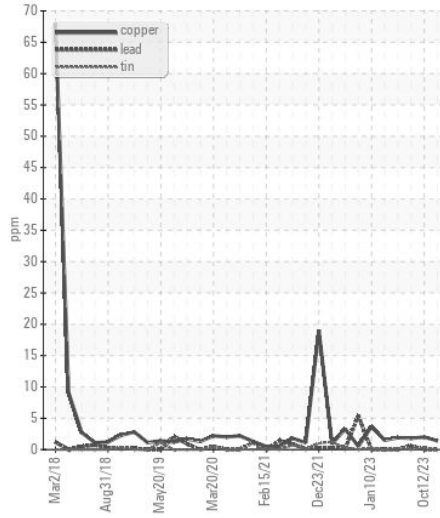

Viscosity @ 100°C

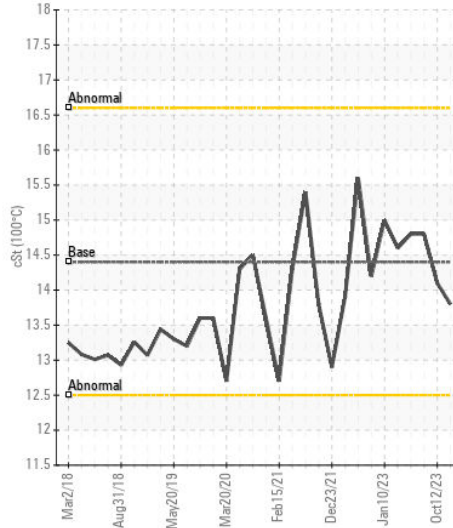

Base Number

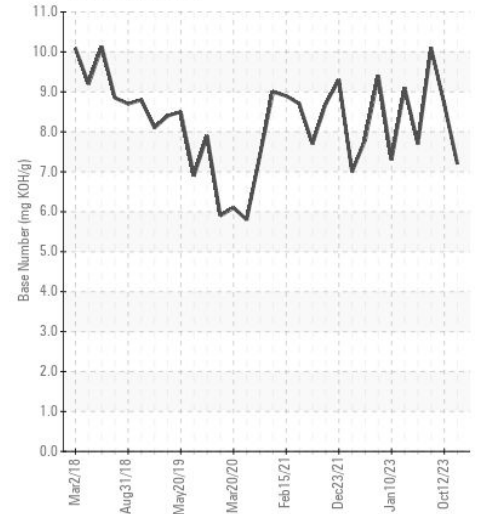

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0948697

Lab Number : 06241246

Unique Number : 11130080

Test Package : FLEET

Received : 18 Jul 2024

Tested : 19 Jul 2024

Diagnosed : 19 Jul 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION

198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105

Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)