



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**MACK 129056-SW8901**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL DELVAC ELITE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0111270</b>	GFL0111284	GFL0095469
Sample Date		Client Info		<b>16 Jul 2024</b>	12 Mar 2024	15 Jan 2024
Machine Age	hrs	Client Info		<b>10817</b>	10058	9613
Oil Age	hrs	Client Info		<b>759</b>	0	500
Filter Age	hrs	Client Info		<b>0</b>	0	500
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>3</b>	<1	3
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	1	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	5
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	9.2	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.0</b>	18.0	17.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	2	0
Boron	ppm	ASTM D5185m		<b>58</b>	110	123
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>124</b>	135	123
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>641</b>	694	627
Calcium	ppm	ASTM D5185m		<b>1196</b>	1300	1191
Phosphorus	ppm	ASTM D5185m		<b>680</b>	754	706
Zinc	ppm	ASTM D5185m		<b>813</b>	877	804
Sulfur	ppm	ASTM D5185m		<b>2866</b>	3473	3322
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.1</b>	15.3	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	<b>5.4</b>	5.4	6.4
Visc @ 100°C	cSt	ASTM D445	15.2	<b>13.0</b>	12.9	13.2


**FT-IR (Direct Trend)**

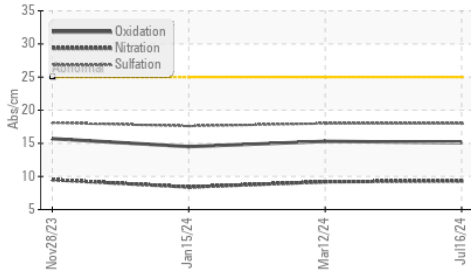


**Ferrous Alloys**

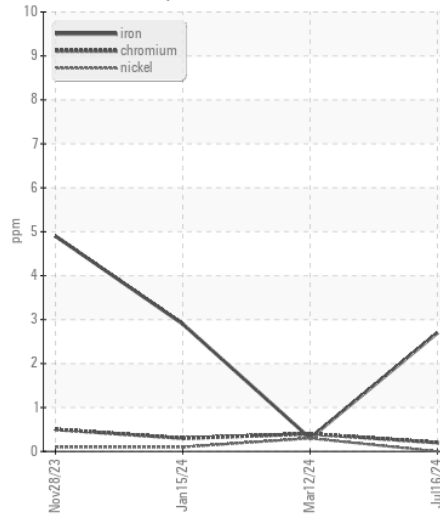


**Base Number**

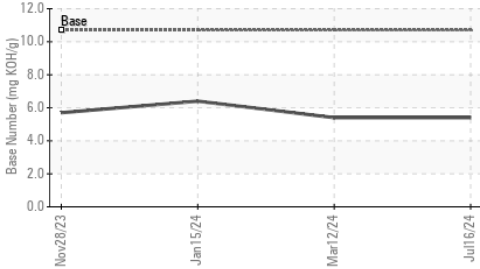


**Non-ferrous Metals**

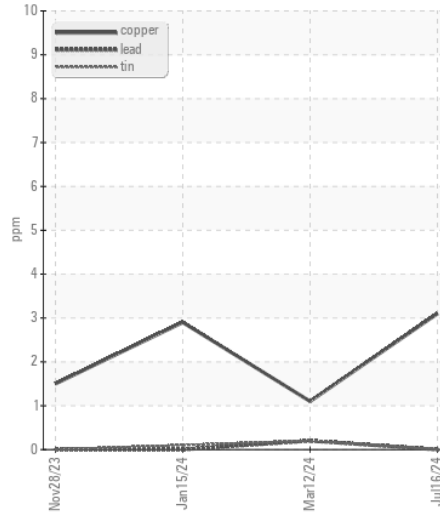


**Viscosity @ 100°C**

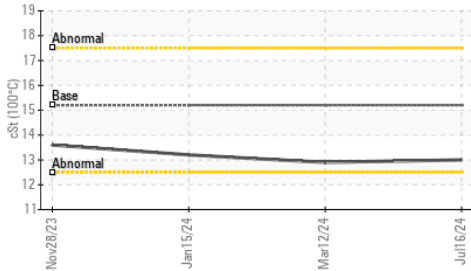

**Viscosity @ 100°C**

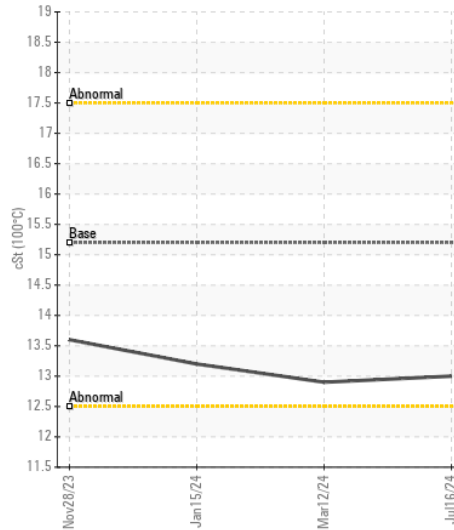

**Base Number**

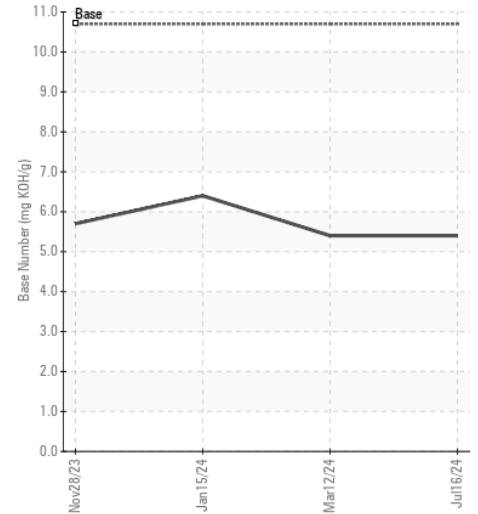

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111270  
**Lab Number** : 06241373  
**Unique Number** : 11130207  
**Test Package** : FLEET

**Received** : 19 Jul 2024  
**Tested** : 20 Jul 2024  
**Diagnosed** : 20 Jul 2024 - Wes Davis

**GFL Environmental - 981 - Port Arthur Hauling**  
 1000 S Business Park Dr  
 Port Arthur, TX  
 US 77640

Contact: MICHAEL KAY  
 mkay@gflenv.com  
 T: (336)660-9331

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: