



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
MACK 129060-SW8905
Component
Diesel Engine
Fluid
MOBIL DELVAC ELITE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111272	GFL0111343	---
Sample Date		Client Info		09 Jul 2024	12 Feb 2024	---
Machine Age	hrs	Client Info		11014	10231	---
Oil Age	hrs	Client Info		783	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	4	4	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	4	3	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	5	8	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	4	---
Potassium	ppm	ASTM D5185m	>20	7	4	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>4	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	18.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	2	---
Boron	ppm	ASTM D5185m		55	94	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		118	117	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		626	653	---
Calcium	ppm	ASTM D5185m		1237	1237	---
Phosphorus	ppm	ASTM D5185m		698	705	---
Zinc	ppm	ASTM D5185m		829	798	---
Sulfur	ppm	ASTM D5185m		3039	3119	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	5.1	5.6	---
Visc @ 100°C	cSt	ASTM D445	15.2	13.5	12.9	---

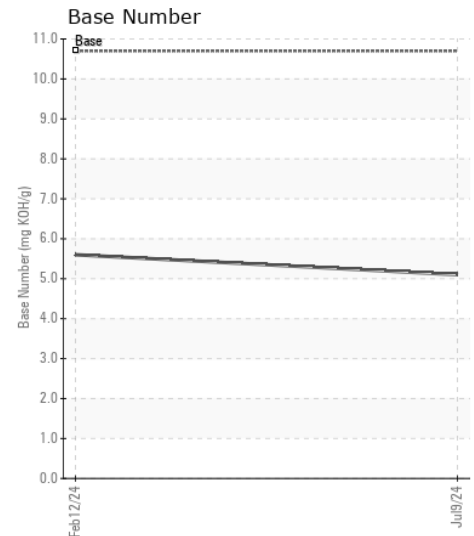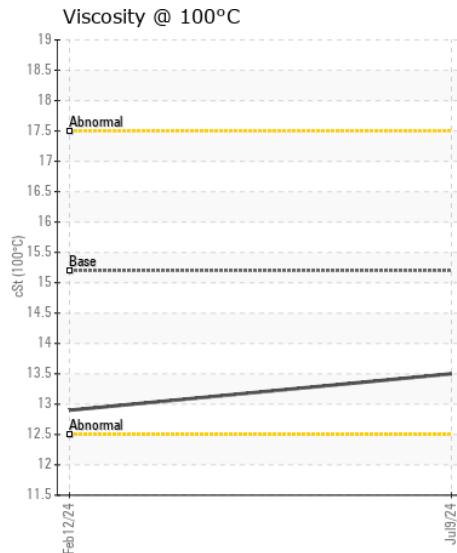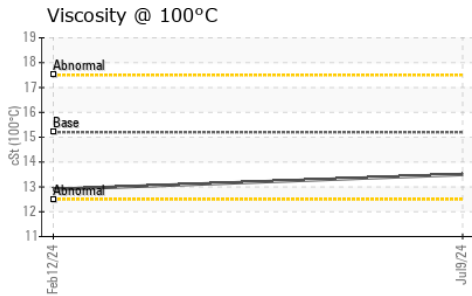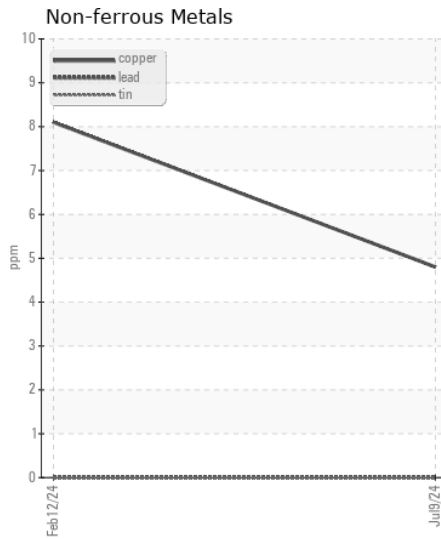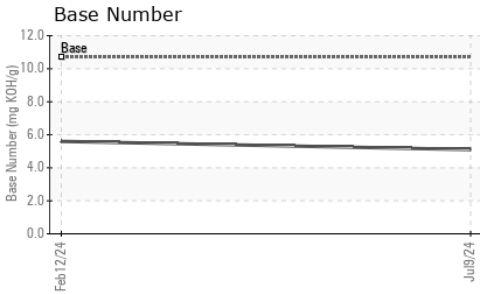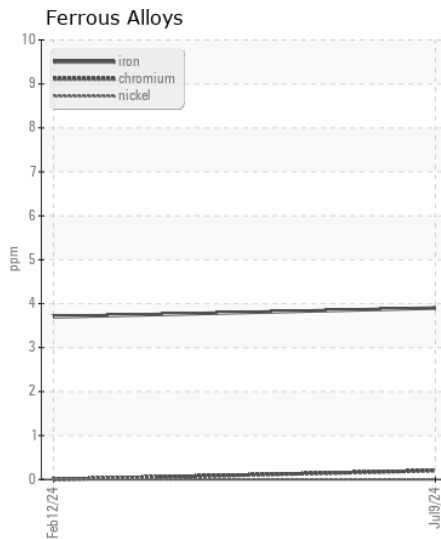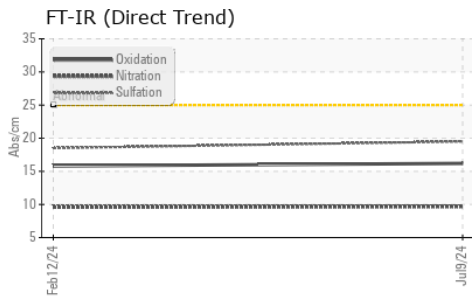

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111272
Lab Number : 06241375
Unique Number : 11130209
Test Package : FLEET

Received : 19 Jul 2024
Tested : 20 Jul 2024
Diagnosed : 20 Jul 2024 - Wes Davis

GFL Environmental - 981 - Port Arthur Hauling
 1000 S Business Park Dr
 Port Arthur, TX
 US 77640
 Contact: MICHAEL KAY
 mkay@gflenv.com
 T: (336)660-9331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)