



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
MACK 120062-SW8001
Component
Diesel Engine
Fluid
MOBIL DELVAC ELITE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111311	GFL0095465	GFL0095479
Sample Date		Client Info		02 Jul 2024	07 Mar 2024	20 Dec 2023
Machine Age	hrs	Client Info		6019	5434	4887
Oil Age	hrs	Client Info		585	0	500
Filter Age	hrs	Client Info		0	0	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	6	0	2
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	3	3
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	11	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	4	3
Potassium	ppm	ASTM D5185m	>20	9	5	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.3	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.6	8.2	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	17.7	17.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	1	2
Boron	ppm	ASTM D5185m		69	123	104
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		119	124	109
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		628	648	635
Calcium	ppm	ASTM D5185m		1258	1336	1148
Phosphorus	ppm	ASTM D5185m		701	742	683
Zinc	ppm	ASTM D5185m		830	865	759
Sulfur	ppm	ASTM D5185m		3043	3693	3011
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	14.4	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	5.7	7.0	6.2
Visc @ 100°C	cSt	ASTM D445	15.2	13.4	13.6	13.1


FT-IR (Direct Trend)

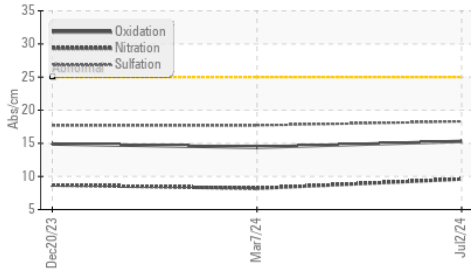


Ferrous Alloys

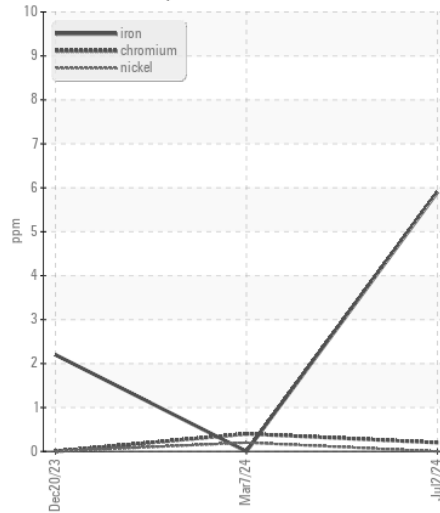


Base Number

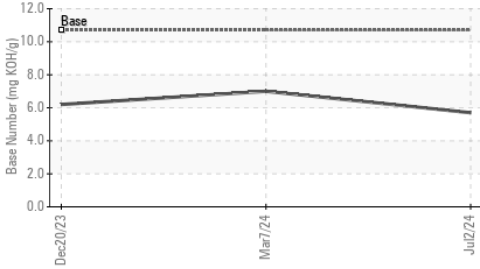


Non-ferrous Metals

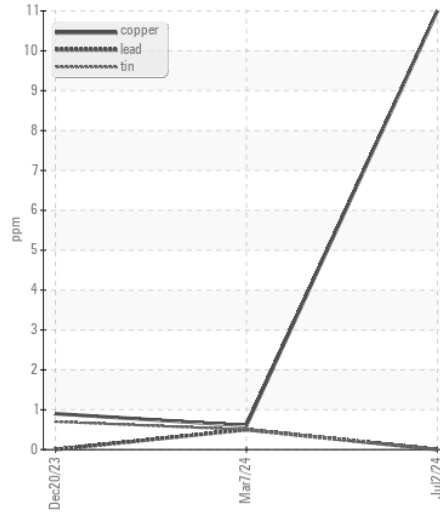


Viscosity @ 100°C

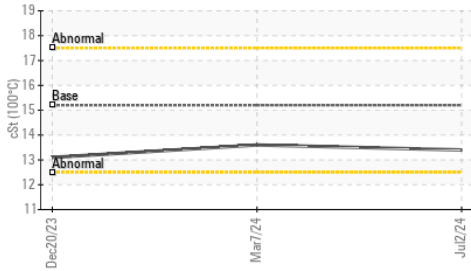

Viscosity @ 100°C

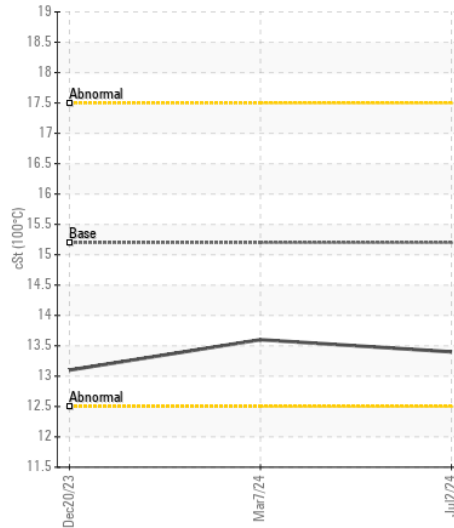

Base Number

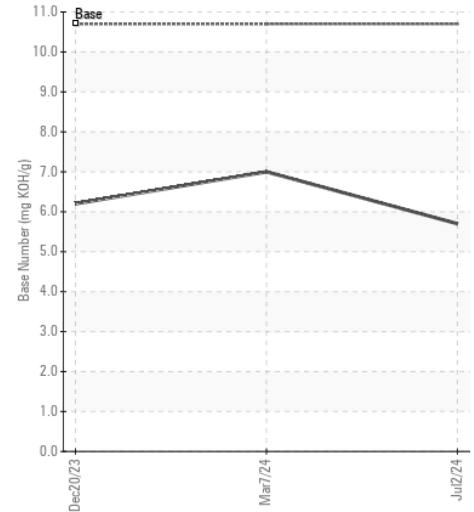

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111311
 Lab Number : 06241383
 Unique Number : 11130217
 Test Package : FLEET

Received : 19 Jul 2024
 Tested : 20 Jul 2024
 Diagnosed : 20 Jul 2024 - Wes Davis

GFL Environmental - 981 - Port Arthur Hauling
 1000 S Business Park Dr
 Port Arthur, TX
 US 77640
 Contact: MICHAEL KAY
 mkay@gflenv.com
 T: (336)660-9331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)