



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
GFL981
Machine Id
Component
PETERBILT 914067
Fluid
MOBIL DELVAC ELITE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL011288	GFL011280	---
Sample Date		Client Info		07 Jun 2024	20 Mar 2024	---
Machine Age	hrs	Client Info		661	582	---
Oil Age	hrs	Client Info		79	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>110	8	40	---
Chromium	ppm	ASTM D5185m	>4	<1	2	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	15	86	---
Lead	ppm	ASTM D5185m	>45	0	<1	---
Copper	ppm	ASTM D5185m	>85	1	13	---
Tin	ppm	ASTM D5185m	>4	0	1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	6	21	---
Potassium	ppm	ASTM D5185m	>20	43	253	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	9.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	23.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m		125	209	---
Barium	ppm	ASTM D5185m		0	3	---
Molybdenum	ppm	ASTM D5185m		115	126	---
Manganese	ppm	ASTM D5185m		0	6	---
Magnesium	ppm	ASTM D5185m		615	723	---
Calcium	ppm	ASTM D5185m		1243	1553	---
Phosphorus	ppm	ASTM D5185m		697	750	---
Zinc	ppm	ASTM D5185m		824	896	---
Sulfur	ppm	ASTM D5185m		3092	2839	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	19.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.1	7.8	---
Visc @ 100°C	cSt	ASTM D445	15.2	13.0	13.2	---

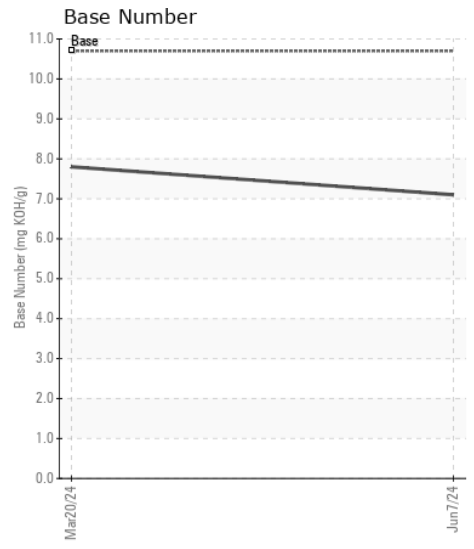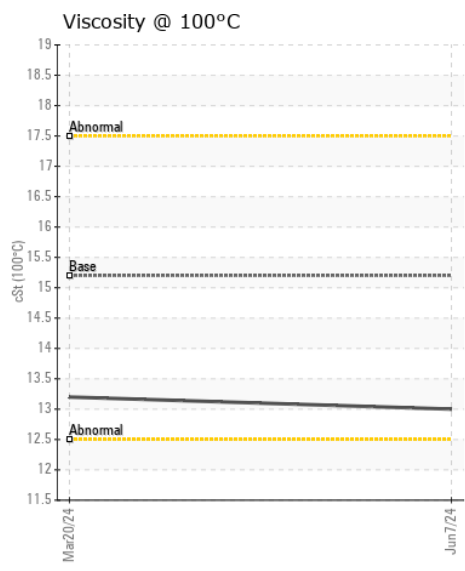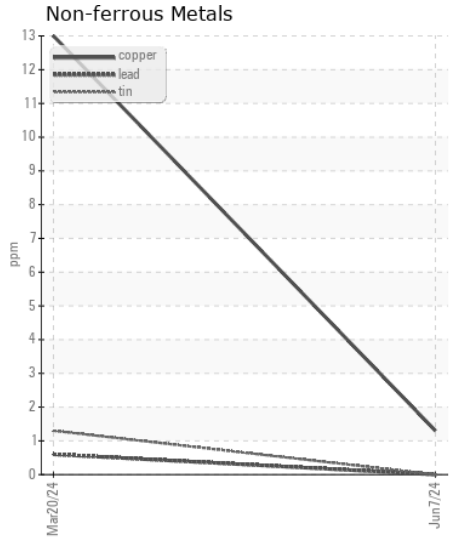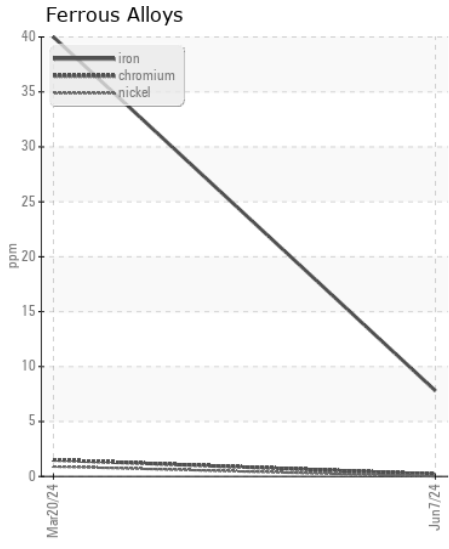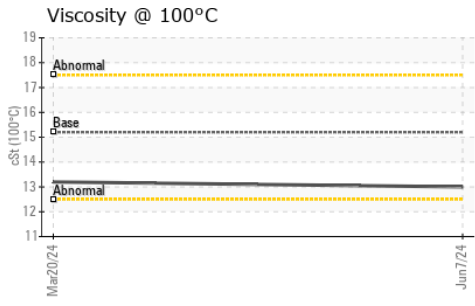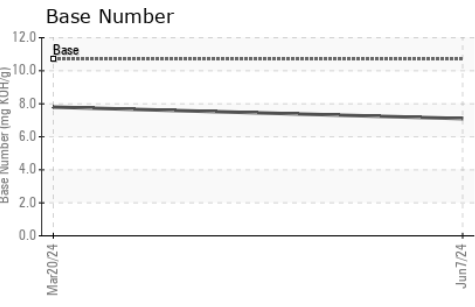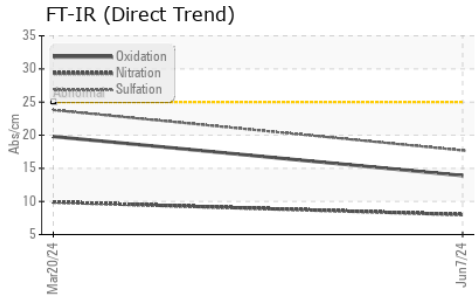

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111288
Lab Number : 06241410
Unique Number : 11130244
Test Package : FLEET
Received : 19 Jul 2024
Tested : 20 Jul 2024
Diagnosed : 20 Jul 2024 - Wes Davis

GFL Environmental - 981 - Port Arthur Hauling
 1000 S Business Park Dr
 Port Arthur, TX
 US 77640
 Contact: MICHAEL KAY
 mkay@gflenv.com
 T: (336)660-9331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)