



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
2M34
Machine Id

Component
FREIGHTLINER M2 106 MEDIUM DUTY JTK8461

Fluid
Diesel Engine

DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ARI0007563	ARI0007517	ARI0006832
Sample Date		Client Info		17 Jul 2024	12 Apr 2024	12 Jan 2024
Machine Age	mls	Client Info		32107	34223	31255
Oil Age	mls	Client Info		2884	2968	1458
Filter Age	mls	Client Info		2884	2968	1458
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>80	8	4	3
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	3	3
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>150	<1	0	0
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	5	4	5
Potassium	ppm	ASTM D5185m	>20	3	3	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.8	9.7	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	19.4	18.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	0	<1
Boron	ppm	ASTM D5185m	250	53	69	97
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	103	84	90
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	450	97	78	74
Calcium	ppm	ASTM D5185m	3000	2159	2025	1987
Phosphorus	ppm	ASTM D5185m	1150	955	951	1002
Zinc	ppm	ASTM D5185m	1350	1106	1103	1179
Sulfur	ppm	ASTM D5185m	4250	3931	3851	3643
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	15.2	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.9	6.2	6.9
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.7	13.7


FT-IR (Direct Trend)

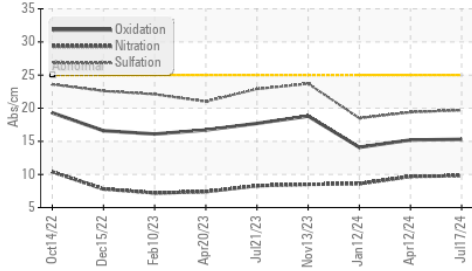


Base Number

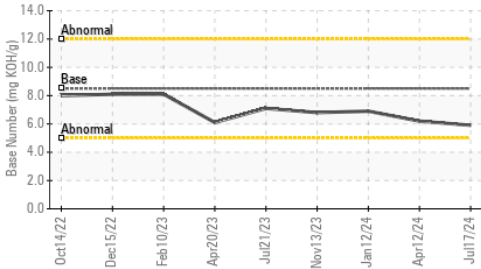


Viscosity @ 100°C

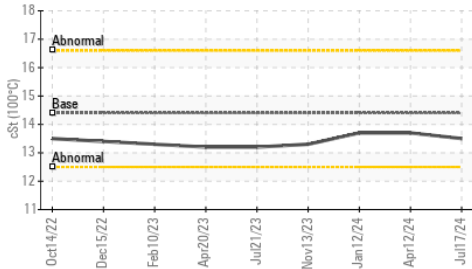


Ferrous Alloys

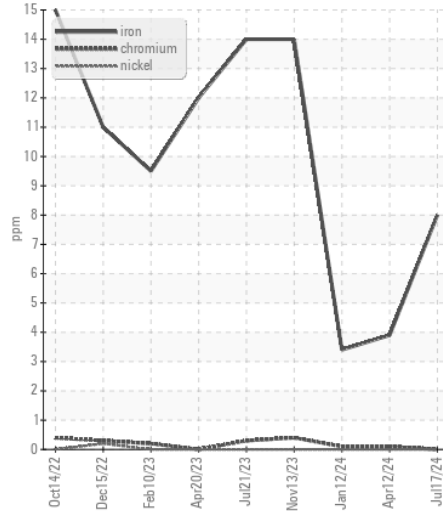


Non-ferrous Metals

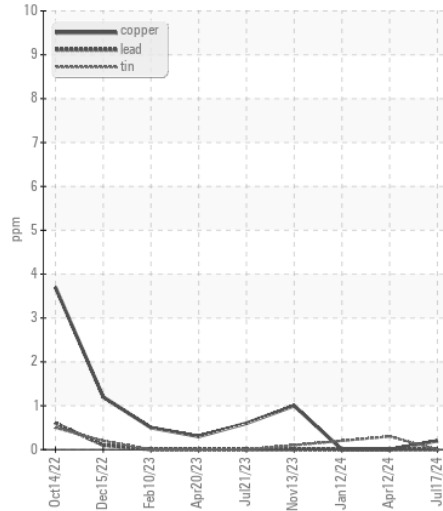

Viscosity @ 100°C

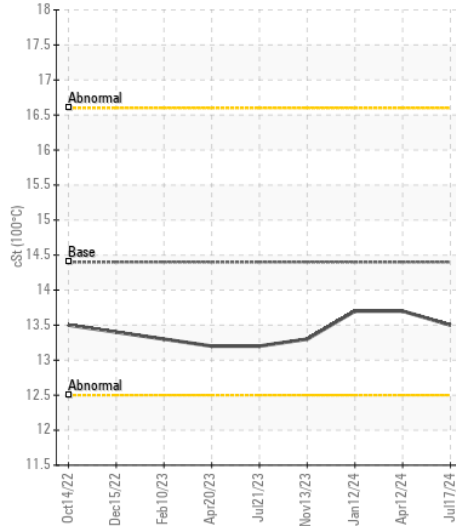

Base Number

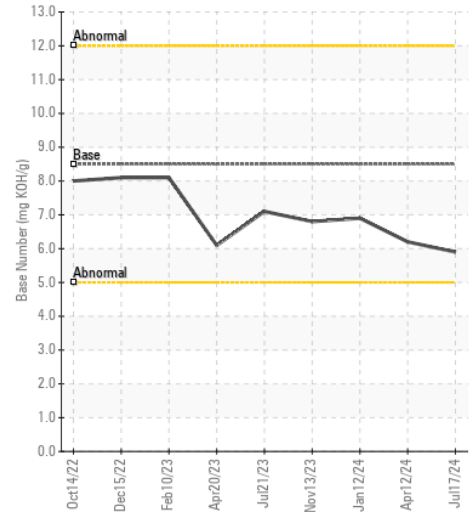

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ARI0007563

Lab Number : 06241488

Unique Number : 11130322

Test Package : CONST (Additional Tests: TBN)

Received : 19 Jul 2024

Tested : 20 Jul 2024

Diagnosed : 20 Jul 2024 - Wes Davis

INSITUFORM TECHNOLOGIES, INC

709 EAST ORDNANCE ROAD SUITE 501

BALTIMORE, MD

US 21226

Contact: ALBERT FRIEDRICH

AFRIEDRICH@INSITUFORM.COM

T: (240)388-1832

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)