



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**1E CAT8924KJPWR03917**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (15 GAL)**

### RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample.

### WEAR

All component wear rates are normal.











### CONTAMINATION

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0216001</b>	JR0198128	---
Sample Date		Client Info		<b>17 Jul 2024</b>	22 Feb 2024	---
Machine Age	hrs	Client Info		<b>13400</b>	13244	---
Oil Age	hrs	Client Info		<b>156</b>	13244	---
Filter Age	hrs	Client Info		<b>0</b>	13244	---
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	---
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	---
Sample Status				<b>SEVERE</b>	ATTENTION	---
PQ		ASTM D8184		<b>18</b>	11	---
Iron	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>75	<b>0</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 69094</b>	● 7753	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 12689</b>	● 1341	---
Particles >14µm		ASTM D7647	>160	<b>● 310</b>	57	---
Particles >21µm		ASTM D7647	>40	<b>36</b>	10	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 23/21/15</b>	● 20/18/13	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	99	---
Calcium	ppm	ASTM D5185m	87	<b>96</b>	3160	---
Phosphorus	ppm	ASTM D5185m	727	<b>699</b>	879	---
Zinc	ppm	ASTM D5185m	900	<b>874</b>	1180	---
Sulfur	ppm	ASTM D5185m	1500	<b>1997</b>	3090	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.73</b>	1.57	---
Visc @ 40°C	cSt	ASTM D445	65	<b>63.0</b>	58.0	---

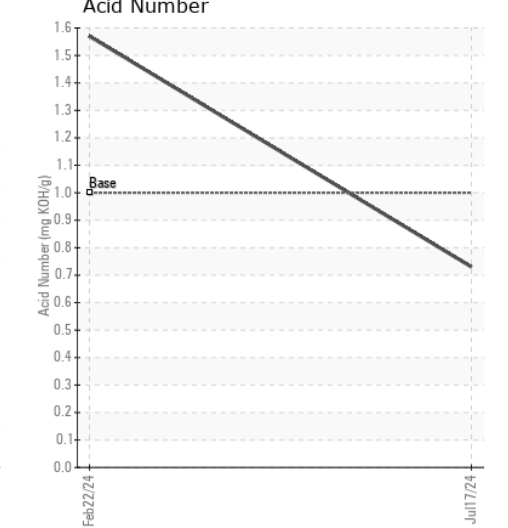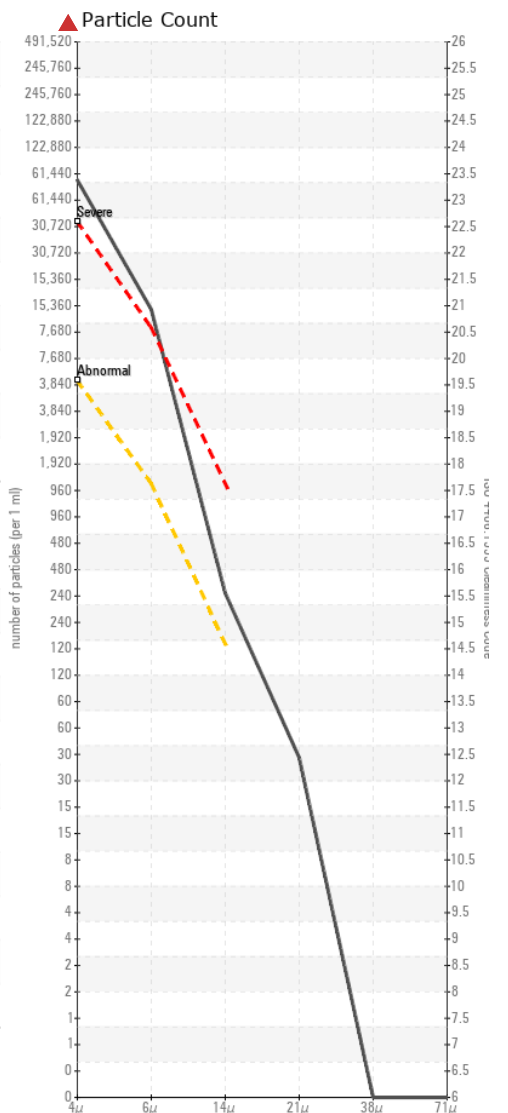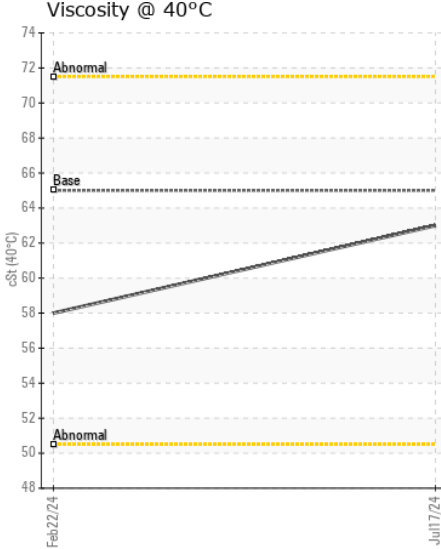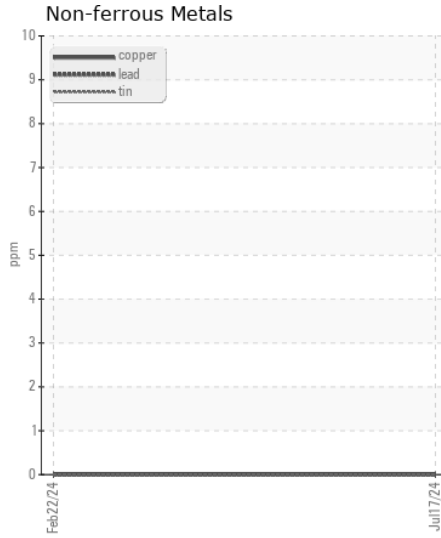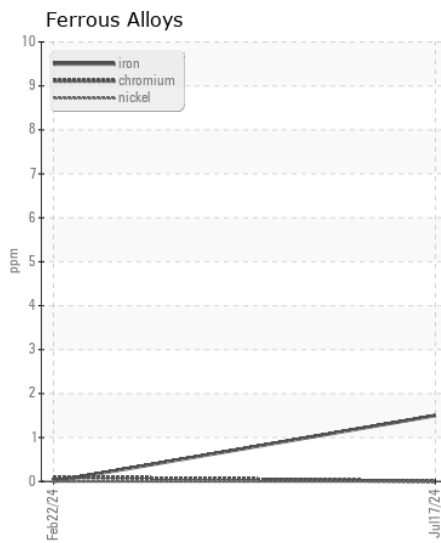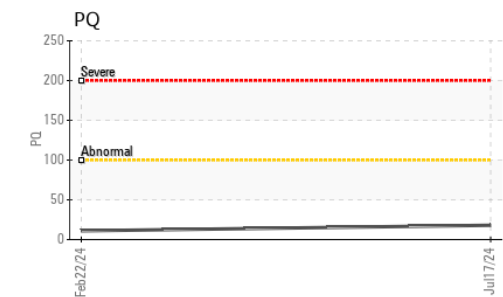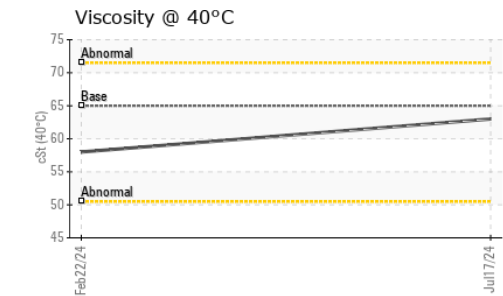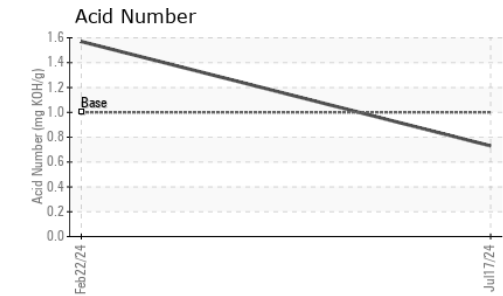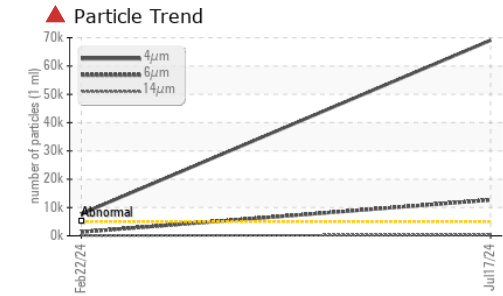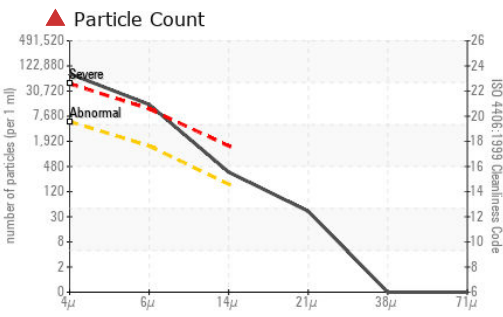

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0216001 **Received** : 19 Jul 2024  
**Lab Number** : 06241572 **Tested** : 22 Jul 2024  
**Unique Number** : 11130406 **Diagnosed** : 22 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)